


BYV32-50 THRU BYV32-200

FAST EFFICIENT PLASTIC RECTIFIER

Reverse Voltage - 50 to 150 Volts Forward Current - 18.0 Amperes

TO-220AB

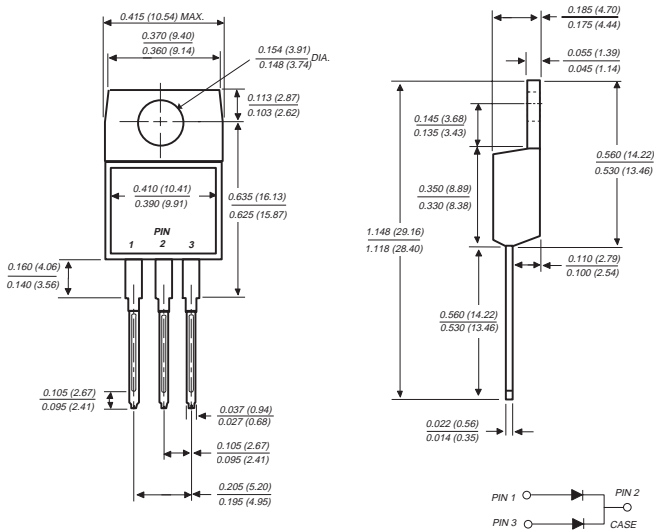

Dimensions in inches and (millimeters)

FEATURES

- ◆ Dual rectifier construction, positive centertap
- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ Low power loss
- ◆ Low forward voltage, high current capability
- ◆ High surge capability
- ◆ Superfast recovery time for high efficiency
- ◆ High temperature soldering guaranteed: 250°C, 0.16" (4.06mm) from case for 10 seconds



MECHANICAL DATA

Case: JEDEC TO-220AB molded plastic body over passivated chips

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Polarity: As marked

Mounting Position: Any

Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| | SYMBOLS | BYV32-50 | BYV32-100 | BYV32-150 | BYV32-200 | UNITS |
|---|------------------------------------|---------------|-----------|-----------|-----------|--------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 150 | 200 | Volts |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 105 | 140 | Volts |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 150 | 200 | Volts |
| Maximum average forward rectified current at $T_C=120^\circ\text{C}$ | $I_{(AV)}$ | 18.0 | | | | Amps |
| Peak forward surge current 10ms single half sine-wave superimposed at at $T_J=150^\circ\text{C}$ | I_{FSM} | 150.0 | | | | Amps |
| Maximum instantaneous forward voltage per leg at: $I_F=20\text{A}$ $I_F=5.0\text{A}, T_J=100^\circ\text{C}$ | V_F | 1.15 0.85 | | | | Volts |
| Maximum DC reverse current at rated DC blocking voltage $T_C=25^\circ\text{C}$ $T_C=100^\circ\text{C}$ | I_R | 10.0 600.0 | | | | μA |
| Maximum reverse recovery time per leg (NOTE 1) | t_{rr} | 25.0 | | | | ns |
| Typical junction capacitance per leg (NOTE 2) | C_J | 45.0 | | | | pF |
| Maximum thermal resistance per leg (NOTE 3) | $R_{\theta JA}$ $R_{\theta JC}$ | 20.0 3.0 | | | | $^\circ\text{C/W}$ |
| Operating and storage temperature range | T_J, T_{STG} | -65 to +150 | | | | $^\circ\text{C}$ |

NOTES:

- (1) Reverse recovery test conditions: $I_F=1\text{A}$ $V_R=30\text{V}$, $di/dt=100\text{A}/\mu\text{s}$, $I_{rr}=10\% I_{RM}$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient and from junction to case per leg mounted on heatsink

RATINGS AND CHARACTERISTIC CURVES BYV32-50 THRU BYV32-200

FIG. 1 - FORWARD CURRENT DERATING CURVE

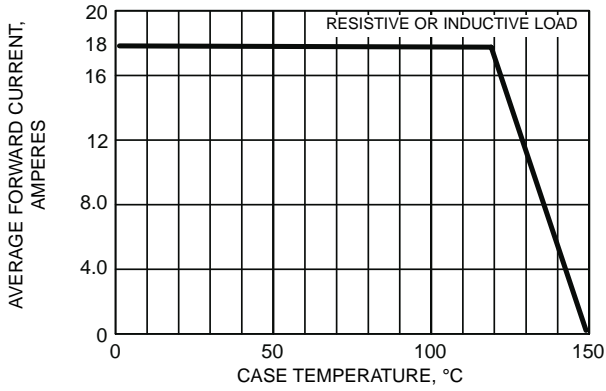


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

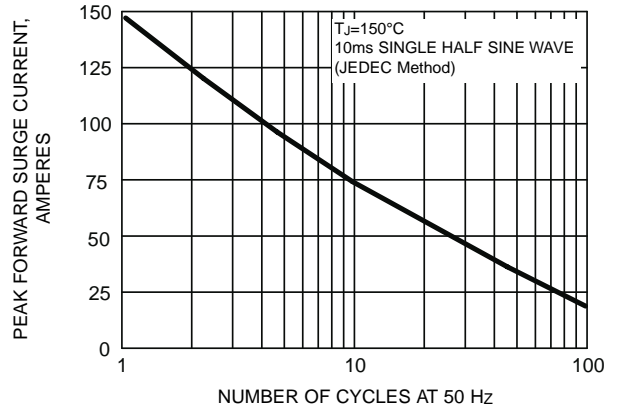


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

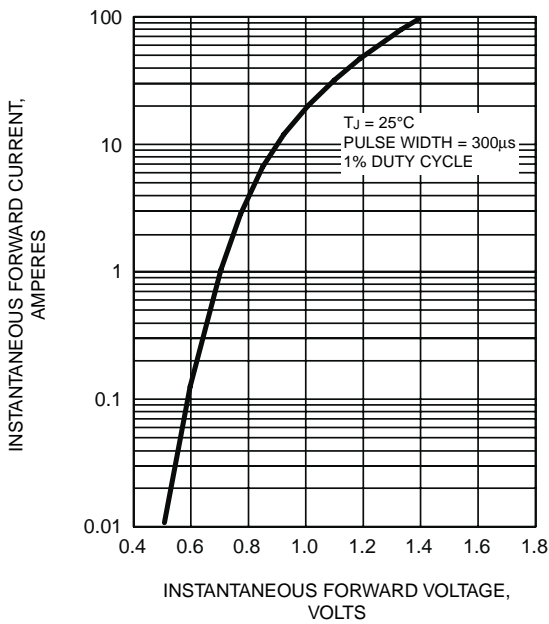


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS PER LEG

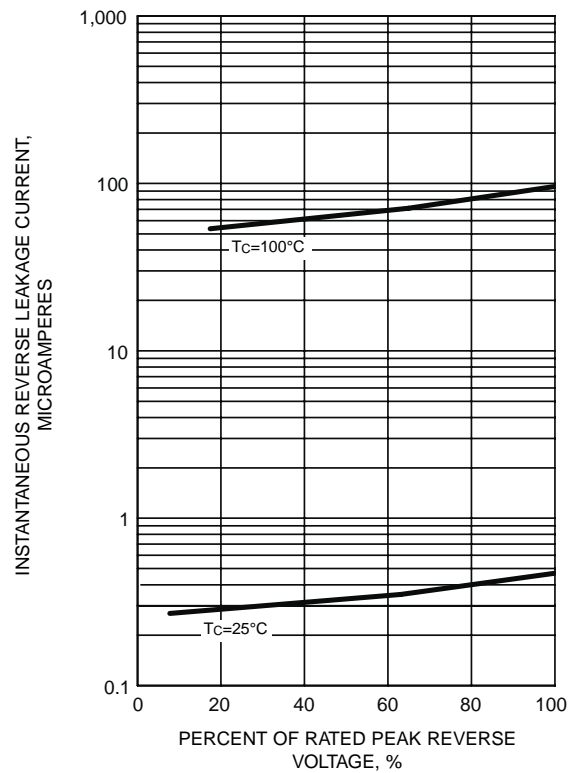


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG

