
PCB relays – Pin or SMD – for DC operation, polarised, monostable or bistable

Features

- Universal ultra miniature relay with optimum capabilities
- Directly triggerable with TTL standard modules such as ALS, HCT and ACT
- Especially high sensitivity
- Extremely small size:
 - base area only 0.98 cm² or 1.07 cm²
 - volume only 0.68 cm³ or 0.85 cm³
- Relay system encapsulated in epoxy resin, thus especially immune to environmental influences
- Very high grade of shock resistance

Versions

- Relay types: monostable, 1 winding or bistable, 2 windings or bistable, 1 winding
- With 1 changeover contact
- With bifurcated contacts
- FCC version on request. Testing of open contacts with surge voltage in accordance with FCC 68.302 (1.5 kV, 10/160 µs) passed
- Automatically placeable from bar magazines (e.g. on Siemens HS-180)
- For SMD configuration, strap packaging possible on request
- For printed circuit assembling
- Immersion cleanable

Typical applications

- Storage element for input and output equipment
- Data and communication technology
- Medical equipment
- Measurement and control equipment
- Automobile technology
- Safety engineering
- Toy engineering

Approvals



CECC

Option: with qualification approval in accordance with CECC 16501-002/VDE 400.74/04.90 for pin version



CSA

File LR 45064-5





UL

File E 48393

Miniature Relay P1


Pin version

Dimension drawing (in mm)

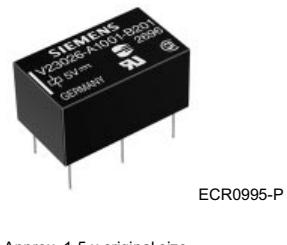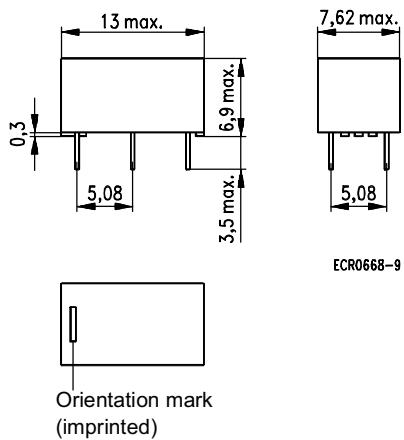

Mounting hole layout

View on the terminals

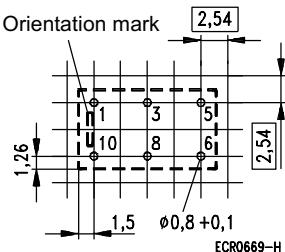


Basic grid 2.54 mm according to EN 60097 and DIN 40803

Terminal assignment


View on the terminals

Monostable and bistable,
1 winding



The contact position illustrated shows the release condition.
If a positive potential is applied to terminal 3, the relay adopts the operating position.

Bistable,
2 windings




The contact position illustrated shows the release condition.
If a positive potential is applied to terminal 3 or a negative potential to terminal 6 as against terminal 8, the relay adopts the operating position.


Miniature Relay P1

SMD version

Dimension drawing (in mm)

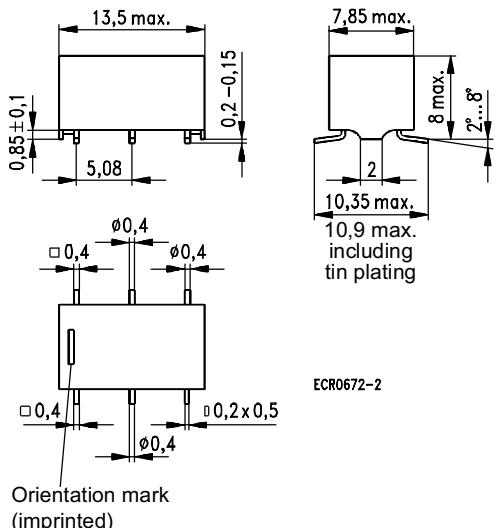

ECR0672-2




ECR0994-G

Approx. 1.5 x original size

Solder pad layout

Attention: View onto the component side of the PCB!

Orientation mark

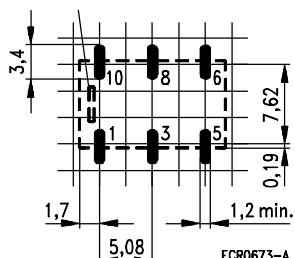


ECR0673-A

Terminal assignment

View on the terminals


Monostable and bistable,
1 winding



ECR0670-K

The contact position illustrated shows the release condition.
If a positive potential is applied to terminal 3, the relay adopts the operating position.

Bistable,
2 windings



ECR0671-T


The contact position illustrated shows the release condition.
If a positive potential is applied to terminal 3 or a negative potential to terminal 6 as against terminal 8, the relay adopts the operating position.

Miniature Relay P1

Contact data

| | |
|---|----------------------------|
| Number of contacts and type | 1 changeover contact |
| Contact assembly | Bifurcated contacts |
| Contact material | Pd Ni, Au Rh coated |
| Limiting continuous current at max. ambient temperature | 1 A |
| Maximum switching current | 1 A |
| Maximum switching voltage | 125 V~ 150 V- |
| Maximum switching capacity | 30 W, see load limit curve |
| DC voltage | 60 VA |
| AC voltage | |
| Recommended for load voltages greater than | 100 µV |
| Contact resistance (initial value) / measuring current / driver voltage | ≤ 50 mΩ / 10 mA / 20 mV |

Load limit curve

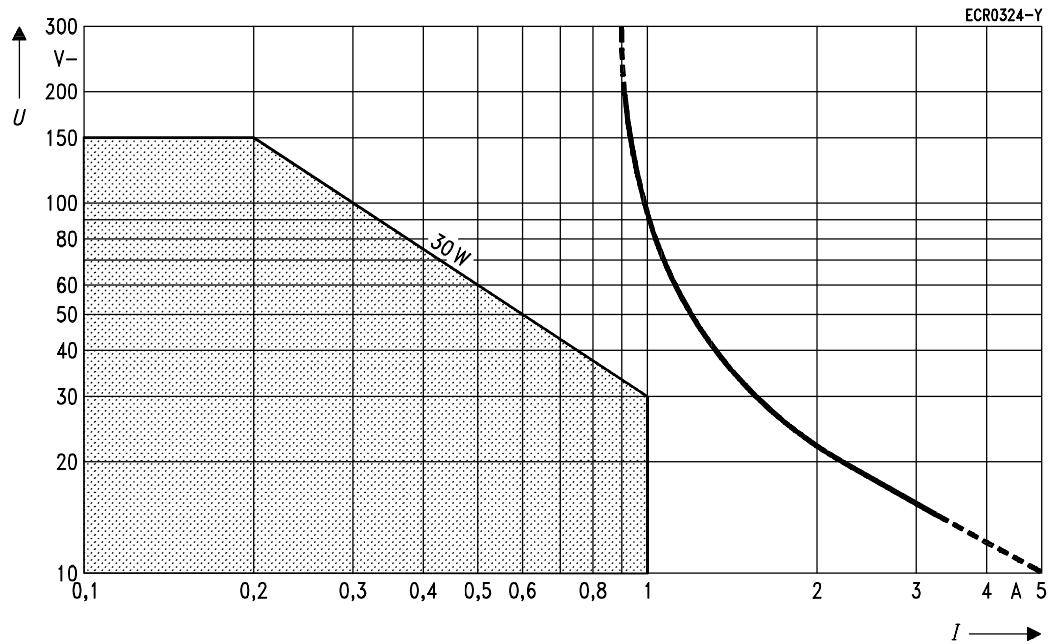

I = switching current

U = switching voltage

■ = recommended application field

Load limit curve: Safe shutdown, no stationary arc > 10 ms

Miniature Relay P1

Coil data

| | |
|---|---|
| Nominal voltages | From 1.5 V– to 24 V– |
| Nominal power consumption monostable with 1 winding bistable with 2 windings bistable with 1 winding | 65 ... 130 mW 65 ... 150 mW 30 ... 130 mW |
| Operative range/pick-up class according to IEC 255-1-00 and VDE 0435 Part 201 | 1/a |
| Maximum operate voltage | 75 % of nominal voltage |
| Maximum release voltage (bistable) | 75 % of nominal voltage |
| Minimum release voltage (monostable) | 10 % of nominal voltage |

U_l = Minimum voltage at 20 °C after pre-energizing with nominal voltage without contact current

U_{ll} = Maximum continuous voltage at 20 °C

The operating voltage limits U_l and U_{ll} are dependent on the temperature according to the formulae:

$$U_{l\text{tamb}} = k_l \cdot U_{l\text{20°C}}$$

and


$$U_{ll\text{tamb}} = k_{ll} \cdot U_{ll\text{20°C}}$$

t_{amb} = Ambient temperature

$U_{l\text{tamb}}$ = Minimum voltage at ambient temperature t_{amb}

$U_{ll\text{tamb}}$ = Maximum voltage at ambient temperature t_{amb}

k_l a. k_{ll} = Factors (dependent on temperature), see diagram

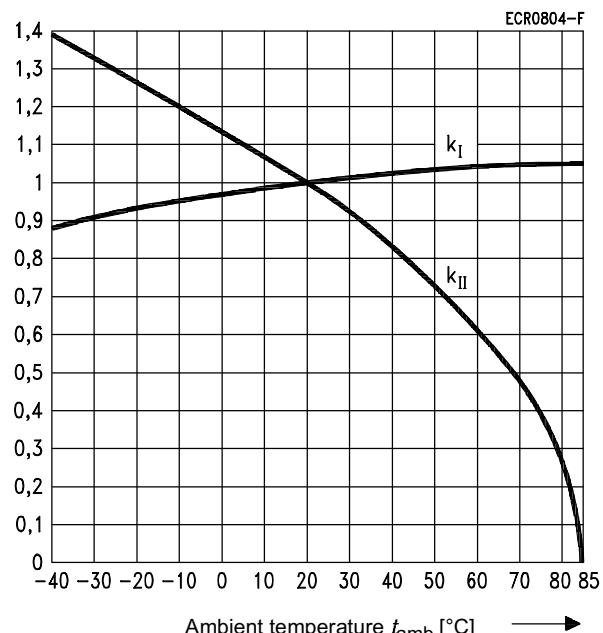

Miniature Relay P1

Coil versions

| Nominal voltage U_{nom} V- | Operating voltage range at 20 °C | | Resistance at 20 °C | Coil number Ordering code block 2 |
|---|---------------------------------------|--|------------------------|--------------------------------------|
| | Minimum voltage, U_{I} V- | Maximum voltage, U_{II} V- | Ω | |

Pin version

monostable, 1 winding -A1***

| | | | | |
|----|------|------|------------|-----|
| 3 | 2.25 | 8.8 | 137 ± 14 | 006 |
| 5 | 3.75 | 14.5 | 370 ± 37 | 001 |
| 12 | 9 | 35 | 2250 ± 225 | 002 |
| 24 | 18 | 50 | 4500 ± 450 | 004 |

bistable, 2 windings (windings I and II identical) -B1***

| | | | | |
|----|---|-------|------------|-----|
| 3 | 2.25 | 8.55 | 130 ± 13 | 106 |
| 5 | 3.75 | 14.75 | 390 ± 39 | 101 |
| 12 | 9 | 29 | 1500 ± 150 | 102 |
| 24 | A nominal voltage of 24 V is feasible with a 12 V winding with a series resistor (1500 Ω) | | | |

bistable, 1 winding -C1***

| | | | | |
|------------------|------|----|------------|-----|
| 3 | 2.25 | 13 | 300 ± 30 | 056 |
| 5 | 3.75 | 20 | 740 ± 74 | 051 |
| 12 | 9 | 50 | 4500 ± 450 | 052 |
| 24 ¹⁾ | 18 | 50 | 4500 ± 450 | 054 |

SMD version

monostable, 1 winding -D1***

| | | | | |
|----|------|------|------------|-----|
| 3 | 2.25 | 8 | 113 ± 11 | 026 |
| 5 | 3.75 | 13.3 | 313 ± 31 | 021 |
| 12 | 9 | 35 | 1800 ± 180 | 022 |
| 24 | 18 | 50 | 4500 ± 450 | 024 |

bistable, 2 windings (windings I and II identical) -E1***

| | | | | |
|----|---|-------|------------|-----|
| 3 | 2.25 | 8.55 | 130 ± 13 | 106 |
| 5 | 3.75 | 14.75 | 390 ± 39 | 101 |
| 12 | 9 | 29 | 1500 ± 150 | 102 |
| 24 | A nominal voltage of 24 V is feasible with a 12 V winding with a series resistor (1500 Ω) | | | |

bistable, 1 winding -F1***

| | | | | |
|------------------|------|----|------------|-----|
| 3 | 2.25 | 13 | 300 ± 30 | 056 |
| 5 | 3.75 | 20 | 740 ± 74 | 051 |
| 12 | 9 | 50 | 4500 ± 450 | 052 |
| 24 ¹⁾ | 18 | 50 | 4500 ± 450 | 054 |

1) At 24 V operation of the 12 V winding with a series resistor of 4500 Ω results in reduced power consumption.

Further coil versions e.g. 1.5 V, 9 V or 15 V are available on request.

Miniature Relay P1

General data

| | |
|--|---|
| Operate time at U_{nom} and at 20 °C, typ. | 1 ms |
| Release time at U_{nom} and at 20 °C (bistable), typ. | 1 ms |
| Release time without/with diode in parallel (monostable), typ. | 0.4 ms/1.2 ms |
| Maximum switching rate without load | 200 operations/s |
| Ambient temperature according to IEC 255-1-00 / VDE 0435 Part 201 | -40 °C ... +70 °C (... +85 °C on request) |
| Thermal resistance | 130 K/W |
| Maximum permissible coil temperature | 85 °C |
| Vibration resistance (function), frequency range according to IEC 68-2-6 | 20 g, 200 - 2000 Hz 40 g, 10 - 200 Hz |
| Shock resistance (function), half sinus, 11 ms according to IEC 68-2-27 | 50 g |
| Degree of protection according to IEC 529 / VDE 0470 Part 1 | immersion cleanable, IP 67 sealing corresponds to IEC 68-2-17, method Qc 2 |
| Electrical endurance for resistive load: 6 V–, 100 mA 24 V–, 1 A | approx. 5×10^7 operations approx. 3×10^6 operations |
| Mechanical endurance | approx. 1×10^9 operations |
| Flammability | flame resistance according to IEC 695-2-2 |
| Mounting position | any |
| Processing information | ultrasonic cleanable |
| Weight (mass) | approx. 1.8 g |

Insulation

| | |
|---|---|
| Insulation resistance at 500 V | $\geq 10^9 \Omega$ |
| Dielectric test voltage contact / winding (1 min) | 1500 V~ _{rms} (2000 V~ _{rms} on request) |
| Dielectric test voltage at open contact (1 min) | 500 V~ _{rms} |
| Clearances/creepage distances coil/contact | 0.75 mm / 0.75 mm |

Note: Relays with surge voltage resistance of 2.5 kV, 2/10 µs on request

Miniature Relay P1

Ordering code

| Data position | Block 1 | | | | | | Block 2 | | | | | Block 3 | | | | |
|---------------|---------|---|---|---|---|---|---------|---|---|----|----|---------|----|----|----|--|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | |
| V | 2 | 3 | 0 | 2 | 6 | - | | | | | - | B | 2 | 0 | 1 | |
| | | | | | | | | | | | | | | | | |

Identification of the Miniature Relay P1 _____

Relay type _____

Pin version:
A1 = monostable, 1 winding
B1 = bistable, 2 windings
C1 = bistable, 1 winding

SMD version:
D1 = monostable, 1 winding
E1 = bistable, 2 windings
F1 = bistable, 1 winding

Coil number _____

Pin version:
monostable, 1 winding
006 = 3 V nominal voltage
001 = 5 V
002 = 12 V
004 = 24 V

SMD version:
monostable, 1 winding
026 = 3 V nominal voltage
021 = 5 V
022 = 12 V
024 = 24 V

Pin- and SMD version:
bistable, 2 windings
106 = 3 V nominal voltage
101 = 5 V
102 = 12 V

Pin- and SMD version:
bistable, 1 winding
056 = 3 V nominal voltage
051 = 5 V
052 = 12 V
054 = 24 V

Contact arrangement / material _____
B201 = 1 changeover contact; palladium nickel, gold-plated, rhodium-coated

Ordering example: V23026-B1102-B201

Miniature relay P1, Pin version, bistable, coil with 2 windings, 12 V nominal voltage

Note:

The ordering scheme enables a multitude of variations. However, not all variations are defined as construction specifications (ordering code) and thus in the current delivery program.

Special designs can be carried out to customer specifications. Please contact your local representative. The addresses are given on the back page.

Siemens in your area

Africa

Republic of South Africa

Siemens
Components Division
Stand No. 2, Fedlife Park
Midrand 1685 P.R.Bag X71
Halfway House 1685-Südafrika
Tel: (011) 315-19 50
FAX (011) 315-19 68

America

Argentina

Siemens S.A.
Av.Gral. Roca 1865
Ruta 8, Km. 18
RA-1650 San Martin
Pcia, de Buenos Aires
Tel: (01) 738 7175
FAX (01) 738 7153

Brazil

Icotron S.A.
Sede Central
Vendas Mercado Nacional
Avenida Muttinga, 3650
Pirituba
BRA-05150-900
São Paulo-SP
Tel: (011) 836-22 11
FAX (011) 836-27 69

Canada

Siemens Electric Ltd.
2185 Derry Road West
Mississauga
CDN-ON L5N/Canada
Tel: (0905) 819-8000
FAX (0905) 819-5777

Mexico

Siemens S.A. de C.V.
Poniente 116, No. 590
Col. Und. Vallejo
Delegacion Azcapotzalco
MEX-02300 México,D.F.
Tel: (05) 328 20 00
FAX (05) 328 21 92

USA

Siemens
Electromechanical
Components Inc.
Headquarters
200 S. Richland Creek Drive
USA-Princeton
Indiana 47671-0001
Tel: (0201) 386 1000
FAX (0201) 386 2289

Asia

Hong Kong

Siemens Ltd.
58/F Central Plaza
18 Harbour Read
Wanchai
Hong Kong
Tel: 2583 33 88
FAX 2802 98 02

India

Siemens Limited
P.O.Box 5212
Jyothi Mahal, 3rd floor
49, St.Mark's road
IND-Bangalore 560001
Tel: (080) 227 2101
FAX (080) 227 2418

Siemens Limited
P.O.Box 6597
134, Dr. Annie Besant Road
Worly
IND-Bombay 400018
Tel: (022) 493 8780
FAX (022) 493 0656

Siemens Limited
P.O.Box 7036
4A, Ring Road
I.P.Estate
IND-New Dehli 110002
Tel: (011) 331 8144,
FAX (011) 331 4178

Japan
Siemens K.K.
Takanawa Park Tower, 19F
20-14 Higashi-Gatanda
3-chome
Shingawa-ku,
Tokyo 141
Tel: (03) 5423-8500
FAX (03) 5423-8725

Korea

Siemens Ltd.
Asia Tower Building,
10th Floor
726, Yeoksam-dong,
Kangnam-Gu
C.P.O.B. 3001

Seoul-Korea

Tel: (02) 527 7700
FAX (02) 527 7719

Singapore

Siemens (Pte.) Ltd.
2, Kallang Sector
SGP-Singapore 1334

Tel: 841 3528
FAX 841 3529

Taiwan

Siemens Ltd.
6th Floor
Cathay Life Ins. Bldg.
296, Jen-Ai Road, Sec. 4
P.O.B. 58284
Taipei 106

Tel: (02) 325-48 88
FAX (02) 705-49 75

Thailand

Siemens Systems Ltd
Cham Issara Towerl, 25/F
2922/283 New Petchburi
Read
Bangkapi, Huay Kwang
Bangkok 10310
Tel: (02) 308 2011
FAX (02) 308 2411

Australia

Australia

Siemens Ltd.
Melbourne Head Office
544, Church Street
Richmond Vic. 3121
AUS-Melbourne, Vic. 3121
Tel: (03) 9420 7111
FAX (03) 9420 7309

Europe

Belgium

Siemens S.A.
Chaussée de Charleroi 116
B-1060 Bruxelles
Tel: (02) 536-2111
FAX (02) 536-2492

Czech Republic

Siemens
Elektropristroje s.r.o.
Komenskeho 821
CZ-54101 Trutnov
Tel: (0439) 805 111
FAX (0439) 805 198

Denmark

Siemens A/S
Borupvang 3
DK-2750 Ballerup
Tel: (045) 4477-4477
FAX (045) 4477-4488

Finland

Siemens Osakeyhtiö
Perkkää
Majurinkatu 6
P.O.B. 60
FIN-02601 Espoo
Tel: (080) 51 05-1
FAX (080) 51 05-24 95

France

Siemens S.A.
39-47, Boulevard Ornano
F-93527 Saint-Denis
Cedex 2
Tel: (01) 49 22-31 00
FAX (01) 49 22-34 13

Great Britain

Siemens plc
Siemens House, Oldbury
Bracknell
GB-RG 12 8FZ
Tel: (01344) 39-6000
FAX (01344) 39-6133

Greece

Siemens A.E.
Paradissou & Artemidos
P.O.B. 61011
GR-15110 Amaroussio/Athens
Tel: (01) 68 64-234
FAX (01) 68 64-211

Norway

Siemens A/S
Ostre Aker vei 90
Postboks 10, Veitvet
N-0518 Oslo 5
Tel: (022) 63 30 00
FAX (022) 63 49 13

Hungary

SIMACOMP Kft
Lajos u. 103
H-1300 Budapest
Tel: (01) 457-1501
FAX (01) 168-1502

Iceland

Smith & Norland H/F
Nótuni 4,
P.O.B. 519
IS-121 Reykjavik
Tel: 511 3000
FAX 511 3011

Ireland

Siemens Ltd.
Electronic Components
Division
8 Raglan Road
IRL- Dublin 4

Tel: (01) 603-22 00
FAX (01) 603-23 49

Italy

Siemens S.p.A.
Via dei Valtorta 48
I-20127 Milano
Tel: (02) 6676-1
FAX (02) 6676-43 39

Luxembourg

Siemens S.A.
20, Rue des Peupliers
B.P.1701

L-1017 Luxembourg
Tel: 43843-1
FAX 43843-222

Netherlands

Siemens Nederland N.V.
Prinses Beatrixlaan 26
Postbus 1 60 68
NL-2500 AN Den Haag

Tel: (070) 333-27 44
FAX (070) 333-28 15

Norway

Siemens A/S
Ostre Aker vei 90
Postboks 10, Veitvet
N-0518 Oslo 5

Tel: (022) 63 30 00
FAX (022) 63 49 13

Poland

Siemens Sp. z.o.o.
ul. Zupnicza 11
PL- 03-821 Warsaw
Tel: (022) 670 9000
FAX (022) 670 9009

Portugal

Siemens S.A.
Estrada Nacional
117, Km 2,6
Apartado 60300
P-2700 Amadora
Tel: (01) 417-8000
FAX (01) 417-8044

Spain

Siemens S.A.
Ronda de Europa No. 5
E-28760 Tres Cantos - Madrid
Tel: (01) 8031200
FAX (01) 803 4159

Sweden

Siemens AB
Components
Österögaten 1
Box 46
S-16493 Kista
Tel: (08) 703-3500
FAX (08) 703-3501

Turkey

SIMKO
Ticaret ve Sanayi A.S.
Medlici Mebusan Cad.125
TR-80040 Findikli/Istanbul
Tel: (0212) 251 0900
FAX (0212) 252 4134

Our range of products:

- Relays
- Angle sensors
- Coils
- Connectors
- Switches and pushbuttons
- Hybrids
- Fiber Optics

Information on any of the above product groups is available from your local office.

© Siemens AG 1996. All Rights Reserved.
The information merely serves to specify the components and does not guarantee characteristics.
We are not able to guarantee that the specified circuits, descriptions and tables are not covered by rights of third parties. Terms of delivery and rights to change design reserved.

Issued by Electromechanical Components Group (EC)
Hofmannstraße 51, D-81359 Munich

Siemens Aktiengesellschaft

Ref. No. A23001-G11-P060-X-7600

Edition: 06/96 PS 06962.0
Printed in Germany