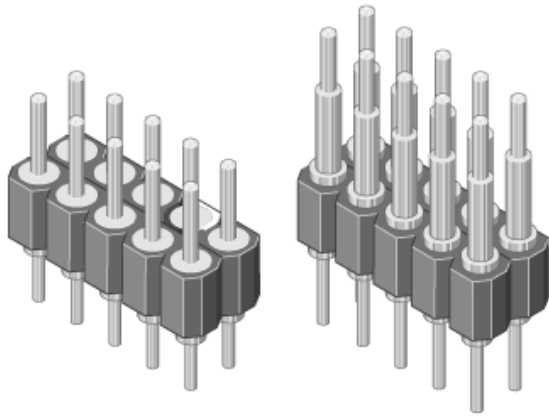



**Order code: 034-2-064-D-N1T-XS0**


2) PIN-ADAPTOR, SPECIAL PIN HEADER


Series: **034**

Pin headers available with many different contact options.

Double row socket strips (DIL)



Pitch (mm) 2,54  
 Board termination  Through hole  
 No of contacts 64  
 Contact type N1 - AS 6-0,47

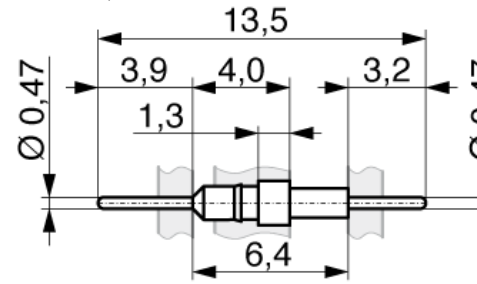

Material contact Copper alloy  
 Material insulator High temp. thermoplast UL94V-0  
 Rated current 3,0 A  
 Rated voltage 150 VRMS / VDC  
 Withstand voltage 1000 VRMS for 1 minute  
 Operating temperature -55°C to +125°C  
 Max. processing temper. 260°C for 10 seconds  
 Packaging Standard

**Order code: 034-2-064-D-N1T-XS0**

MPE Garry GmbH  
 Schäfflerstraße 13  
 87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0  
 Fax: +49 (0) 83 62 / 91 56-500  
 Email: [vk@mpe-connector.de](mailto:vk@mpe-connector.de)

Date: 13.03.2013 Internet: [http://www.mpe-connector.de/index.php?lang=en&menu=4&s\\_product=034-2-064-D-N1T-XS0](http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=034-2-064-D-N1T-XS0)