

# PC920 Power OPIC Photocoupler

T-41-83

## Features


1. High power  
 $(I_{O1} : \text{MAX. } -0.8\text{A (DC)})$   
 $(I_{O2} : \text{MAX. } 1.6\text{A (Pulse)})$
2. Low input current drive  
 $(I_{FLH} : \text{MAX. } 2\text{mA at } T_a = T_{opr})$
3. Operating supply voltage  $V_{CC} : 5.4 \sim 15\text{V}$
4. Compact single-in-line package (With heat sink)
5. UL recognized, file No. E64380

## Applications

1. Inverter controlled air conditioners

## Outline Dimensions

(Unit : mm)

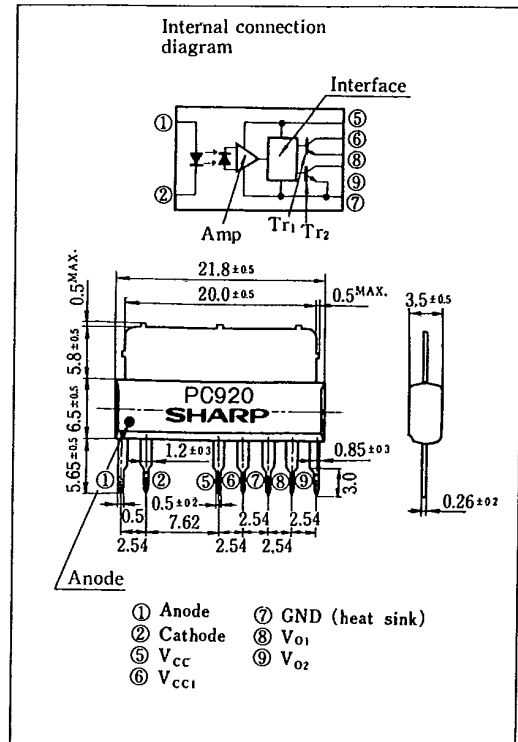

※ OPIC is a registered trademark of Sharp and stands for Optical IC. It has a light detecting element and signal processing circuitry integrated onto a single chip.

## Absolute Maximum Ratings

( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Rating	Unit
Input	Forward current	$I_F$	50 mA
	Reverse voltage	$V_R$	6 V
	Power dissipation	$P$	70 mW
Output	Supply voltage	$V_{CC}$	16 V
	$V_{O1}$ output current	$I_{O1}$	-0.8 A
	*1 $V_{O2}$ output current	$I_{O2P}$	1.6 A
	Total power dissipation	$P_{tot}$	1,200 mW
*2 Isolation voltage	$V_{iso}$	1,500	Vrms
Operating temperature	$T_{opr}$	-20 ~ +80	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 ~ +125	$^\circ\text{C}$
*3 Soldering temperature	$T_{sol}$	260	$^\circ\text{C}$


\*1 Pulse width  $\leq 10\mu\text{s}$ , Duty ratio = 0.02

\*2 RH = 40 ~ 60%, AC for 1 minute


\*3 For 10 seconds




Test Circuit for  $I_{OL1}$

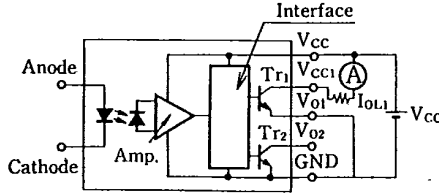

Test Circuit for  $I_{OL2}$

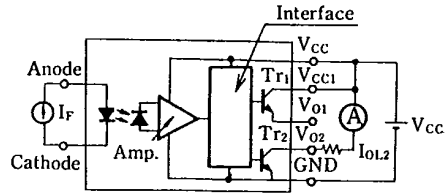

Test Circuit for Response Time

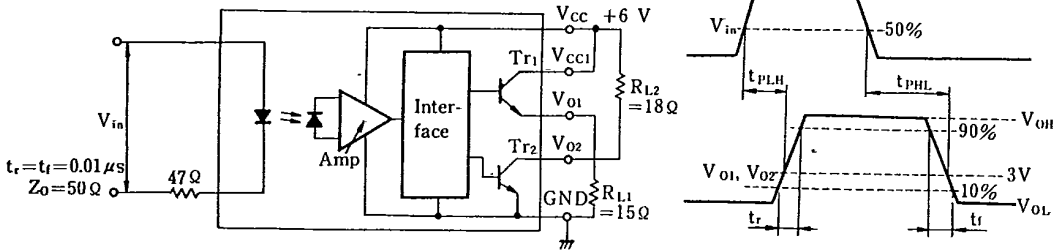

6

Fig. 1 Forward Current vs. Ambient Temperature



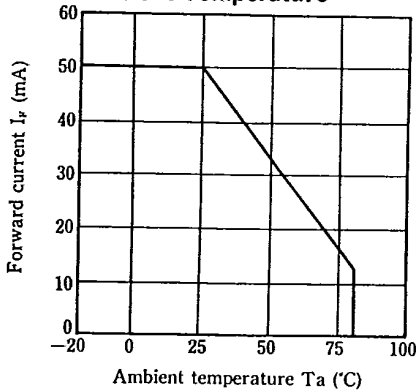



Fig. 2 Total Power Dissipation vs. Ambient Temperature

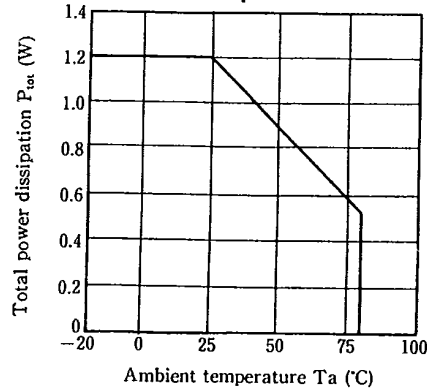


**Fig. 3 Forward Current vs. Forward Voltage**

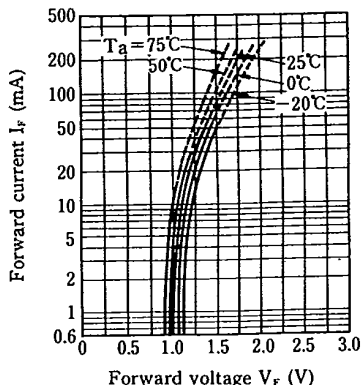


**Fig. 4 Relative Threshold Input Current vs. Supply Voltage**

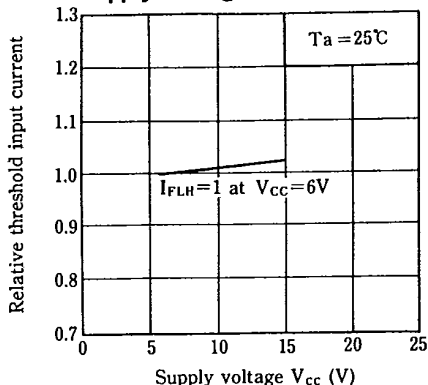


**Fig. 5 Relative Threshold Input Current vs. Ambient Temperature**

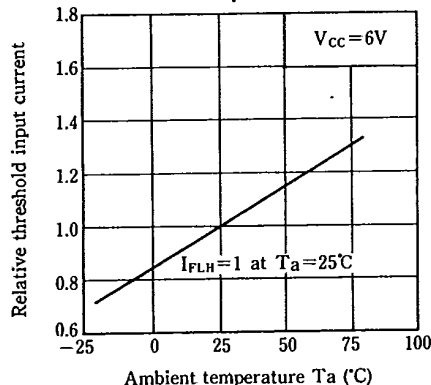


**Fig. 6 Output Voltage vs. Output Current ( $T_{r1}$ )**

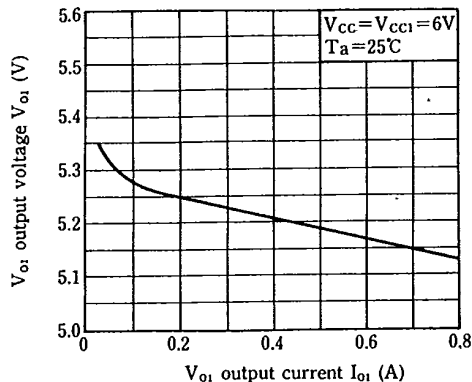

**Fig. 7 Output Voltage vs. Output Current ( $T_{r2}$ )**

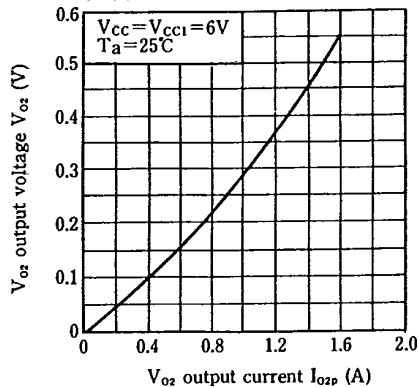


**Fig. 8 Output Voltage vs. Ambient Temperature ( $T_{r1}$ )**

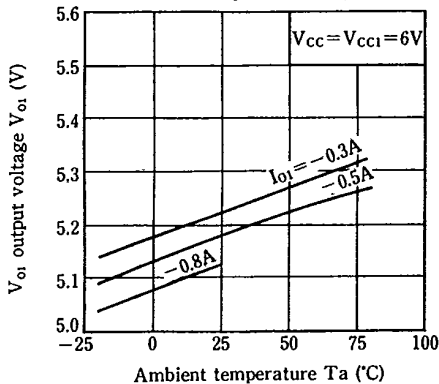


T-41-83


**Fig. 9 Output Voltage vs. Ambient Temperature ( $T_a$ )**

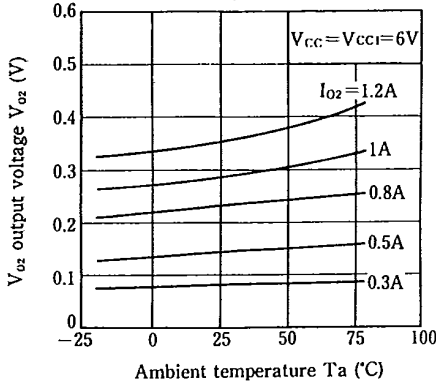


**Fig. 10 Supply Current vs. Supply Voltage**

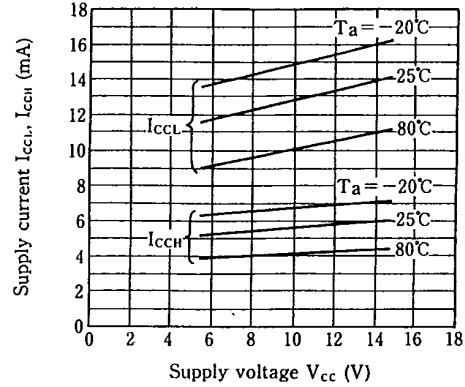

**Fig. 11 Propagation Time vs. Forward Current**

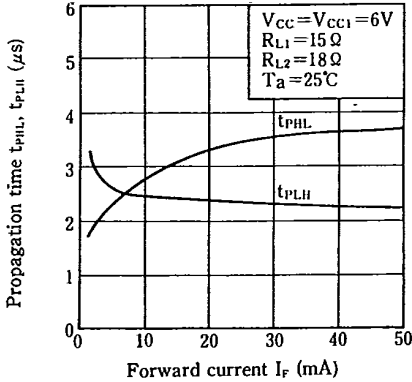

**Fig. 12 Propagation Time vs. Ambient Temperature**

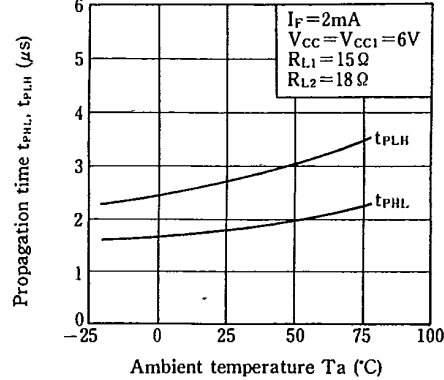

6

**Application Circuit Example**

