

PQ1Mxx5M2SP Series

Low Power-Loss Voltage Regulator

Large Output Current, Compact Surface Mount Type Low Power-Loss Voltage Regulators

Features

- (1) Compact surface mount package(4.5 × 4.3 × 1.5 mm)
- (2) Output current : MAX. 500 mA
- (3) Power dissipation : MAX. 900 mW
- (4) Low power-loss
(Dropout voltage: MAX. 0.7 V at I_o=500 mA)
- (5) High ripple rejection (TYP.65 dB)
- (6) Built-in ON/OFF control function
- (7) Built-in overcurrent, overheat protection functions
- (8) Use of ceramic capacitor is possible as output smooth capacitor

Applications

- (1) CD-ROM drives
- (2) DVD-ROM drives
- (3) Digital Still Cameras

Absolute Maximum Ratings


(Ta=25°C)

Parameter	Symbol	Ratings	Unit
*1 Input voltage	V _{in}	9	V
*1 ON/OFF control terminal voltage	V _c	9	V
Output current	I _o	500	mA
*2 Power dissipation	P _d	900	mW
*3 Junction temperature	T _j	150	°C
Operating temperature	T _{opr}	-30 to +80	°C
Storage temperature	T _{stg}	-55 to +150	°C
Soldering temperature	T _{sol}	270(For 10s)	°C

- *1 All are open except GND and applicable terminals.
- *2 At surface-mounted condition
- *3 Overheat protection may operate at 125 ≤ T_j ≤ 150°C.

Outline Dimensions

(Unit: mm)

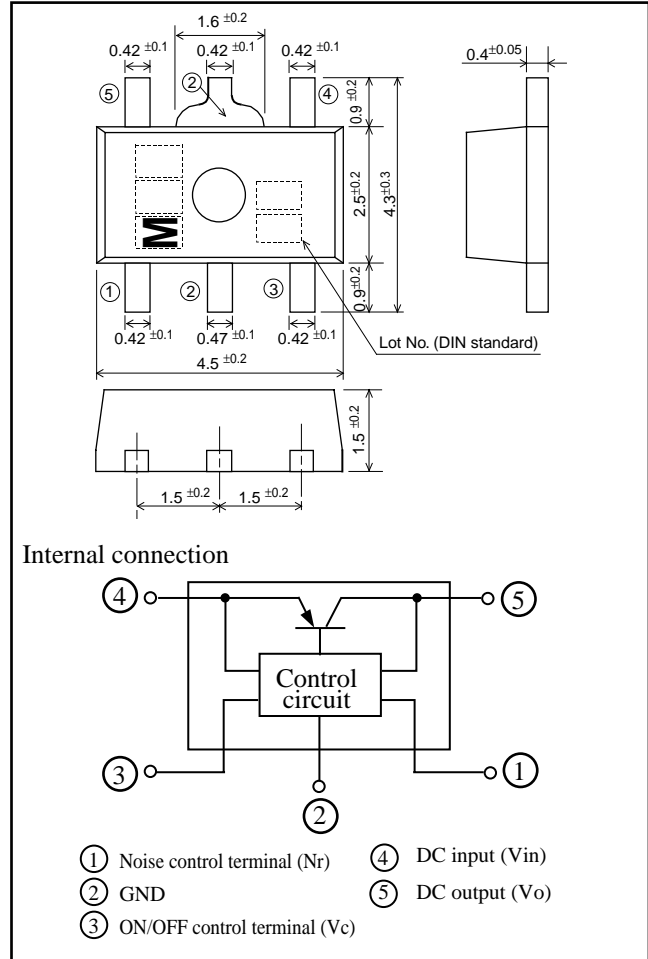

(Notice)

- In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
- Specifications are subject to change without notice for improvement.
- (Internet)
- Data for Sharp's optoelectronic/power devices is provided on internet. (Address <http://sharp-world.com/ecg/>)

Electrical Characteristics

(Unless otherwise specified, $V_{in}=V_o(TYP.)+1.0V$, $V_c=1.8V$, $I_o=30mA$, $T_a=25^\circ C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	V_o	-	Refer to the table below.			V
Load regulation	RegL	$I_o=5mA$ to $500mA$	-	60	200	mV
Line regulation	RegI	$V_{in}=V_o(TYP.)+1V$ to $V_o(TYP.)+6V(MAX.9V)$	-	3.0	20	mV
Temperature coefficient of output voltage	T_cV_o	$I_o=10mA$, $T_j=-25$ to $+75^\circ C$	-	0.1	-	mV/ $^\circ C$
Ripple rejection *4	RR	-	-	65	-	dB
Output noise voltage *4	$V_{no}(rms)$	$10Hz < f < 100kHz$ $I_o=30mA$, $C_n=0.1\mu F$	-	40	-	μV
Dropout voltage	V_{i-o}	$I_o=500mA$ *5	-	0.4	0.7	V
*6 ON-state voltage for control	$V_c(on)$	-	1.8	-	-	V
ON-state current for control	$I_c(on)$	$V_c=1.8V$	-	20	70	μA
OFF-state voltage for control	$V_c(off)$	-	-	-	0.4	V
Quiescent current	I_q	$I_o=0mA$	-	0.6	1.5	mA
Output OFF-state dissipation current	I_{qs}	$V_c=0.2V$	-	-	1	μA

*4 Typical value at output voltage is 3.3 V type.

*5 Dropout voltage when output voltage lowers 0.1V from the voltage at $V_{in}=V_o+1V$.

*6 In case of opening control terminal ③, output voltage turns off.

Output Voltage Line-up

($V_{in}=V_o(TYP.)+1.0V$, $V_c=1.8V$, $I_o=30mA$, $T_a=25^\circ C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
*7 Output voltage	PQ1M255M2SP	-	2.440	2.5	2.560	V
	PQ1M335M2SP		3.234	3.3	3.366	
	PQ1M505M2SP		4.900	5.0	5.100	

*7 : It is available for every 0.1V (1.3V to 5V).

Fig.1 Test Circuit


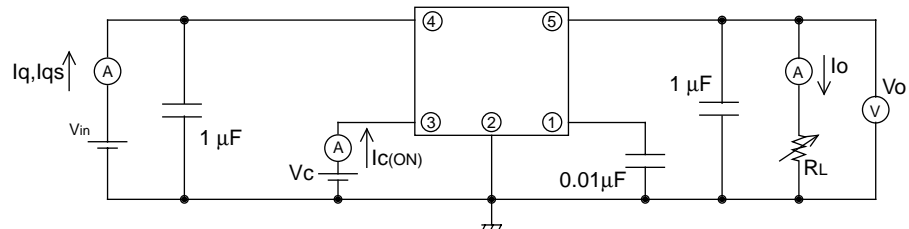


Fig.2 Test Circuit for Ripple Rejection

$f=400Hz$ (sine wave)
 $e_i(rms)=100mV$
 $V_{in}=V_o(TYP.)+1.0V$
 $V_c=1.8V$
 $I_o=30mA$
 $RR=20 \log(e_i(rms)/e_o(rms))$

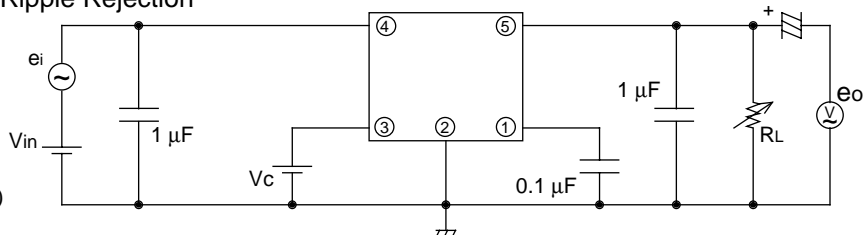

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.