


AMP HV-190 Receptacles Double Row, Right-Angle Mount

Side Entry, End Stackable
without Centre Loss



Material and Finish:

Housing—Polyester, glass filled, green UL 94 V-0 rated


Contact Material—Phosphor bronze, plated as follows:

Plating A

Contact Zone—0.8 µm gold over 1.27 µm nickel

Soldering Zone—2.5 µm tin over 1.27 µm nickel

Plating B—2.5 µm tin over 1.27 µm nickel

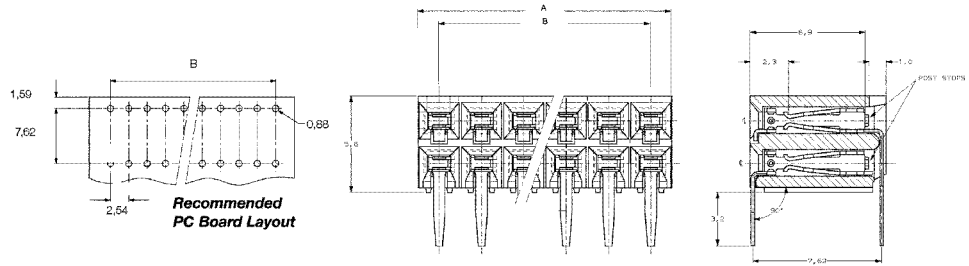

Technical Documents:

Product Specification
108-19072

No. of Positions	Dimensions		Plating / Part Number	
	A	B	Plating A	Plating B
2	5.08	2.54	216604-2	216603-2
3	7.62	5.08	216604-3	216603-3
4	10.16	7.62	216604-4	216603-4
5	12.70	10.16	216604-5	216603-5
6	15.24	12.70	216604-6	216603-6
7	17.78	15.24	216604-7	216603-7
8	20.32	17.78	216604-8	216603-8
9	22.86	20.32	216604-9	216603-9
10	25.40	22.86	1-216604-0	1-216603-0
11	27.94	25.40	1-216604-1	1-216603-1
12	30.48	27.94	1-216604-2	1-216603-2
13	33.02	30.48	1-216604-3	1-216603-3
14	35.56	33.02	1-216604-4	1-216603-4
15	38.10	35.56	1-216604-5	1-216603-5
16	40.64	38.10	1-216604-6	1-216603-6
17	43.18	40.64	1-216604-7	1-216603-7
18	45.72	43.18	1-216604-8	1-216603-8
19	48.26	45.72	1-216604-9	1-216603-9
20	50.80	48.26	2-216604-0	2-216603-0
30	76.20	73.66	3-216604-0	3-216603-0
40	101.60	99.06	4-216604-0	4-216603-0
50	127.00	124.46	5-216604-0	5-216603-0
60	152.40	149.86	6-216604-0	6-216603-0
65	165.10	162.56	6-216604-5	6-216603-5

Ordering Information: For intermediate number of positions, dash numbers should be combined properly