

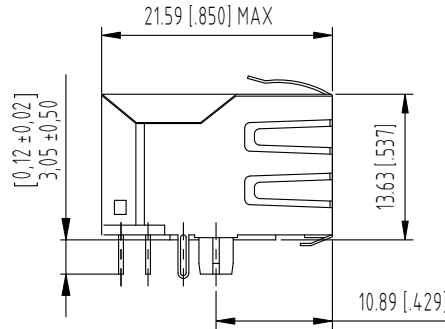
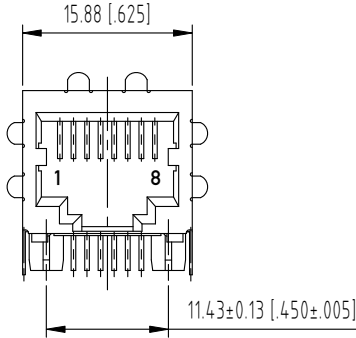



RECOMMENDED PANEL CUTOUT
EMPFOLHENER FRONTPLATTEN AUSSCHNITT



RECOMMENDED PCB LAYOUT (COMPONENT SIDE VIEW)
EMPFOLHENER FUER LEITERPLATTE (BESTUECKUNGSSEITE)
TOL ±0.05 [.002] UNLESS NOTED

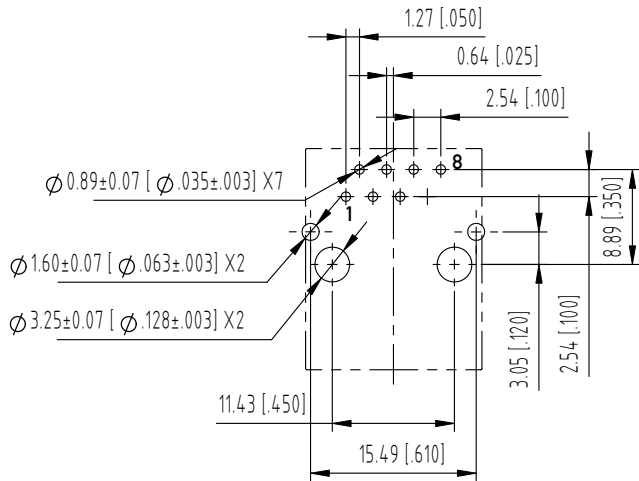

ELECTRICAL SCHEMATIC M3D01
ELEKTRISCHES DIAGRAM

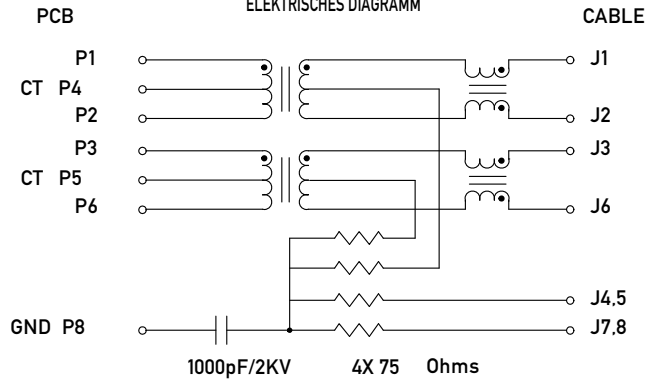

MAGNETICS SPECIFICATIONS @ 25°C

AUTO MDIX COMPATIBLE

URNS RATIO:

(P1-P2 : J1-J2) 1CT : 1±3%

(P3-P6 : J3-J6) 1CT : 1±3%

OCL(100 KHz, 0.1 Vrms, 8 mA)

(P1-P2 : P3-P6) 350µH MIN

DCR (P1-P2, P3-P6) 0.9 OHMS MAX

INSERTION LOSS:

0.1-100 MHz -1.1 dB MAX

RETURN LOSS:

0.5 - 30 MHz: -18 dB MIN

40 MHz: -15.5 dB MIN

50 MHz: -13.6 dB MIN

60 - 80 MHz -12 dB MIN

CROSSTALK:

1-100 MHz -40 dB TYP

CMR:

0.1 - 30 MHz -50 dB TYP

30 - 60 MHz -40 dB TYP

60 - 100 MHz -35 dB TYP

ISOLATION

1500 Vrms

NOTE 1: PANEL GROUND FLANGES BOTH SIDES AND TOP (GF5)

NOTE 2: SIDE GROUND TABS REAR OF PEG 3.05mm (R)

MATERIALS AND FINISH

HOUSING: GLASS FILLED POLYESTER UL 94 V-0 BLACK

SHIELDING: Cu ALLOY, PLATED WITH Ni

CONTACTS: PHOSPHOR BRONZE

CONTACT FINISH: Au, 0.8 µm (30 µin) OVER Ni

TERMINAL FINISH: Sn matte

MECHANICAL CHARACTERISTICS

DURABILITY: 1000 MATING CYCLES

OPERATING TEMPERATURE: 0°C TO 70°C

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16116 to be observed.

Information:		Tolerances		Scale	1:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		All Dimensions in mm		Designation	
Subject to modification without prior notice. Drawing will not be updated.				MOD JACK - MJIM 8C7T, 1X1, INTEGRATED MAGNETICS	
H	12.03.2008	www.ERNI.com		133723	1 (1/1)
Index	Date	Class		MAXMJ	