


HONEYWELL PART NUMBER
1SM1-T
PRODUCT CODE TWA0160
JG-80300

REV	DOCUMENT	CHANGED BY	CHECK
11	0034444	KSR 10OCT07	RJ

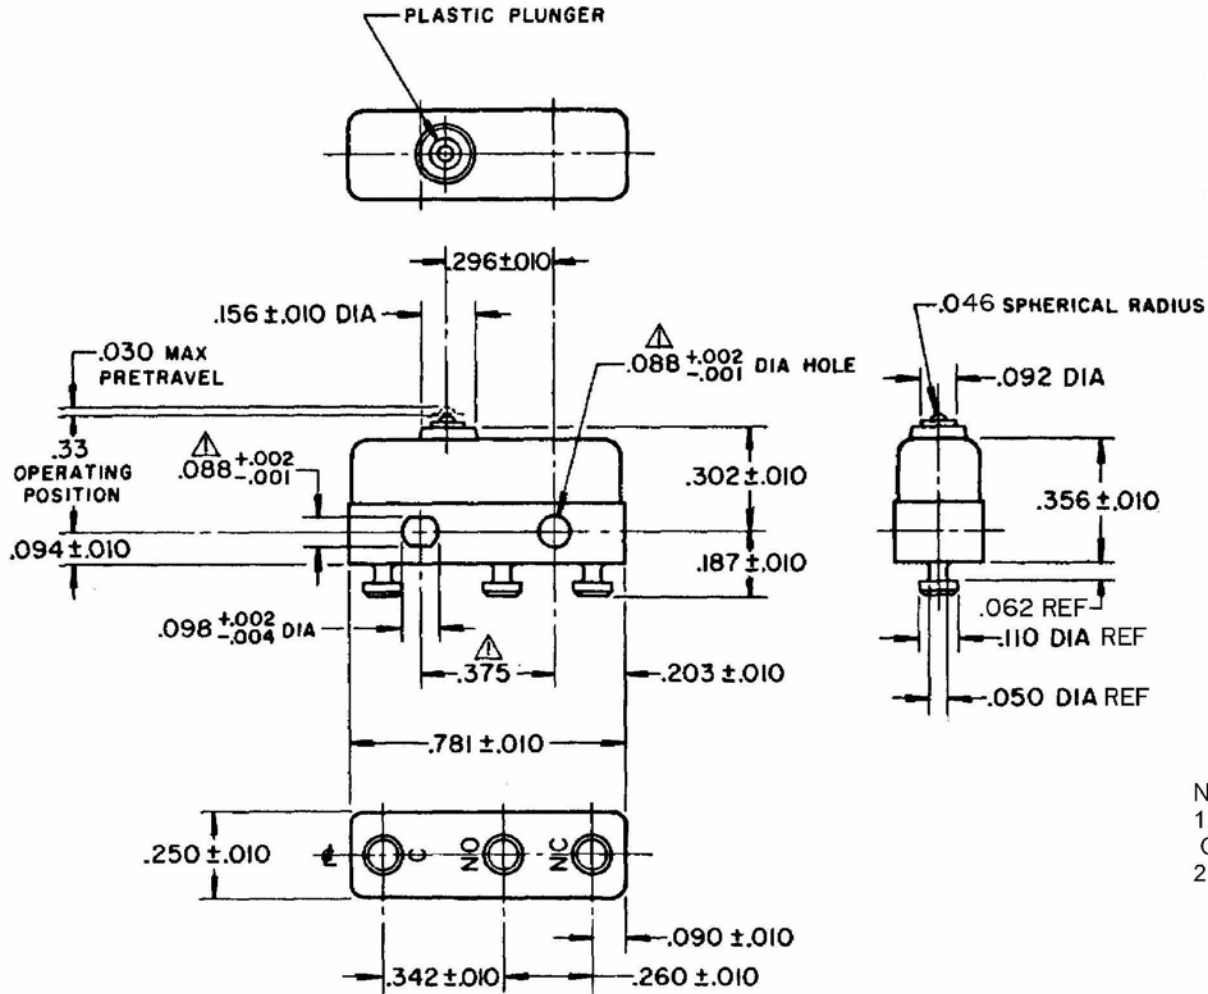

- NOTES:
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 + .002 CENTERS
 2. TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.	-
REPLACES	-

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE - - - - 3 - 5 OZ	CONTACT ARRANGEMENT SPDT
RELEASE FORCE - - - - 1 OZ MIN	30 VOLTS DC RATING
DIFFERENTIAL TRAVEL - - .004 MAX	SEA LEVEL 50,000 FT
OVERTRAVEL - - - - .005 MIN	INDUCTIVE 3 AMP 2.5 AMP
	RESISTIVE 5 AMP 5 AMP
	MAXIMUM INRUSH 24 AMP
	APPROVALS KEMA CE 5A, 250V ~ T85 1E4 UL CSA 5A, 250 VAC ~

DESIGN UNITS: INCH	NO PLACE .X ±
TOLERANCES UNLESS NOTED:	ONE PLACE .X ±
	TWO PLACE .XX ±
	THREE PLACE .XXX ±
	FOUR PLACE .XXXX ±
	ANGLES ±

DRAWN	KSR	10OCT07
CHECK	RJ	10OCT07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	1SM1-T	11
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1