


1N5400 THRU 1N5408

GENERAL PURPOSE PLASTIC RECTIFIER

Reverse Voltage - 50 to 1000 Volts Forward Current - 3.0 Amperes

DO-201AD

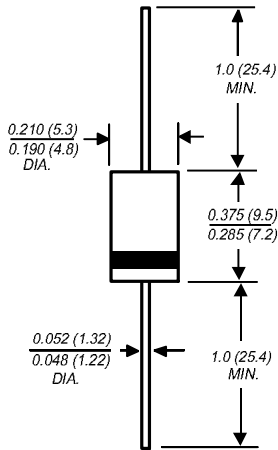

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High surge current capability
- ◆ Construction utilizes void-free molded plastic technique
- ◆ 3.0 Ampere operation at $T_L=105^\circ\text{C}$ with no thermal runaway
- ◆ Typical I_R less than $0.1\mu\text{A}$
- ◆ High temperature soldering guaranteed: $250^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: JEDEC DO-201AD molded plastic body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.04 ounce, 1.1 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| | SYMBOLS | 1N 5400 | 1N 5401 | 1N 5402 | 1N 5403 | 1N 5404 | 1N 5405 | 1N 5406 | 1N 5407 | 1N 5408 | UNITS |
|--|-----------------|---------------|---------|---------|---------|---------|---------|---------|---------|---------|---------------------------|
| *Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 300 | 400 | 500 | 600 | 800 | 1000 | Volts |
| *Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 210 | 280 | 350 | 420 | 560 | 700 | Volts |
| *Maximum DC blocking voltage to $T_A=150^\circ\text{C}$ | V_{DC} | 50 | 100 | 200 | 300 | 400 | 500 | 600 | 800 | 1000 | Volts |
| *Maximum average forward rectified current 0.5" (12.5mm) lead length at $T_L=105^\circ\text{C}$ | $I_{(AV)}$ | 3.0 | | | | | | | | | Amps |
| *Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at $T_L=105^\circ\text{C}$ | I_{FSM} | 200.0 | | | | | | | | | Amps |
| *Maximum instantaneous forward voltage at 3.0A | V_F | 1.2 | | | | | | | | | Volts |
| *Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=150^\circ\text{C}$ | I_R | 10.0 500.0 | | | | | | | | | μA |
| *Maximum full load reverse current full cycle average, 0.5" (12.5mm) lead length at $T_L=105^\circ\text{C}$ | $I_{R(AV)}$ | 500.0 | | | | | | | | | μA |
| Typical junction capacitance (NOTE 1) | C_J | 30.0 | | | | | | | | | pF |
| *Typical thermal resistance (NOTE 2) | $R_{\theta JA}$ | 20.0 | | | | | | | | | $^\circ\text{C}/\text{W}$ |
| Maximum DC blocking voltage temperature | T_A | +150 | | | | | | | | | $^\circ\text{C}$ |
| *Operating junction temperature range | T_J | -50 to +170 | | | | | | | | | $^\circ\text{C}$ |
| *Storage temperature range | T_{STG} | -50 to +170 | | | | | | | | | $^\circ\text{C}$ |

NOTES:

- (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
 - (2) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted with 0.8 x 0.8" (20 x 20mm) copper heatsinks
- *JEDEC registered value

RATINGS AND CHARACTERISTIC CURVES 1N5400 THRU 1N5408

FIG. 1 - FORWARD CURRENT DERATING CURVE

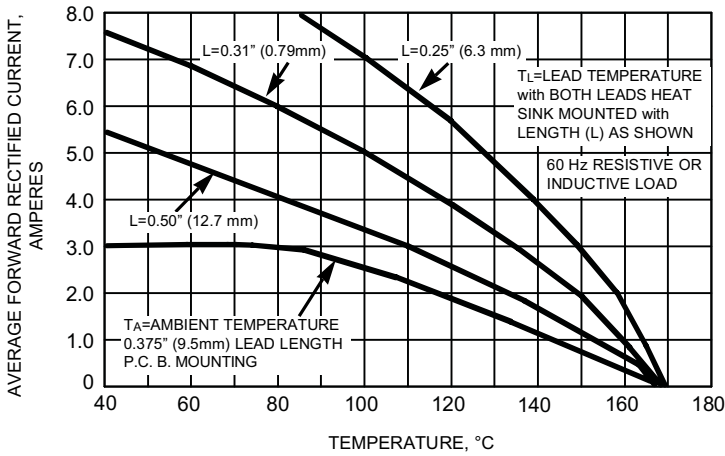


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

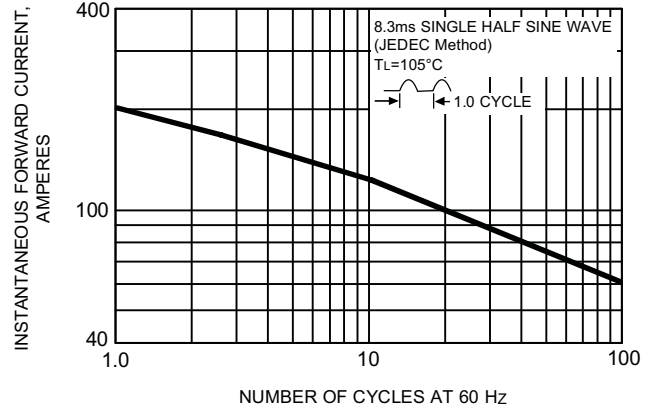


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

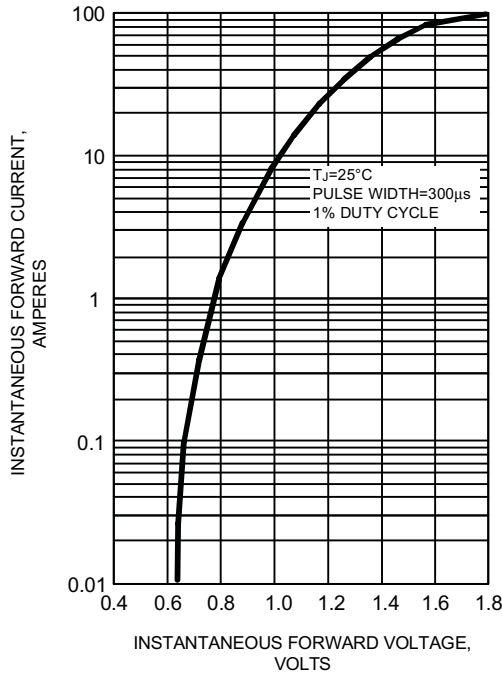


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

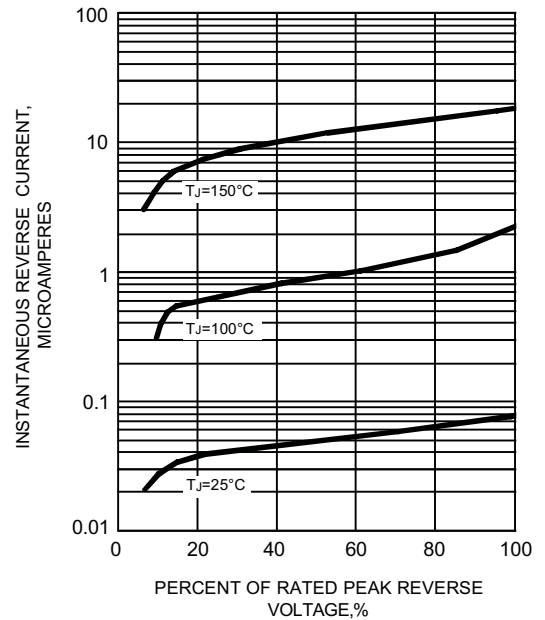


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

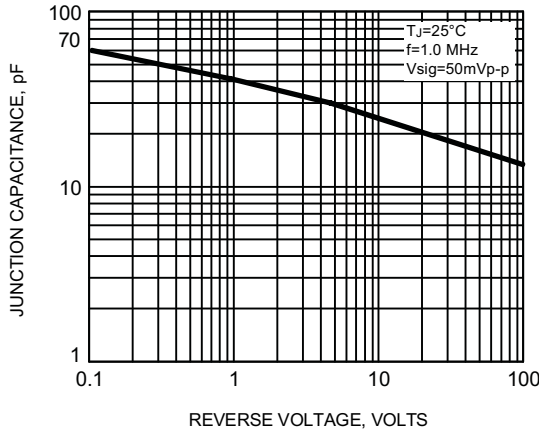


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

