

MITSUBISHI LSTTLs
M74LS107AP

DUAL J-K NEGATIVE EDGE-TRIGGERED FLIP FLOPS WITH RESET

DESCRIPTION

The M74LS107AP is a semiconductor integrated circuit containing 2 J-K negative edge-triggered flip-flop circuits with discrete terminals for clock input \bar{T} , J and K inputs and direct reset input \bar{R}_D .

FEATURES

- Negative edge-triggering
- Independent input/output terminals for each flip-flop.
- Direct reset input
- Q and \bar{Q} outputs
- Wide operating temperature range ($T_a = -20 \sim +75^\circ C$)


APPLICATION

General purpose, for use in industrial and consumer equipment.

FUNCTIONAL DESCRIPTION

J and K signals are read when \bar{T} is "H". When \bar{T} changes from "H" to "L", Q and \bar{Q} transit with the J and K signals to the states described in the function table. By setting \bar{R}_D in "L" state, Q and \bar{Q} become "L" and "H", respectively, irrespective of the states of the other input signals. For use as a J-K flip-flop, keep \bar{R}_D in the "H" state. M74LS107AP is the same as M74LS73AP except for pin configuration.

PIN CONFIGURATION (TOP VIEW)

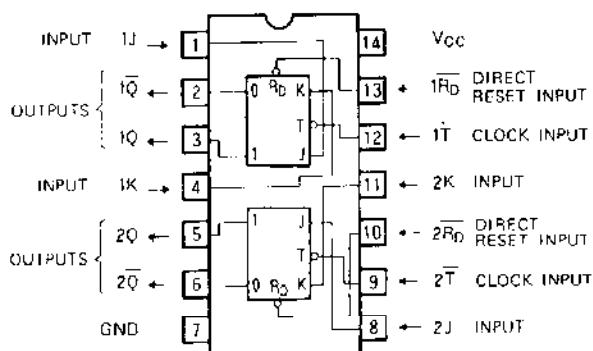

Outline 14P4

FUNCTION TABLE (Note 1)

T	\bar{R}_D	J	K	Q	\bar{Q}
X	L	X	X	L	H
*	H	H	H		Toggle
+	H	L	H	L	H
↓	H	H	L	H	L
↓	H	L	L	Q^0	\bar{Q}^0
H	H	X	X	Q^0	\bar{Q}^0

Note 1: ↓ : transition from high to low-level


X : irrelevant

Q^0 : level of Q before the indicated steady-state input conditions were established.

\bar{Q}^0 : level of \bar{Q} before the indicated steady-state input conditions were established.

Toggle : complement of previous state with ↓ transition of outputs

BLOCK DIAGRAM (EACH FLIP-FLOP)

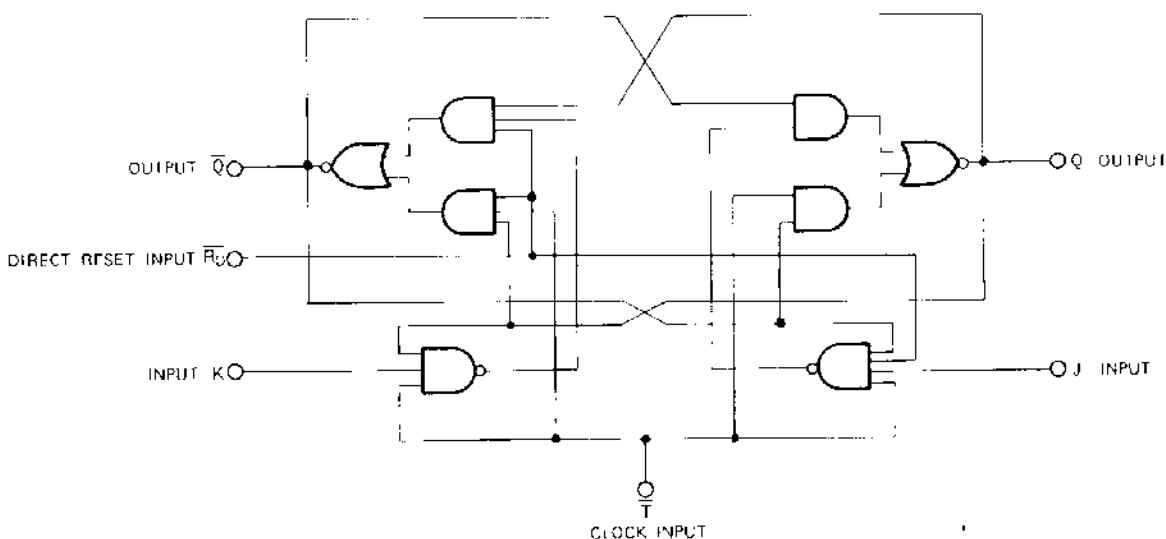

DUAL J-K NEGATIVE EDGE-TRIGGERED FLIP FLOPS WITH RESET

ABSOLUTE MAXIMUM RATINGS (Ta = 20 + 75°C, unless otherwise noted)

Symbol	Parameter	Conditions	Limits	Unit
V _{CC}	Supply voltage		0.5 ~ 7	V
V _I	Input voltage		0.5 ~ 15	V
V _O	Output voltage	High-level state	0.5 ~ V _{CC}	V
T _{OPR}	Operating free-air ambient temperature range		-20 ~ 75	°C
T _{STG}	Storage temperature range		-65 ~ 150	°C

RECOMMENDED OPERATING CONDITIONS (1a) 20 - 75°C., unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min	Typ	Max	
V _{CC}	Supply voltage	4.75	5	5.25	V
I _{OH}	High-level output current	V _{OH} >2.7V	0	-400	mA
I _{OL}	Low-level output current	V _{OL} >0.4V	0	-4	mA
		V _{OL} >0.5V	0	-8	mA

ELECTRICAL CHARACTERISTICS ($T_a = 20 \pm 175^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Test conditions			Limits		Unit
		Min	Typ*	Max	Min	Max	
V _{IH}	High-level input voltage			2			V
V _{IL}	Low-level input voltage					0.8	V
V _{IC}	Input clamp voltage	V _{CC} = 4.75V, I _O = 18mA				1.5	V
V _{OH}	High-level output voltage	V _{CC} = 4.75V, V _I = 0.8V V _O = 2V, R _{OH} = 400 μ A		2.7	3.4		V
V _{OL}	Low-level output current	V _{CC} = 4.75V	I _O = 4mA		0.25	0.4	V
		V = 0.8V, V _O = 2V	I _O = 8mA		0.35	0.5	V
I _{II}	High-level input current	J, K				20	
		R _D				60	
		T				80	μ A
		J, K				0.1	
		R _D				0.3	mA
		T				0.4	
I _{III}	Low-level input current	J, K				-0.4	
		R _D , T				0.8	mA
I _{OS}	Short-circuit output current (Note 2)	V _{CC} = 5.25V, V _O = 0V		-20	100		mA
I _{CC}	Supply current	V _{CC} = 5.25V (Note 3)		4	6		mA

* : All typical values are at $V_{CC} = 5V$, $T_A = 25^\circ C$.

Note 2: All measurements should be done quickly, and not more than one output should be shorted at a time.


Note 3: T_{in} is measured with Q and \bar{Q} outputs high in turn. At the time of measurement, \bar{T}_{in} output is grounded.

SWITCHING CHARACTERISTICS ($V_{DD} = 5V$, $T_A = 25^\circ C$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
f_{max}	Maximum clock frequency		30	45		MHz
t_{PLH}	Low-to-high-level, high-to-low-level output propagation time, from input \bar{T} to output Q, \bar{Q}			8	20	ns
t_{PHL}	Low-to-high-level, high-to-low-level output propagation time, from input T to output Q, \bar{Q}	$C_L = 15\text{pF}$ (Note 4)		6	20	ns
t_{PLH}	Low-to-high-level, high-to-low-level output propagation time, from input \bar{R}_D to output Q, \bar{Q}			10	20	ns
t_{PHL}	Low-to-high-level, high-to-low-level output propagation time, from input R_D to output Q, \bar{Q}			7	20	ns

DUAL J-K NEGATIVE EDGE-TRIGGERED FLIP FLOPS WITH RESET

Note 4: Measurement circuit




- (1) The pulse generator (PG) has the following characteristics:
 $PRR = 1\text{MHz}$, $t_r = 6\text{ns}$, $t_f = 6\text{ns}$; $t_w = 500\text{ns}$,
 $V_{D} = 3\text{Vp.p.}$, $Z_0 = 50\Omega$
- (2) C_L includes probe and jig capacitance.

TIMING REQUIREMENTS ($V_{CC} = 5\text{V}$, $T_a = 25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
$t_w(\bar{T})$	Clock input \bar{T} high pulse width		20	12		ns
$t_w(R_D)$	Direct reset input R_D pulse width		25	4		ns
t_r	Clock rise time			650	100	ns
t_f	Clock pulse fall time			900	100	ns
$t_{SU(H)}$	Setup time high J, K to \bar{T}		20	9		ns
$t_{SU(L)}$	Setup time low J, K to \bar{T}		20	10		ns
$t_h(H)$	Hold time high J, K to \bar{T}		0	-8		ns
$t_h(L)$	Hold time low J, K to \bar{T}		0	-5		ns



TIMING DIAGRAM (Reference level = 1.3V)

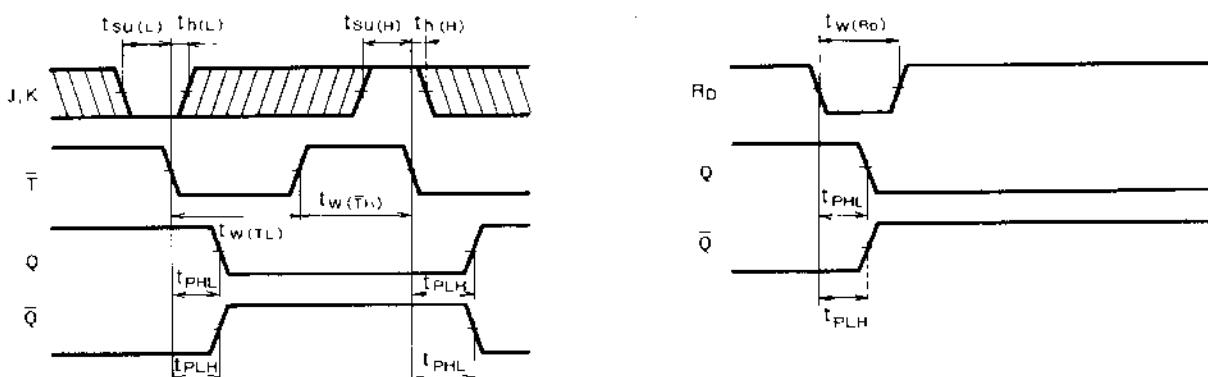

Note 5. The shaded areas indicate when the input is permitted to change for predictable output performance.

APPLICATION EXAMPLE

2bit shift register

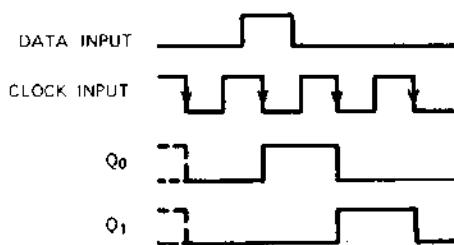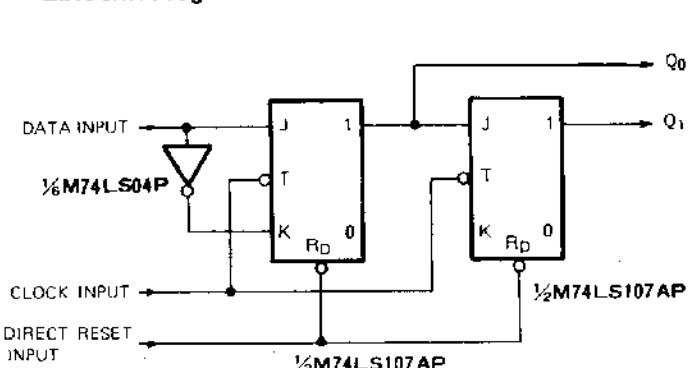

Note 6: Output switching characteristics may not satisfy the ratings if the clock signal is applied without observing the set-up time.


MITSUBISHI LSTTL
PACKAGE OUTLINES

MITSUBISHI EDITION LOGIC D7E D 6249827 0013561 3

T-90-20


TYPE 14P4 14-PIN MOLDED PLASTIC DIL

Dimension in mm

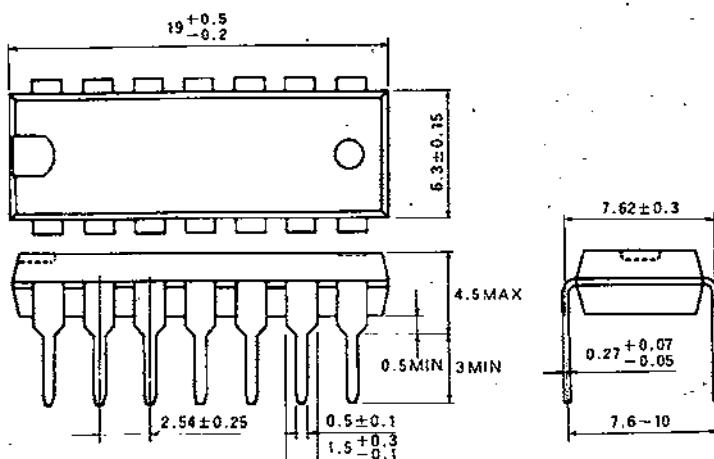

TYPE 16P4 16-PIN MOLDED PLASTIC DIL

Dimension in mm

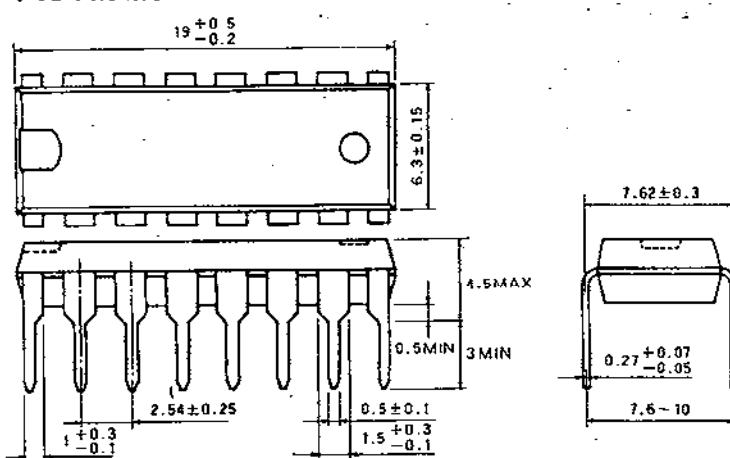

TYPE 20P4 20-PIN MOLDED PLASTIC DIL

Dimension in mm

