

Advance Information

72-Segment / 128-Segment LCD Drivers CMOS

The MC14LC5003A/5004A are 128-segment, multiplexed-by-four LCD Drivers. The MC14LC5002A is the same as MC14LC5003A except for 72 segments. The three devices are functionally the same except for their data input protocols. The MC14LC5002A/5003A use a serial interface data input protocol. The devices may be interfaced to the MC68HCXX product families using a minimal amount of software (see example). The MC14LC5004A has a IIC interface and has essentially the same protocol, except that the device sends an acknowledge bit back to the transmitter after each eight-bit byte is received.


The MC14LC5002A/5003A/5004A drive the liquid crystal displays in a multiplexed-by-four configuration. The devices accept data from a microprocessor or other serial data source to drive one segment per bit. The chip does not have a decoder, allowing for the flexibility of formatting the segment data externally.

Devices are independently addressable via a two-wire (or three-wire) communication link which can be common with other peripheral devices.

The MC14LC5003A/5004A are low cost version of MC145003 and MC145004 without cascading function.

- Drives 72 Segments Per MC14LC5002A's Package
- Drives 128 Segments Per MC14LC5003A/5004A's Package
- May Be Used with the Following LCDs: Segmented Alphanumeric, Bar Graph, Dot Matrix, Custom
- Quiescent Supply Current: 30 μ A @ 2.7 V V_{DD}
- Operating Voltage Range: 2.7 to 5.5 V
- Operating Temperature Range: -40 to 85°C
- Separate Access to LCD Drive Section's Supply Voltage to Allow for Temperature Compensation
- See Application Notes AN1066 and AN442

MC14LC5002A
MC14LC5003A
MC14LC5004A




QFP
FU SUFFIX
CASE 848B
TQFP
FB SUFFIX
CASE 873A


ORDERING INFORMATION

| | |
|---------------|----------|
| MC14LC5002AFB | TQFP |
| MC14LC5003AFU | QFP |
| MC14LC5004AFU | QFP |
| MCC14LC5003A | BARE DIE |
| MCC14LC5004A | BARE DIE |


MC14LC5002A BLOCK DIAGRAM

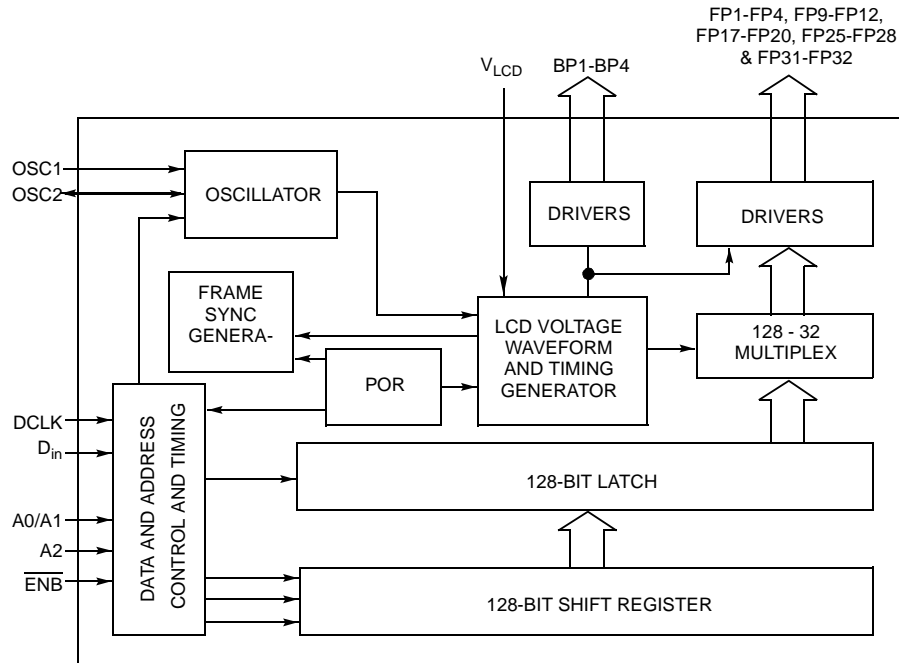


MC14LC5002A PIN ASSIGNMENT

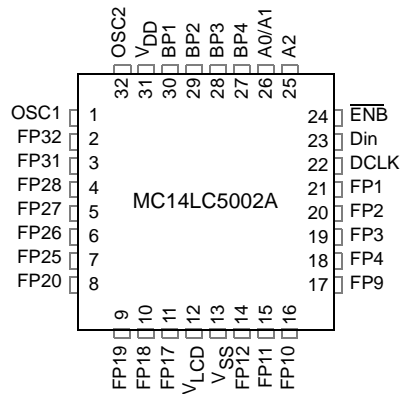

MC14LC5003A/MC14LC5004A BLOCK DIAGRAM

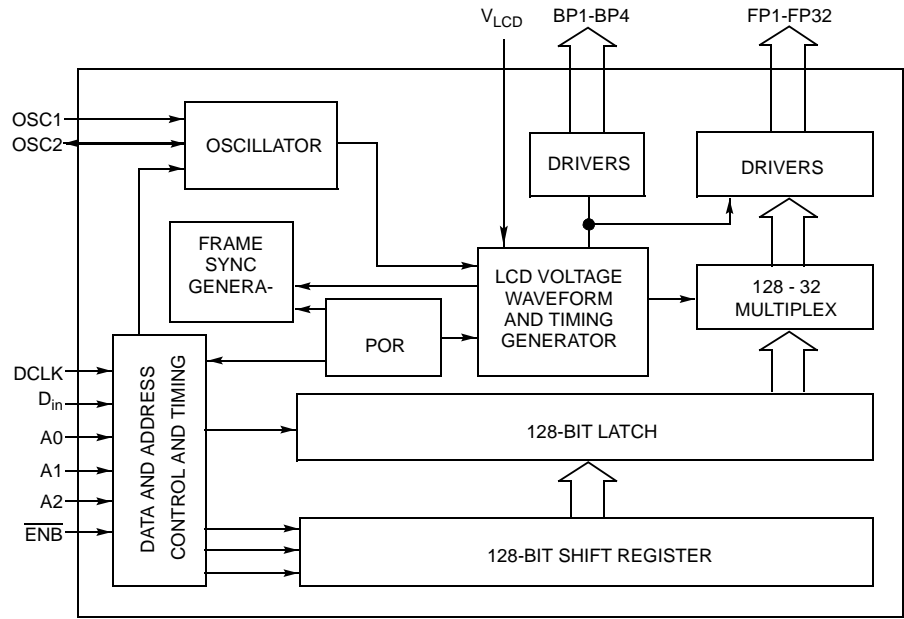

MC14LC5003A/MC14LC5004A PIN ASSIGNMENT

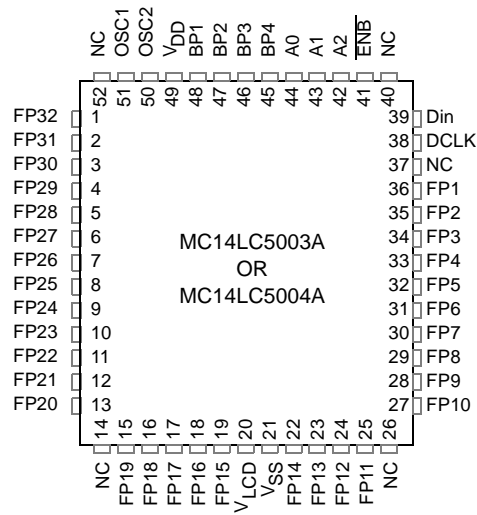

NC=NO CONNECTION

ABSOLUTE MAXIMUM RATINGS (Voltages Referenced to V_{SS})

| Symbol | Parameter | Value | Unit |
|---------------|--|-------------------------|------|
| V_{DD} | DC Supply Voltage | - 0.5 to + 6.5 | V |
| V_{in} | Input Voltage, D_{in} , and Data Clock | - 0.5 to + 15 | V |
| $V_{in\ osc}$ | Input Voltage, OSC_{in} of Master | - 0.5 to $V_{DD} + 0.5$ | V |
| I_{in} | DC Input Current, per Pin | ± 10 | mA |
| T_A | Operating Temperature Range | - 40 to + 85 | °C |
| T_{stg} | Storage Temperature Range | - 65 to + 150 | °C |

* Maximum Ratings are those values beyond which damage to the device may occur. Functional operation should be restricted to the limits in the Electrical Characteristics tables or Pin Descriptions section.

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. This device may be light sensitive. Caution should be taken to avoid exposure of this device to any light source during normal operation. This device is not radiation protected.

ELECTRICAL CHARACTERISTICS (Voltages Referenced to V_{SS} , $T_A = 25^\circ\text{C}$)

| Characteristic | Symbol | V_{DD} V | V_{LCD} V | Min | Typical | Max | Unit |
|--|------------|---------------|----------------|------|---------|------|---------------|
| Output Drive Current — Frontplanes $V_O = 0.15\text{ V}$ $V_O = 2.65\text{ V}$ $V_O = 1.72\text{ V}$ $V_O = 1.08\text{ V}$ $V_O = 0.15\text{ V}$ $V_O = 5.35\text{ V}$ $V_O = 3.52\text{ V}$ $V_O = 1.98\text{ V}$ | I_{FH} | 5 | 2.7 | 260 | — | — | μA |
| | I_{FL} | 5 | 2.7 | 260 | — | — | |
| | I_{FH} | 5 | 2.7 | -240 | — | — | |
| | I_{FL} | 5 | 2.7 | -240 | — | — | |
| | I_{FH} | 5 | 2.7 | -40 | — | — | |
| | I_{FL} | 5 | 2.7 | — | — | -1.5 | |
| | I_{FH} | 5 | 2.7 | 40 | — | — | |
| | I_{FL} | 5 | 2.7 | — | — | 2 | |
| Supply Standby Currents (No Clock) $I_{DD} = \text{Standby @ } I_{out} = 0\ \mu\text{A}$ $I_{LCD} = \text{Standby @ } I_{out} = 0\ \mu\text{A}$ $I_{DD} = \text{Standby @ } I_{out} = 0\ \mu\text{A}$ $I_{LCD} = \text{Standby @ } I_{out} = 0\ \mu\text{A}$ | I_{DDs} | 2.7 | — | — | — | 30 | μA |
| | I_{LCDs} | — | 2.7 | — | — | TBD | |
| | I_{DDs} | 5.5 | — | — | — | 50 | |
| | I_{LCDs} | — | 5.5 | — | — | TBD | |
| | I_{DDQ} | 2.7 | — | — | 30 | — | |
| | I_{DDQ} | 2.7 | — | — | — | 70 | |
| | I_{DDQ} | 5.5 | — | — | 170 | — | |
| | I_{DDQ} | 5.5 | — | — | — | 400 | |
| Supply Currents ($f_{OSC} = 110\text{ kHz}$) $I_{DD} = \text{Quiescent @ } I_{out} = 0\ \mu\text{A}, \text{ no loading}$ $I_{DD} = \text{Quiescent @ loading} = 270\text{pF}$ $I_{DD} = \text{Quiescent @ } I_{out} = 0\ \mu\text{A}, \text{ no loading}$ $I_{DD} = \text{Quiescent @ loading} = 270\text{pF}$ $I_{LCD} = \text{Quiescent @ } I_{out} = 0\ \mu\text{A}, \text{ no loading}$ $I_{LCD} = \text{Quiescent @ } I_{out} = 0\ \mu\text{A}, \text{ no loading}$ | I_{DDQ} | — | 2.7 | — | — | 40 | μA |
| | I_{DDQ} | — | 5.5 | — | — | 70 | |
| | I_{LCDQ} | — | — | — | — | — | |
| | I_{LCDQ} | — | — | — | — | — | |
| | I_{DDQ} | — | — | — | — | — | |
| | I_{DDQ} | — | — | — | — | — | |
| | I_{LCDQ} | — | — | — | — | — | |
| | I_{LCDQ} | — | — | — | — | — | |
| Input Current | I_{in} | — | — | -0.1 | — | 0.1 | μA |
| Input Capacitance | C_{in} | — | — | — | — | 7.5 | pF |

(continued)

ELECTRICAL CHARACTERISTICS (Continued)

| Characteristic | Symbol | V _{DD} V | V _{LCD} V | Min | Typical | Max | Unit |
|---|-------------------------------|----------------------|-----------------------|------|---------|------|------|
| Frequencies | | | | | | | |
| OSC2 Frequency @ R1; R1 = 200 kΩ | f _{OSC2} | 5 | 5 | 100 | — | 150 | kHz |
| BP Frequency @ R1 | f _{BP} | 5 | 5 | 100 | — | 150 | Hz |
| OSC2 Frequency @ R2; R2 = 996 kΩ | f _{OSC2} | 5 | 5 | 23 | — | 33 | kHz |
| Average DC Offset Voltage (BP Relative to FP) | V _{OO} | 5 | 2.8 | -50 | — | +50 | mV |
| Input Voltage | | | | | | | |
| “0” Level | V _{IL} | 2.8 | 5 | — | — | 0.85 | V |
| | V _{IL} | 5.5 | 5 | — | — | 1.65 | |
| “1” Level | V _{IH} | 2.8 | 5 | 2 | — | — | |
| | V _{IH} | 5.5 | 5 | 3.85 | — | — | |
| Output Drive Current — Backplanes V _O = 2.65 V | I _{BH} * | 5 | 2.8 | -240 | — | — | μA |
| | I _{BL} | 5 | 2.8 | -240 | — | — | |
| V _O = 0.15 V | I _{BH} | 5 | 2.8 | 260 | — | — | |
| | I _{BL} | 5 | 2.8 | 260 | — | — | |
| V _O = 1.08V | I _{BH} | 5 | 2.8 | 40 | — | — | |
| | I _{BL} | 5 | 2.8 | — | — | 2 | |
| V _O = 1.72 V | I _{BH} | 5 | 2.8 | -40 | — | — | |
| | I _{BL} | 5 | 2.8 | — | — | -1 | |
| V _O = 5.35 V | I _{BH} | 5 | 5.5 | -520 | — | — | |
| | I _{BL} | 5 | 5.5 | -520 | — | — | |
| V _O = 0.15 V | I _{BH} | 5 | 5.5 | 600 | — | — | |
| | I _{BL} | 5 | 5.5 | 600 | — | — | |
| V _O = 1.98 V | I _{BH} | 5 | 5.5 | 55 | — | — | |
| | I _{BL} | 5 | 5.5 | — | — | 1 | |
| V _O = 3.52 V | I _{BH} | 5 | 5.5 | -35 | — | — | |
| | I _{BL} | 5 | 5.5 | — | — | -1 | |
| Pulse Width, Data Clock (Figure 1) | t _w | 5 | | 100 | — | — | ns |
| | | 3 | | 100 | — | — | |
| DCLK Rise/Fall Time (Figure 1) | t _r t _f | 5 | | — | — | 120 | μs |
| | | 3 | | — | — | 120 | |
| Setup Time, D _{in} to DCLK (Figure 2) | t _{su} | 5 | | 20 | — | — | ns |
| | | 3 | | 20 | — | — | |
| Hold Time, D _{in} to DCLK (Figure 2) | t _h | 5 | | 40 | — | — | ns |
| | | 3 | | 60 | — | — | |
| Hold Time for START condition (Figure 2) | t _{start} | 5 | | 100 | — | — | ns |
| | | 3 | | 100 | — | — | |
| Hold Time for STOP condition (Figure 2) | t _{stop} | 5 | | 100 | — | — | ns |
| | | 3 | | 100 | — | — | |
| DCLK Low to $\overline{\text{ENB}}$ High (Figure 3) | t _h | 5 | | 20 | — | — | ns |
| | | 3 | | 20 | — | — | |
| $\overline{\text{ENB}}$ High to DCLK High (Figure 3) | t _{rec} | 5 | | 20 | — | — | ns |
| | | 3 | | 20 | — | — | |
| $\overline{\text{ENB}}$ High Pulse Width (Figure 3) | t _w | 5 | | 100 | — | — | ns |
| | | 3 | | 100 | — | — | |
| $\overline{\text{ENB}}$ Low to DCLK High (Figure 3) | t _{su} | 5 | | 20 | — | — | ns |
| | | 3 | | 20 | — | — | |

NOTE: Timing for Figures 1, 2, and 3 are design estimates only.

* For a time (t = 4/OSC FREQ.) after the backplane waveform changes to a new voltage level, the circuit is maintained in the high-current state to allow the load capacitances to charge quickly. The circuit is then returned to the low-current state until the next voltage change.

SWITCHING WAVEFORMS

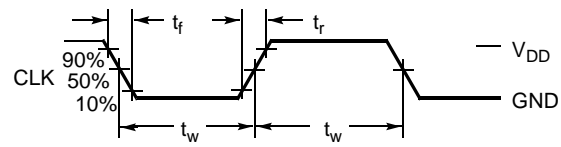


Figure 1.

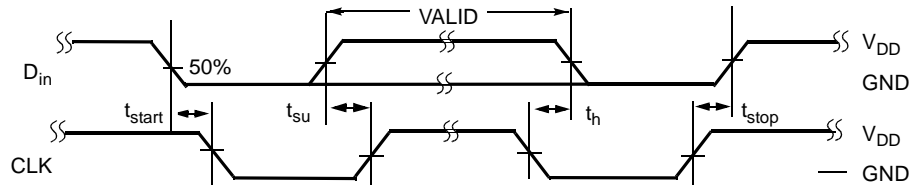


Figure 2.

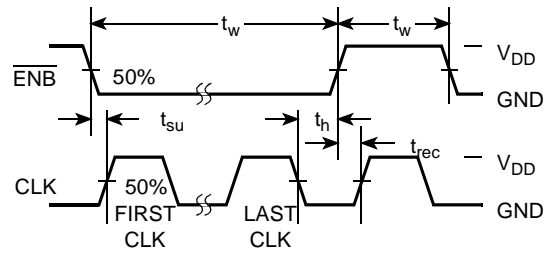


Figure 3.

FUNCTIONAL DESCRIPTION

The MC14LC5002A/5003A/5004A have essentially two sections which operate asynchronously from each other; the data input and storage section and the LCD drive section. The LCD drive and timing is derived from the oscillator, while the data input and storage is controlled by the Data In (D_{in}), Data Clock (DCLK), Address (A_0 , A_1 , A_2), and Enable (\overline{ENB}) pins.

Data is shifted serially into the 128-bit shift register and arranged into four consecutive blocks of 32 parallel data bits. A time-multiplex of the four backplane drivers is made (each backplane driver becoming active then inactive one after another) and, at the start of each backplane active period, the corresponding block of 32 bits is made available at the frontplane drivers. A high input to a plane driver turns the driver on, and a low input turns the driver off.

Figure 4 shows the sequence of backplanes. Figure 5 shows the possible configurations of the frontplanes relative to the backplanes. When a backplane driver is on, its output switches

from V_{LCD} to 0 V, and when it is off, it switches from $1/3 V_{LCD}$ to $2/3 V_{LCD}$. When a frontplane driver is on, its output switches from 0 V to V_{LCD} , and when it is off, it switches from $2/3 V_{LCD}$ to $1/3 V_{LCD}$.

The LCD drive and timing section provides the multiplex signals and backplane driver input signals and formats the frontplane and backplane waveforms.

The address pins are used to uniquely distinguish LCD driver from any other chips on the same bus and to define LCD driver as the "master" in the system. There must be one master in any system.

The enable pin may be used as a third control line in the communication bus. It may be used to define the moment when the data is latched. If not used, then the data is latched after 128 bits of data have been received.

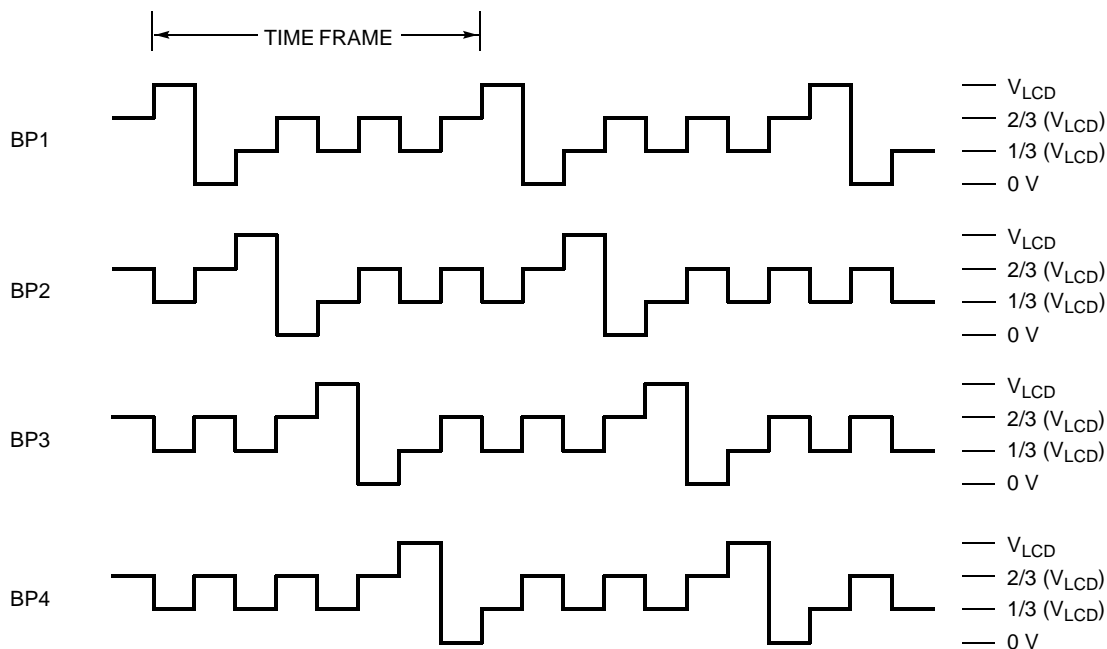


Figure 4. Backplane Sequence

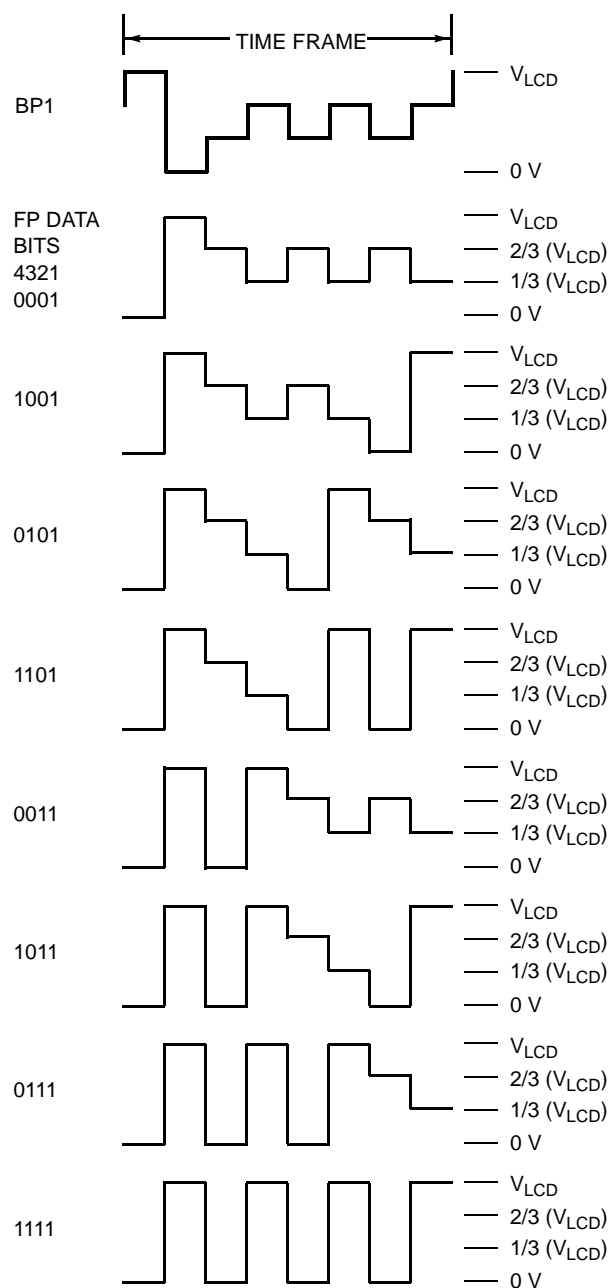
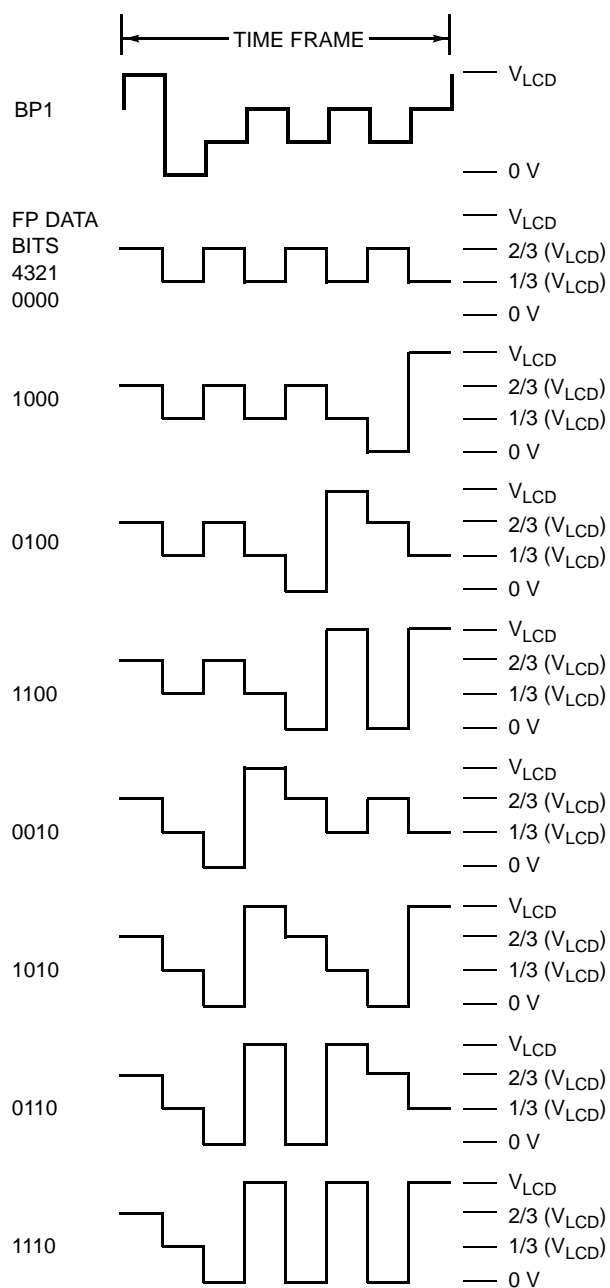


Figure 5. Frontplane Combinations

PIN DESCRIPTIONS

A0, A1, A2 for MC14LC5003A/5004A

A0/A1, A2 for MC14LC5002A

Address Inputs

The address pins must be tied to V_{DD} . This defines the normal operation mode.

CAUTION

The configuration A0, A1, A2 = 111 must be used. The configuration A0, A1, A2 = 000 is reserved for Motorola's use only. All three address pins should never be tied to 0 V simultaneously.

ENB

Enable Input

If the $\overline{\text{ENB}}$ pin is tied to V_{DD} , the MC14LC5002A/5003A/5004A will always latch the data after 128 bits have been received. The latched data is multiplexed and fed to the frontplane drivers for display. If external control of this latching function is required, then the $\overline{\text{ENB}}$ pin should be held low, followed by one high pulse on $\overline{\text{ENB}}$ when data display is required. (This may be useful in a system where MC14LC5002A/5003A/5004A is permanently addressed and only the last 128 bits of data sent are required to be latched for display). The pulse on the $\overline{\text{ENB}}$ pin must occur while DCLK is high.

DCLK, D_{in}

Data Clock and Data Input

Address input and data input controls. See **Data Input Protocol** sections for relevant option.

OSC1, OSC2

Oscillator Pins

To use the on-board oscillator, an external resistor should be connected between OSC1 and OSC2. Optionally, the OSC1 pin may be driven by an externally generated clock signal.

A resistor of 680 k Ω connected between OSC1 and OSC2 pins gives an oscillator frequency of about 30 kHz, giving approximately 30 Hz as seen at the LCD driver outputs. A resistor of 200 k Ω gives about 100 kHz, which results in 100 Hz at the driver outputs. LCD manufacturers recommend an LCD drive frequency of between 30 Hz and 100 Hz. See Figure 6.

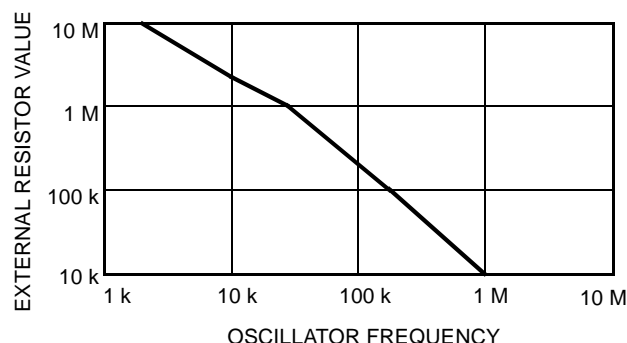


Figure 6. Oscillator Frequency vs. Load Resistance
(Approximate)

FP1-FP32

Frontplane Drivers

Frontplane driver outputs.

BP1-BP4

Backplane Drivers

Backplane driver outputs.

V_{LCD}

LCD Driver Supply

Power supply input for LCD drive outputs. May be used to supply a temperature-compensated voltage to the LCD drive section, which can be separate from the logic voltage supply, V_{DD} .

V_{DD}

Positive Power Supply

This pin supplies power to the main processor interface and logic portions of the device. The voltage range is 2.7 to 5.5 V with respect to the V_{SS} pin.

For optimum performance, V_{DD} should be bypassed to V_{SS} using a low inductance capacitor mounted very closely to these pins. Lead length on this capacitor should be minimized.

V_{SS}

Ground

Common ground.

DATA INPUT PROTOCOL

Two-wire communication bus DCLK, D_{in} ; three-wire communication bus DCLK, D_{in} , \overline{ENB} .

MC14LC5002A/5003A — SERIAL INTERFACE DEVICE (FIGURE 7)

MC14LC5002A/5003A — SERIAL INTERFACE DEVICE (FIGURE 7)

Before communication with an MC14LC5002A/5003A can begin, a start condition must be set up on the bus by the transmitter. To establish a start condition, the transmitter must pull the data line low for at least one clock-pulse time while the clock line is high. The "idle" state for the clock line and data line is the high state.

After the start condition has been established, an eight-bit address (01111110) should be sent by the transmitter. If the address sent corresponds to the address of the MC14LC5002A/5003A then on each successive clock pulse, the addressed device will accept a data bit.

If the \overline{ENB} pin is permanently high, then the addressed MC14LC5002A/5003A's internal counter latches the data to be displayed after 128 data bits have been received. Otherwise, the control of this latch function may be overridden by holding the \overline{ENB} line low until the new data is required to be displayed, then a high pulse should be sent on the \overline{ENB} line. The high pulse must be sent during DCLK high (clock idle).

To end communication with an MC14LC5002A/5003A, a stop condition should be set up on the bus (or another start condition may be set up if another communication is desired). To establish a stop condition, the transmitter must pull the data line high for at least one clock-pulse time while the clock line is high. Note that the communication channel to an addressed device may be left open after the 128 data bits have been sent by not setting up a stop or a start condition. In such a case, the 129th rising DCLK edge, which normally would be used to set up the stop or start condition, is ignored by the MC14LC5002A/5003A and data continues to be received on the 130th rising DCLK. The latch function continues to work as normal (i.e., data is be latched either after each block of 128 data bits has been received or under external control as required).

At any time during data transmission, the transfer may be interrupted with a stop condition. Data transmission may be resumed with a start condition and resending the address.

MC14LC5004A — IIC DEVICE (FIGURE 8)

Before communication with an MC14LC5004A can begin, a start condition must be set up on the bus by the controller. To establish a start condition, the controller must pull the data line low for at least one clock-pulse time while the clock line is high.

After the start condition has been established, an eight-bit address (01111110) should be sent by the controller followed by an extra clock pulse while the data line is left high. If the address bits sent correspond to the address of the LCD driver then the addressed LCD driver responds by sending an "acknowledge" bit back to the controller (i.e., the LCD driver pulls the data line low during the extra clock pulse supplied by the controller). Then the controller should continue to send data to the LCD driver in blocks of eight bits followed by an extra ninth clock pulse to allow the LCD driver to pull the data line D_{in} low as an acknowledgment.

If the \overline{ENB} pin is permanently high, then the addressed MC14LC5004A's internal counter latches the data to be displayed after 128 data bits have been received. Otherwise the control of this latch function may be overridden by holding the \overline{ENB} line low until the new data is required to be displayed, then a high pulse should be sent on the \overline{ENB} line. The high pulse must be sent during DCLK high (clock idle).

To end communication with an MC14LC5004A, a stop condition should be set up on the bus (or another start condition may be set up if another communication is desired). To establish a stop condition, the transmitter must pull the data line high for at least one clock-pulse time while the clock line is high. Note that the communication channel to an addressed device may be left open after the 128 data bits have been sent by not setting up a stop or a start condition. In such a case the rising DCLK edge which comes after all 128 data bits have been sent and after the last acknowledge-related clock pulse has been made is ignored; data continues to be received on the following DCLK high. The latch function continues to work as normal (i.e., data is latched either after each block of 128 data bits has been received or under external control as required).

At any time during data transmission, the transfer may be interrupted with a stop condition. Data transmission may be resumed with a start condition and resending the address.

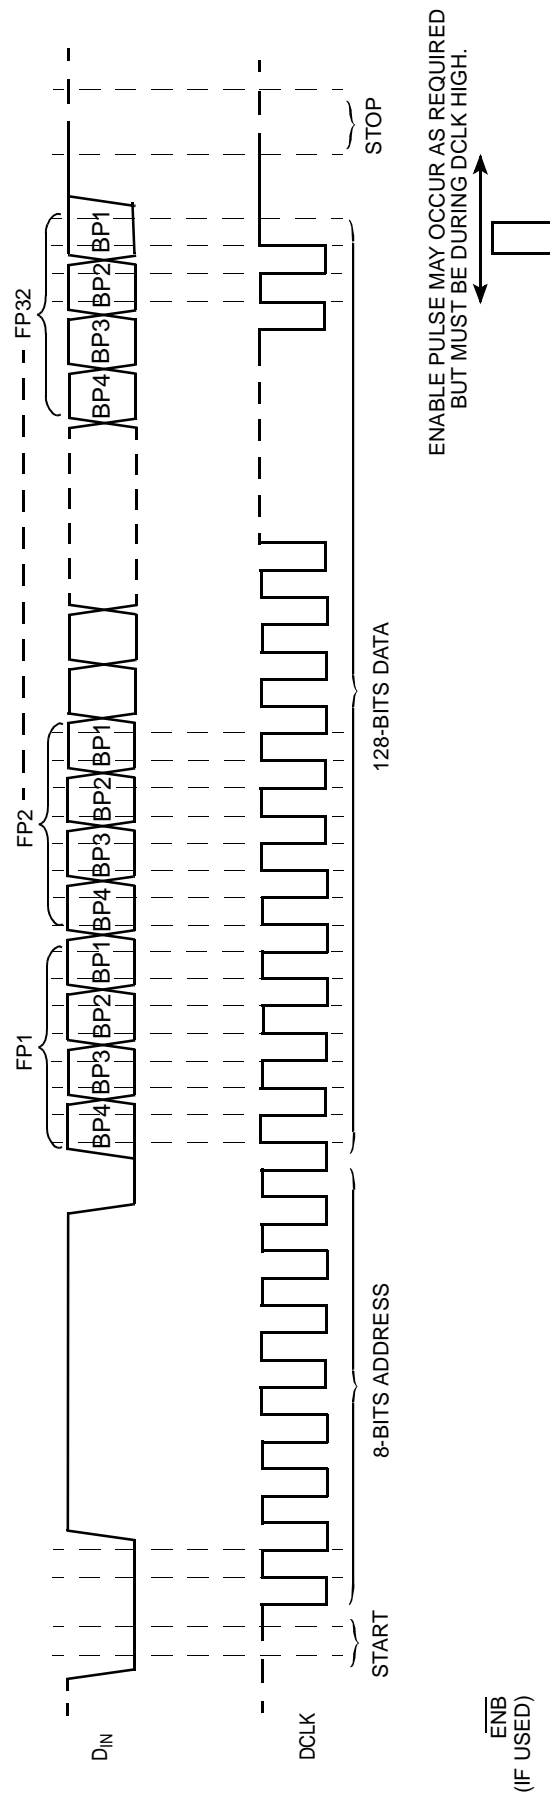


Figure 7a. Data Input—MC14LC5002A/5003A

Figure 7. MC14LC5002A/5003A(SERIAL INTERFACE DEVICE)

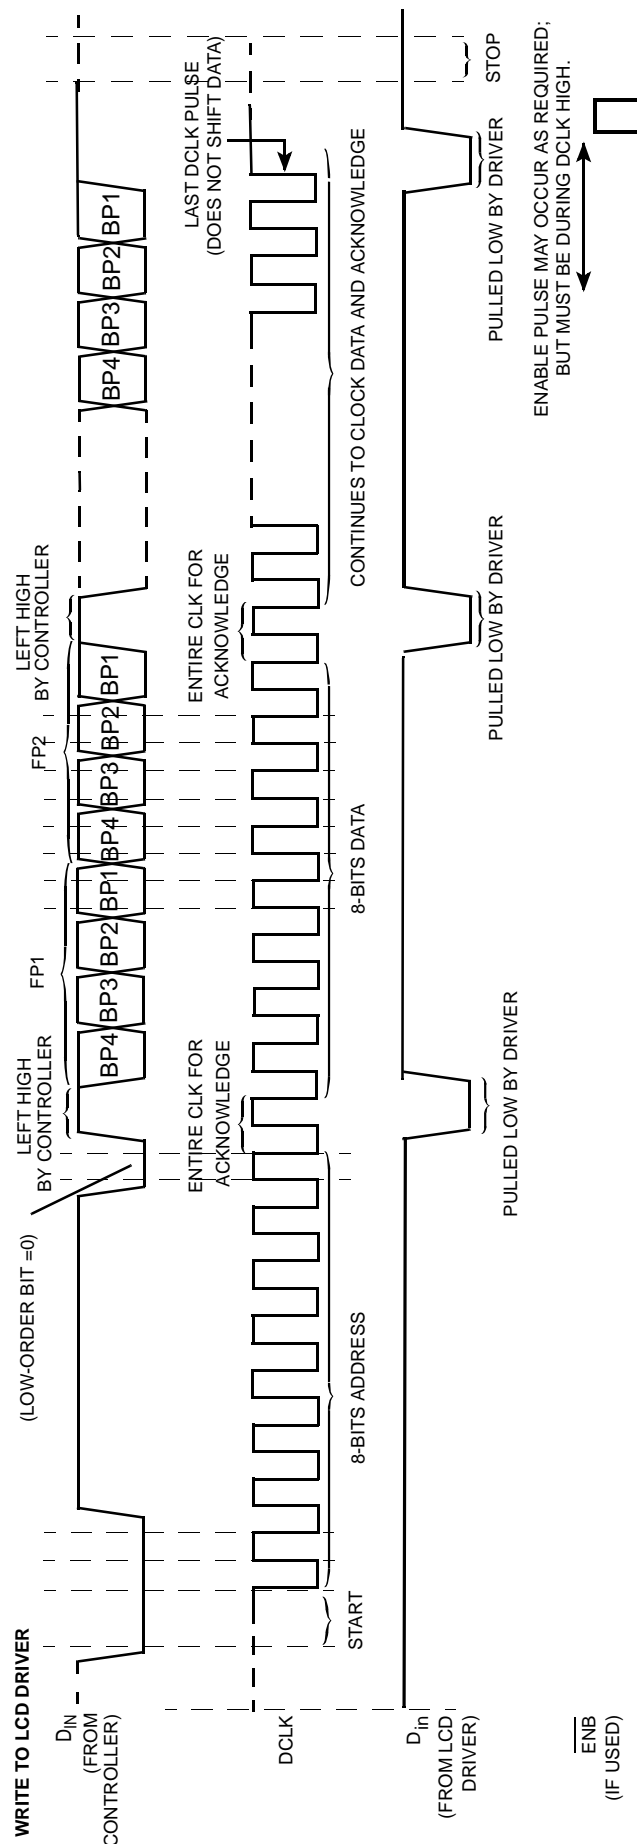


Figure 8 . Data Input MC14LC5004A (IIC Device)

APPLICATION INFORMATION

Figure 9 shows an interface example for serial data interface.
Example 1 contains the software to use HC05 with MC14LC5003A in serial data interface.

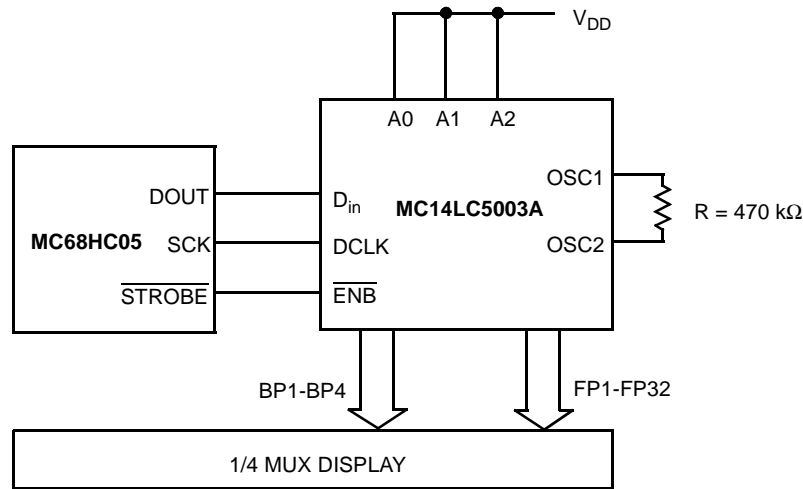


Figure 9. Serial Interface Example Between MC68HC05 and MC14LC5003A

```

PORTC EQU $02          PORTC
DDRC EQU $06           PORTDC
SEN EQU $07            ENABLE PIN, PC7
SCL EQU $06            CLOCK PIN, PC6
SDA EQU $05            DATA PIN, PC5
DOUT EQU $FF           OUTPUT DATA

ORG $0050

W1 RMB 1
COUNT RMB 1

ORG $1FFE              ADDRESS OF RESET VECTOR OF MC68HC805C4
FCB #$01               RESET VECTOR
FCB #$00

*** Main Program start at 0100 ***

ORG $0100
START LDA #DOUT         SET DATA LINE OUTPUT
      STA DDRC

AGAIN LDX #$00
      BSET SDA,PORTC     IDLE STATE
      BSET SCL,PORTC     CLOCK AND DATA ARE HIGH

READY BSET SEN,PORTC     EN=1
      LDA #$11           SET ADDRESS AND 8 CHARACTERS
      STA W1
      BCLR SDA,PORTC     START CONDITION, DATA LOW WHILE CLOCK HIGH

LBYTE CLC
      LDA #$08
      STA COUNT          8 BITS TO SHIFT
      LDA SEND,X          GET A BYTE
      INCX

```

| | | | |
|-------|------|-----------|---------------------------------|
| LBIT | BCLR | SCL,PORTC | CLOCK LOW |
| | ROLA | | |
| | BCC | DZERO | DATA BIT=0 ? |
| | BSET | SDA,PORTC | NO, BIT=1 AND DATA HIGH |
| | JMP | CLKHI | |
| DZERO | BCLR | SDA,PORTC | DATA LOW |
| CLKHI | BSET | SCL,PORTC | CLOCK HIGH |
| | DEC | COUNT | |
| | BNE | LBIT | |
| | DEC | W1 | |
| | BNE | LBYTE | LAST BYTE ? |
| STOP | BCLR | SCL,PORTC | |
| | BCLR | SDA,PORTC | STOP CONDITION |
| | BSET | SCL,PORTC | DATA GOES HIGH WHILE CLOCK HIGH |
| | BSET | SDA,PORTC | |
| | BCLR | SEN,PORTC | EN=0 |
| | RTS | | |

*** End of Program ***

*** LCD Address and Data ***

SEND

| | | |
|-----|--|--------------------|
| FCB | \$7E | LCD DRIVER ADDRESS |
| FCB | \$FF, \$FF, \$FF, \$FF, \$FF, \$FF, \$FF, \$FF | DATA TO SENT |
| FCB | \$FF, \$FF, \$FF, \$FF, \$FF, \$FF, \$FF, \$FF | |
| RTS | | |

Example 1. Serial Data Interface Method

Figure 10 shows an interface example for IIC interface.


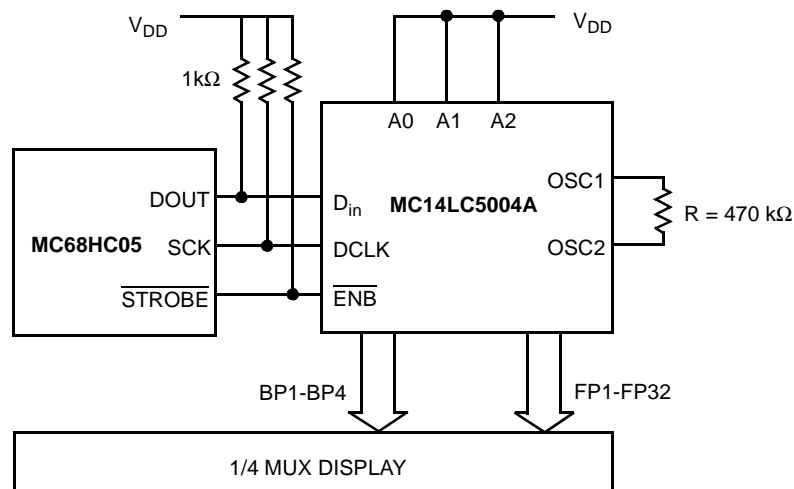


Figure 10. IIC Interface Example Between MC68HC05 and MC14LC5004A


PACKAGE DIMENSIONS

QFP
FU SUFFIX
CASE 848B-02

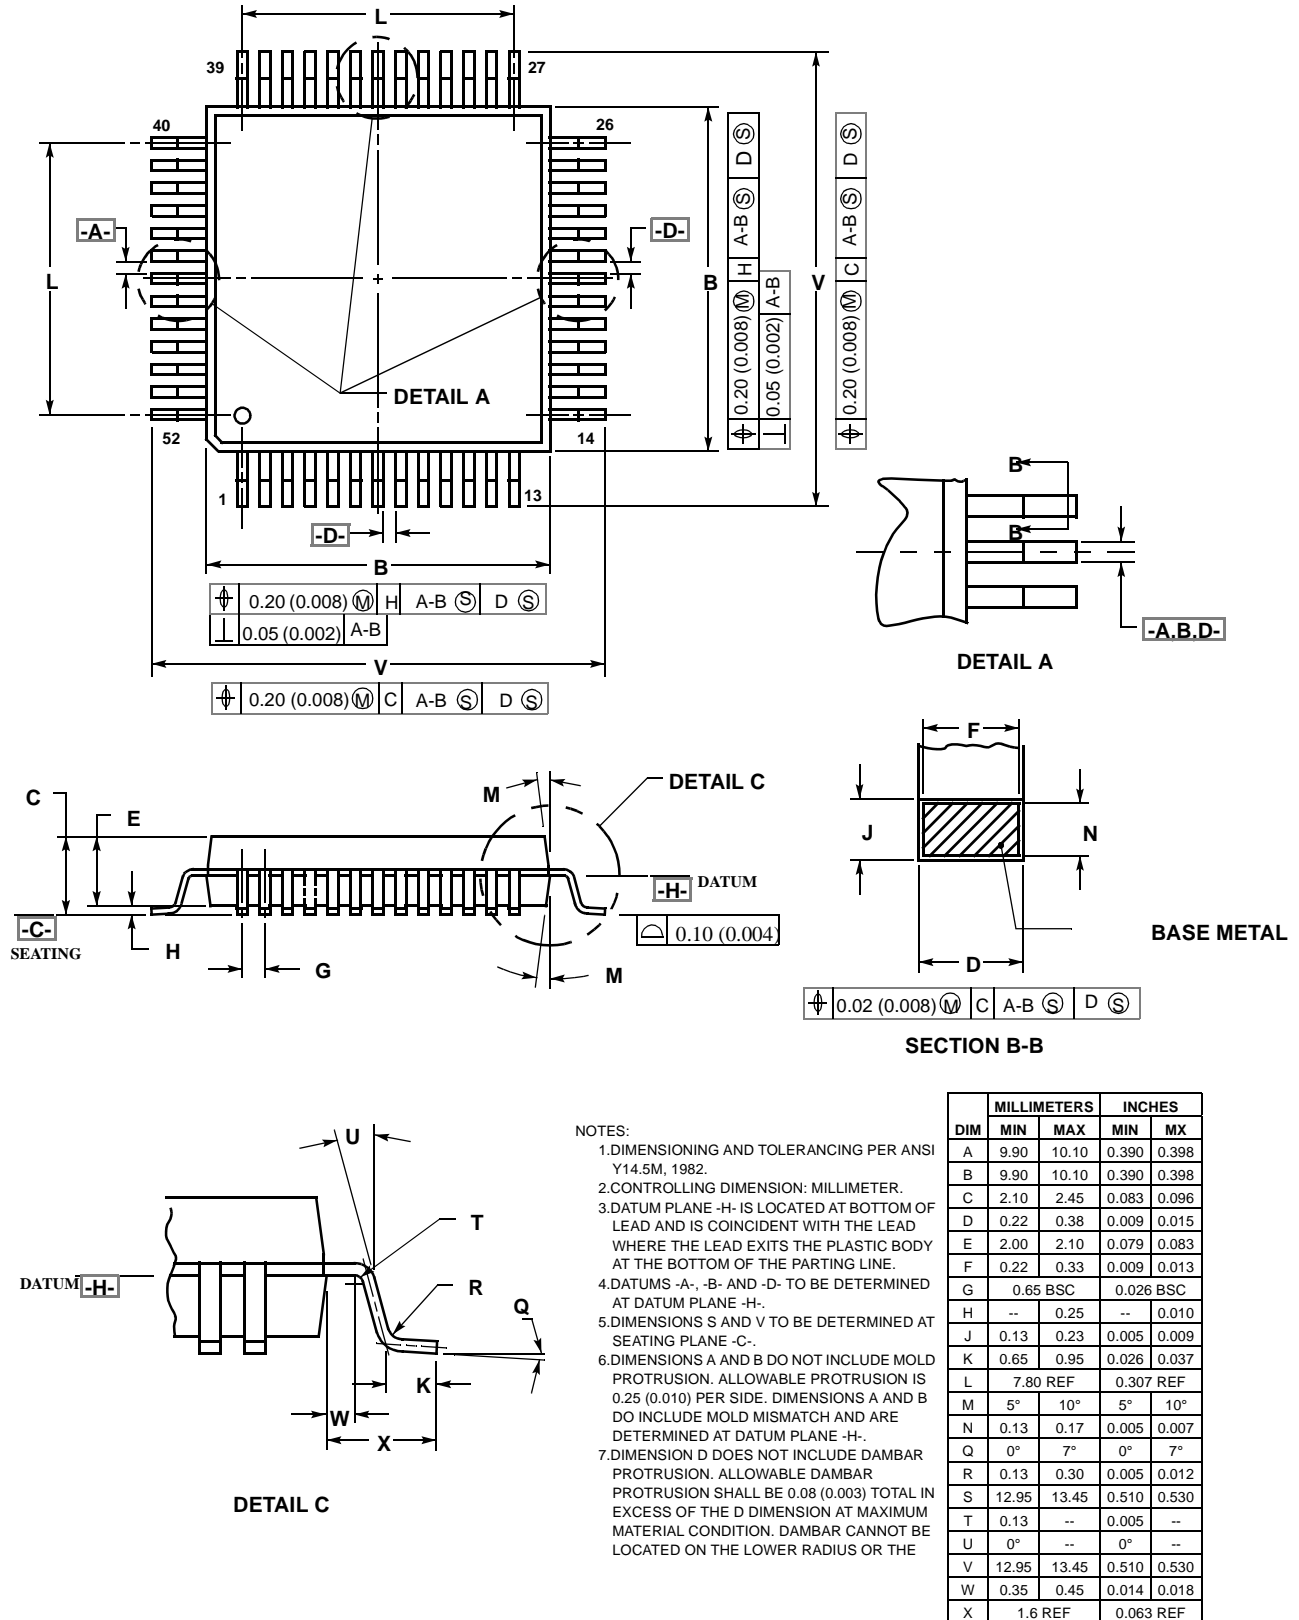


PACKAGE DIMENSIONS

TQFP
FB SUFFIX
CASE 873A-02

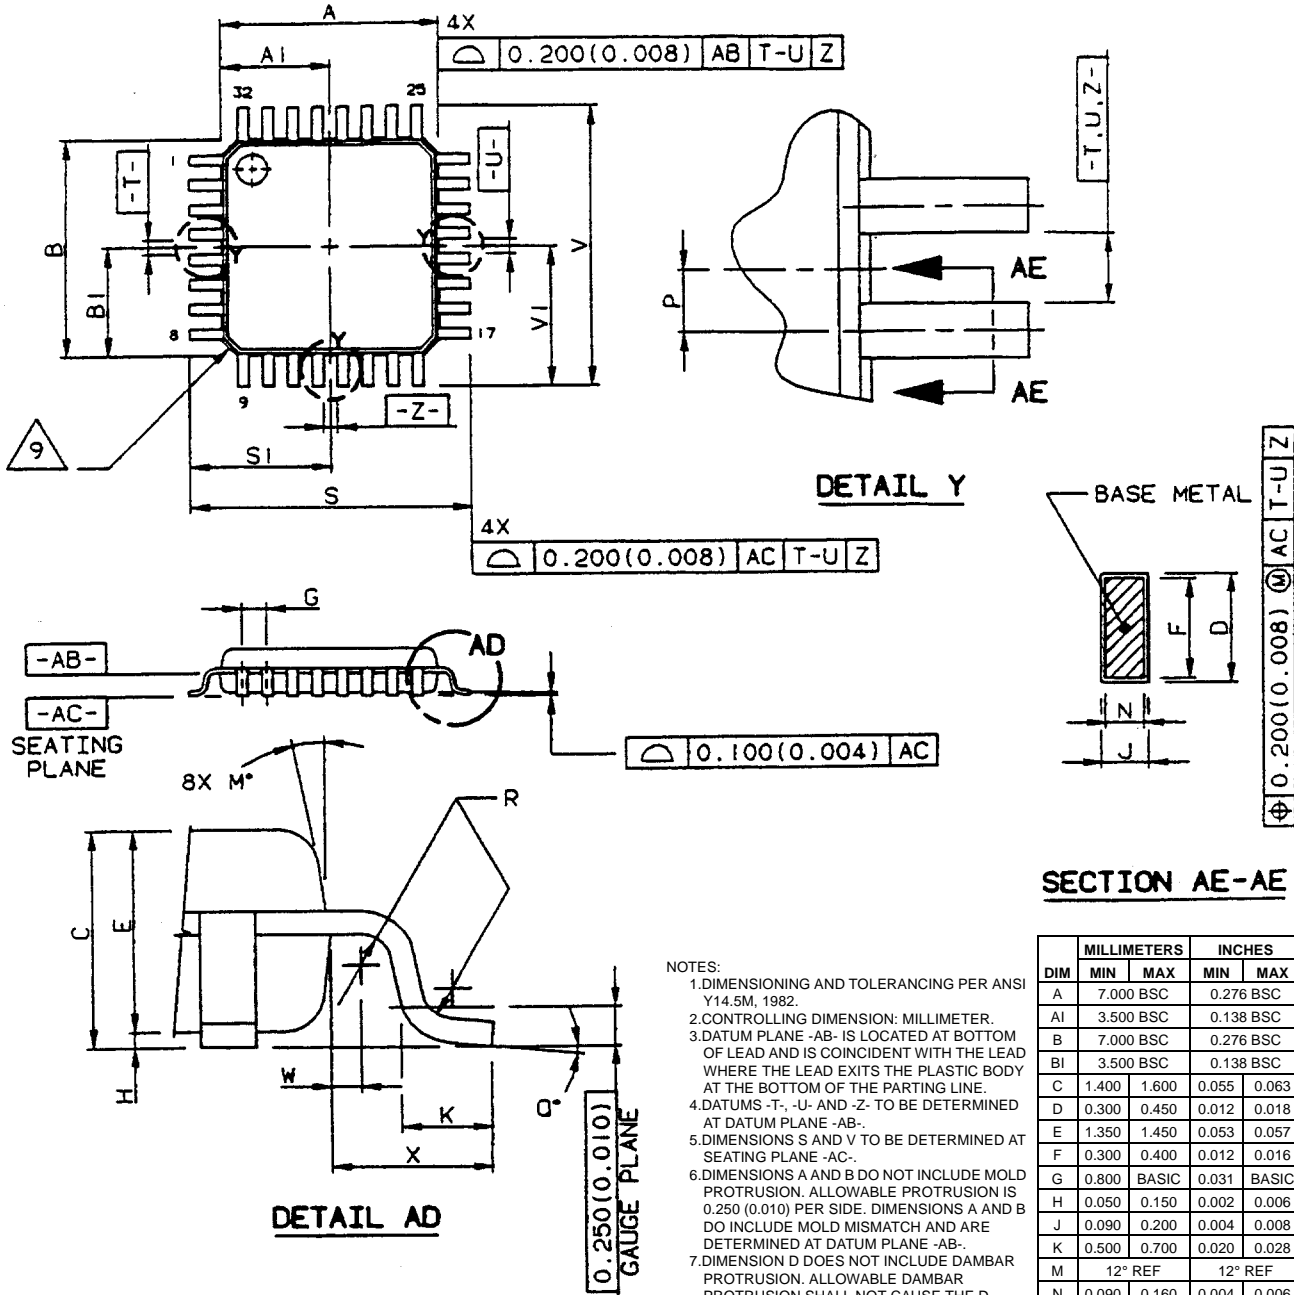

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 7.000 BSC | | 0.276 BSC | |
| A1 | 3.500 BSC | | 0.138 BSC | |
| B | 7.000 BSC | | 0.276 BSC | |
| B1 | 3.500 BSC | | 0.138 BSC | |
| C | 1.400 | 1.600 | 0.055 | 0.063 |
| D | 0.300 | 0.450 | 0.012 | 0.018 |
| E | 1.350 | 1.450 | 0.053 | 0.057 |
| F | 0.300 | 0.400 | 0.012 | 0.016 |
| G | 0.800 | BASIC | 0.031 | BASIC |
| H | 0.050 | 0.150 | 0.002 | 0.006 |
| J | 0.090 | 0.200 | 0.004 | 0.008 |
| K | 0.500 | 0.700 | 0.020 | 0.028 |
| M | 12° REF | | 12° REF | |
| N | 0.090 | 0.160 | 0.004 | 0.006 |
| P | 0.400 | BASIC | 0.016 | BASIC |
| Q | 1° | 5° | 1° | 5° |
| R | 0.150 | 0.250 | 0.006 | 0.010 |
| S | 9.000 BSC | | 0.354 BSC | |
| SI | 4.500 BSC | | 0.014 BSC | |
| V | 9.000 BSC | | 0.354 BSC | |
| VI | 4.500 BSC | | 0.014 BSC | |
| W | 0.200 REF | | 0.008 REF | |
| X | 1.000 REF | | 0.039 REF | |

BOND PAD LAYOUT

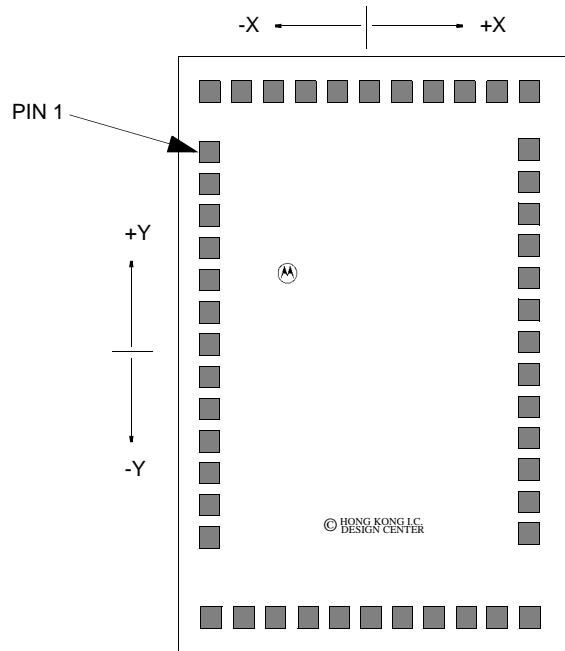

For MCC14LC5003A / MCC14LC5004A BARE DIE :

DIE SIZE : 1648.46 x 2661.92 μm^2

(64.9 x 104.8 mil², 1 mil ~ 25.4 μm)

BOND PAD SIZE : 78.23 x 78.23 μm^2


(3.08 x 3.08 mil², 1 mil ~ 25.4 μm)

Die Pad Coordinates

| Die Pad No. | Pin Name | Coordinates | |
|-------------|------------------|-------------|-----------|
| | | X | Y |
| 1 | FP32 | -584.201 | 701.040 |
| 2 | FP31 | -584.201 | 584.200 |
| 3 | FP30 | -584.201 | 467.360 |
| 4 | FP29 | -584.201 | 350.520 |
| 5 | FP28 | -584.201 | 233.680 |
| 6 | FP27 | -584.201 | 116.840 |
| 7 | FP26 | -584.201 | 0.000 |
| 8 | FP25 | -584.201 | -116.841 |
| 9 | FP24 | -584.201 | -233.681 |
| 10 | FP23 | -584.201 | -350.521 |
| 11 | FP22 | -584.201 | -467.361 |
| 12 | FP21 | -584.201 | -584.201 |
| 13 | FP20 | -584.201 | -701.041 |
| 14 | FP19 | -584.201 | -1091.121 |
| 15 | FP18 | -467.361 | -1091.121 |
| 16 | FP17 | -350.521 | -1091.121 |
| 17 | FP16 | -233.681 | -1091.121 |
| 18 | FP15 | -116.841 | -1091.121 |
| 19 | V _{LCD} | 0.000 | -1091.120 |
| 20 | V _{SS} | 116.840 | -1091.120 |
| 21 | FP14 | 233.679 | -1091.121 |
| 22 | FP13 | 350.519 | -1091.121 |
| 23 | FP12 | 467.359 | -1091.121 |
| 24 | FP11 | 584.199 | -1091.121 |

| Die Pad No. | Pin Name | Coordinates | |
|-------------|-----------------|-------------|----------|
| | | X | Y |
| 25 | FP10 | 584.199 | -701.041 |
| 26 | FP9 | 584.199 | -584.201 |
| 27 | FP8 | 584.199 | -467.361 |
| 28 | FP7 | 584.199 | -350.521 |
| 29 | FP6 | 584.199 | -233.681 |
| 30 | FP5 | 584.199 | -116.841 |
| 31 | FP4 | 584.199 | 0.000 |
| 32 | FP3 | 584.199 | 116.840 |
| 33 | FP2 | 584.199 | 233.680 |
| 34 | FP1 | 584.199 | 350.520 |
| 35 | NC | 584.200 | 467.360 |
| 36 | DCLK | 584.200 | 584.200 |
| 37 | D _{IN} | 584.200 | 701.040 |
| 38 | ENB | 584.200 | 1091.120 |
| 39 | A2 | 467.360 | 1091.120 |
| 40 | A1 | 350.520 | 1091.120 |
| 41 | A0 | 233.680 | 1091.120 |
| 42 | BP4 | 116.839 | 1091.120 |
| 43 | BP3 | -0.001 | 1091.120 |
| 44 | BP2 | -116.841 | 1091.120 |
| 45 | BP1 | -233.681 | 1091.120 |
| 46 | V _{DD} | -350.520 | 1091.120 |
| 47 | OSC2 | -467.360 | 1091.120 |
| 48 | OSC1 | -584.200 | 1091.120 |

Dimensions in μm

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its offices, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centres:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; Europe Literature Centre; 88 Tanners Drive, Blakelands Milton Keynes, MK 145BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductor H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.



MOTOROLA

MC14LC5002A • MC14LC5003A • MC14LC5004A