

DATA SHEET

128 SAL-RPM

Aluminium electrolytic capacitors

Solid Al, Radial Pearl Miniature

Product specification

1999 Apr 26

Supersedes data of January 1998

File under BC Components, BC01

Aluminium electrolytic capacitors Solid Al, Radial Pearl Miniature

128 SAL-RPM

FEATURES

- Polarized aluminium electrolytic capacitors, solid electrolyte MnO_2
- Radial leads, max. height 9.5 mm, resin dipped, orange coloured
- Extremely long useful life, 20000 hours/125 °C
- Extended usable temperature range up to 175 °C
- Excellent low temperature, impedance and ESR behaviour
- Charge and discharge proof, application with 0 Ω resistance allowed
- Reverse DC voltage up to $0.3 \times U_R$ allowed
- AC voltage up to $0.8 \times U_R$ allowed
- Advanced technology to achieve high reliability and high stability.


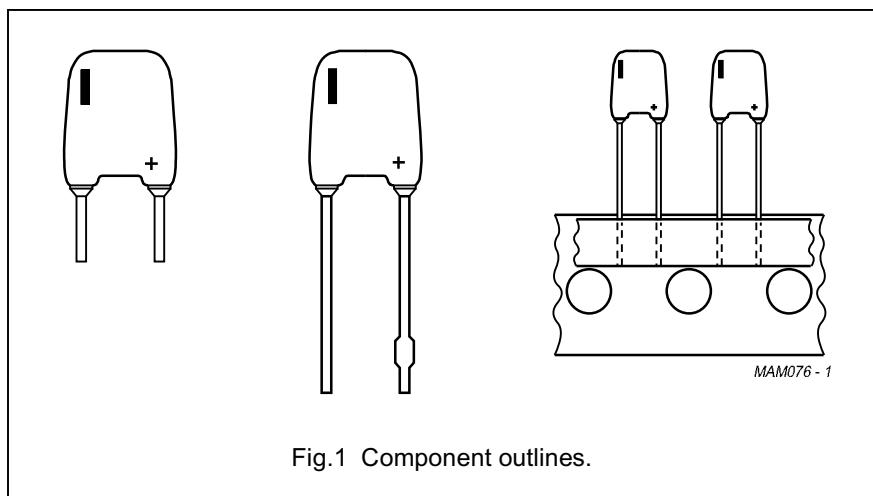


Fig.1 Component outlines.

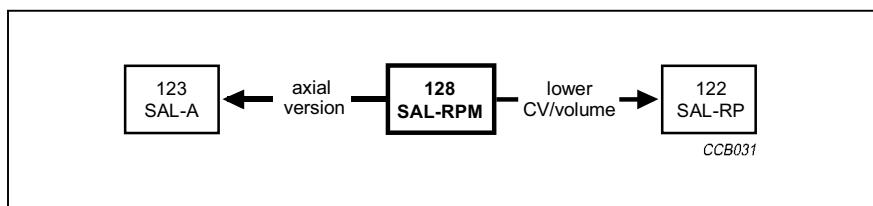

APPLICATIONS

- EDP, telecommunication, general industrial, automotive and audio-video
- Smoothing, filtering and buffering
- For small power supplies, DC/DC converters.

QUICK REFERENCE DATA

DESCRIPTION	VALUE
Case sizes ($H_{\max} \times W_{\max} \times T_{\max}$ in mm)	$9.5 \times 7 \times 3$ to $9.5 \times 8 \times 6$
Rated capacitance range (E6 series), C_R	0.1 to 68 μF
Tolerance on C_R	$\pm 20\%$
Rated voltage range, U_R	6.3 to 40 V
Category temperature range: $U_R = 6.3$ to 40 V $U_C = 6.3$ to 25 V	-55 to +85 °C -55 to +125 °C
Endurance test at 125 °C	10000 hours
Useful life at 125 °C	20000 hours
Useful life at 175 °C	2000 hours
Useful life at 40 °C, I_R applied	>300000 hours
Shelf life at 0 V, 125 °C	500 hours
Based on sectional specification	IEC 60384-4/CECC 30300
Detail specification	IEC 60384-4-2, CECC 30302
Climatic category IEC 60068	55/125/56

**Aluminium electrolytic capacitors
Solid Al, Radial Pearl Miniature**

128 SAL-RPM

Selection chart for C_R , U_R , U_C and relevant maximum case sizes ($H \times W \times T$ in mm)


Preferred types in **bold**.

C_R (μF)	U_R (V) at $T_{\text{amb}} = 85^\circ\text{C}$					
	6.3	10	16	25	35	40
	U_C (V) at $T_{\text{amb}} = 125^\circ\text{C}$					
	6.3	10	16	25	25	25
0.1	—	—	—	—	—	9.5 × 7 × 3
0.15	—	—	—	—	—	9.5 × 7 × 3
0.22	—	—	—	—	—	9.5 × 7 × 3.5
0.33	—	—	—	—	9.5 × 7 × 3.5	9.5 × 7 × 4
0.47	—	—	—	—	9.5 × 7 × 4	9.5 × 7 × 5
0.68	—	—	—	9.5 × 7 × 3.5	9.5 × 7 × 4	9.5 × 7 × 5
1	—	—	—	9.5 × 7 × 3.5	9.5 × 7 × 5	9.5 × 8 × 5
1.5	—	—	—	9.5 × 7 × 3.5	9.5 × 8 × 5	9.5 × 8 × 6
2.2	—	—	9.5 × 7 × 3.5	9.5 × 7 × 4	9.5 × 8 × 6	9.5 × 8 × 6
3.3	—	—	9.5 × 7 × 3.5	9.5 × 7 × 5	9.5 × 8 × 6	—
4.7	—	9.5 × 7 × 3.5	9.5 × 7 × 4	9.5 × 8 × 5	—	—
6.8	—	9.5 × 7 × 3.5	9.5 × 7 × 4	9.5 × 8 × 6	—	—
10	9.5 × 7 × 3.5	9.5 × 7 × 4	9.5 × 7 × 5	9.5 × 8 × 6	—	—
15	—	9.5 × 7 × 4	9.5 × 8 × 5	—	—	—
22	9.5 × 7 × 4	9.5 × 7 × 5	9.5 × 8 × 6	—	—	—
33	9.5 × 7 × 5	9.5 × 8 × 5	—	—	—	—
47	9.5 × 8 × 5	9.5 × 8 × 6	—	—	—	—
68	9.5 × 8 × 6	—	—	—	—	—

Aluminium electrolytic capacitors

Solid Al, Radial Pearl Miniature

128 SAL-RPM

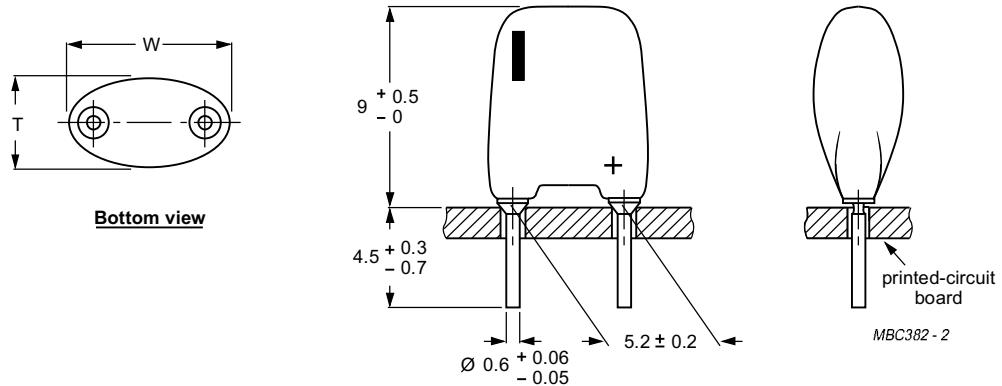MECHANICAL DATA, AVAILABLE FORMS AND PACKAGING QUANTITIES


Dimensions in mm.

For dimensions see Table 1.

The diameter of the mounting holes in the printed-circuit board is 0.8 ± 0.1 mm.

Flanges are provided with degassing grooves.

Fig.2 Form CB: Short leads, in boxes.

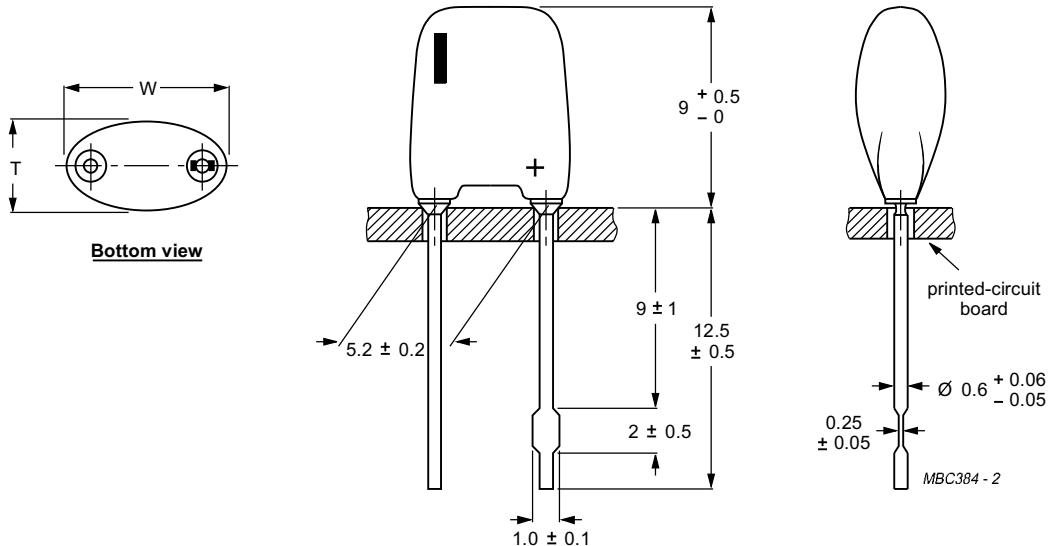

Dimensions in mm.

For dimensions see Table 1.

The diameter of the mounting holes in the printed-circuit board is 0.8 ± 0.1 mm, except for the hole of the anode lead of Form CA capacitors: 1.3 – 0.2 mm.

Flanges are provided with degassing grooves.

Fig.3 Form CA: Long leads with keyed polarity, in boxes.

Aluminium electrolytic capacitors

Solid Al, Radial Pearl Miniature

128 SAL-RPM

Table 1 Physical dimensions, mass and packaging quantities; see Figs 2 and 3


MAXIMUM CASE SIZE H × W × T (mm)	CASE CODE	MASS (g)	PACKAGING QUANTITIES			
			FORM CA (note 1)	FORM CB (note 1)	FORM TR+	FORM TFA
9.5 × 7 × 3	10	≈0.22	1000	1000	2000	2000
9.5 × 7 × 3.5	20	≈0.25	1000	1000	2000	2000
9.5 × 7 × 4	30	≈0.30	1000	1000	2000	2000
9.5 × 7 × 5	40	≈0.35	1000	1000	1000	1000
9.5 × 8 × 5	50	≈0.50	1000	1000	1000	1000
9.5 × 8 × 6	60	≈0.60	1000	1000	1000	1000

Note

1. In plastic bags of 200 units each.

TAPED PRODUCTS

Tape dimensions are specified in data handbook PA01, section "Packaging".

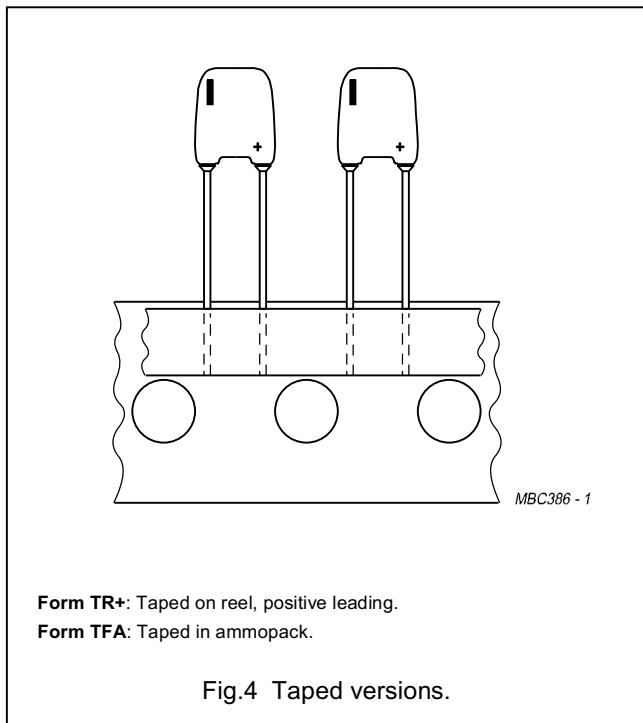**MARKING**

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF)
- Tolerance code on rated capacitance (M for $\pm 20\%$)
- Rated voltage (in V) and category voltage if applicable
- Date code in accordance with "IEC 60062"
- Name of manufacturer
- '+' sign to indicate the anode terminal
- 'I' sign to indicate the cathode terminal.

MOUNTING

When bending, cutting or straightening the leads, ensure that the capacitor body is relieved of stress.

Bending after soldering must be avoided.

ELECTRICAL DATA AND ORDERING INFORMATION

Unless otherwise specified, all electrical values in Table 2 apply at $T_{amb} = 20$ to $25^{\circ}C$,
 $P = 86$ to 106 kPa, $RH = 45$ to 75% .

C_R	rated capacitance at 100 Hz, tolerance $\pm 20\%$
I_R	max. RMS ripple current no necessary DC applied
I_{L5}	max. leakage current after 5 minutes at U_R
$\tan \delta$	max. dissipation factor at 100 Hz
ESR	max. equivalent series resistance at 100 Hz
Z	max. impedance at 100 kHz

Aluminium electrolytic capacitors Solid Al, Radial Pearl Miniature

128 SAL-RPM

Ordering example

Electrolytic capacitors 128 series

$10 \mu F/16 V; \pm 20\%$

Maximum case size: $9.5 \times 7 \times 5$ mm; Form CB

Catalogue number: 22222 128 55109.

Table 2 Electrical data and ordering information 128 series; preferred types in **bold**

U_C (V)	U_R (V)	C_R 100 Hz (μF)	I_R 100 Hz (mA)	MAXIMUM CASE SIZE $H \times W \times T$ (mm)	CASE CODE	I_R	I_{R}	I_{R}	I_{R}	I_{L5} 5 min (μA)	$\tan \delta$ 100 Hz 100 Hz	ESR 100 Hz 100 Hz	Z 100 kHz (Ω)	CATALOGUE NUMBER 22222 128.....		
						100 Hz	100 kHz	100 kHz	$85^{\circ}C$	$40^{\circ}C$	100 kHz (mA)	100 kHz (mA)	100 kHz (mA)	$FORM$ CB	$FORM$ CA	$FORM$ $TR+$ $REEL$
6.3	6.3	10	$9.5 \times 7 \times 3.5$	20	22.4	320	595	2	0.10	20	2.0	53109	73109	23109	33109	
		22	$9.5 \times 7 \times 4$	30	32.9	470	870	4	0.10	9	1.0	53229	73229	23229	33229	
		33	$9.5 \times 7 \times 5$	40	65.4	595	1100	5	0.10	6.1	0.70	53339	73339	23339	33339	
		47	$9.5 \times 8 \times 5$	50	118.4	740	1360	7	0.10	4.3	0.50	53479	73479	23479	33479	
		68	$9.5 \times 8 \times 6$	60	153.0	800	1650	11	0.10	3.0	0.40	53689	73689	23689	33689	
10	10	4.7	$9.5 \times 7 \times 3.5$	20	16.1	230	425	2	0.10	43	3.00	54478	74478	24478	34478	
		6.8	$9.5 \times 7 \times 3.5$	20	18.9	270	500	2	0.10	30	2.20	54688	74688	24688	34688	
		10	$9.5 \times 7 \times 4$	30	21.7	310	573	3	0.10	20	1.70	54109	74109	24109	34109	
		15	$9.5 \times 7 \times 4$	30	27.3	390	720	4	0.10	14	1.20	54159	74159	24159	34159	
		22	$9.5 \times 7 \times 5$	40	51.7	470	870	6	0.10	9	0.90	54229	74229	24229	34229	
		33	$9.5 \times 8 \times 5$	50	81.6	510	940	8	0.10	6.1	0.60	54339	74339	24339	34339	
		47	$9.5 \times 8 \times 6$	60	105.4	620	1140	12	0.10	4.3	0.40	54479	74479	24479	34479	
16	16	2.2	$9.5 \times 7 \times 3.5$	20	14.0	200	370	2	0.10	91	4.50	55228	75228	25228	35228	
		3.3	$9.5 \times 7 \times 3.5$	20	16.1	230	425	2	0.10	61	3.30	55338	75338	25338	35338	
		4.7	$9.5 \times 7 \times 4$	30	18.9	270	500	2	0.10	43	2.30	55478	75478	25478	35478	
		6.8	$9.5 \times 7 \times 4$	30	22.4	320	590	3	0.10	30	1.65	55688	75688	25688	35688	
		10	$9.5 \times 7 \times 5$	40	42.9	390	720	4	0.10	20	1.10	55109	75109	25109	35109	
		15	$9.5 \times 8 \times 5$	50	71.2	445	820	6	0.10	14	0.85	55159	75159	25159	35159	
		22	$9.5 \times 8 \times 6$	60	86.7	510	940	9	0.10	9	0.65	55229	75229	25229	35229	

**Aluminium electrolytic capacitors
Solid Al, Radial Pearl Miniature**

128 SAL-RPM

										CATALOGUE NUMBER 2222 128....				
Uc (V)	Ur (V)	C _R 100 Hz (μF)	MAXIMUM CASE SIZE H × W × T (mm)	CASE CODE	I _R 100 Hz (mA)	I _R 10 kHz 85 °C (mA)	I _R 100 kHz 40 °C (mA)	I _{L5} 5 min (μA)	Tan δ 100 Hz (Ω)	Z 100 kHz (Ω)	FORM CA	FORM CB	FORM TR+ REEL	FORM TFA AMMO
25	25	0.68	9.5 × 7 × 3.5	20	7.7	110	200	2	0.10	295	17.00	56687	26687	36687
	1	9.5 × 7 × 3.5	20	9.1	130	240	2	0.10	200	12.50	56108	26108	36108	
1.5		9.5 × 7 × 3.5	20	10.8	155	285	2	0.10	135	9.50	56158	26158	36158	
2.2	9.5 × 7 × 4	30	13.6	195	360	2	0.10	91	7.00	56228	26228	36228		
3.3	9.5 × 7 × 5	40	16.1	230	425	2	0.10	61	5.20	56338	26338	36338		
4.7	9.5 × 8 × 5	50	25.3	270	500	3	0.10	43	3.50	56478	26478	36478		
6.8	9.5 × 8 × 6	60	52.7	310	570	4	0.10	30	2.70	56688	26688	36688		
10	9.5 × 8 × 6	60	64.8	360	660	6	0.10	20	2.00	56109	26109	36109		
25	35	0.33	9.5 × 7 × 3.5	20	5.6	80	145	2	0.10	610	27.00	50337	20337	30337
	0.47	9.5 × 7 × 4	30	6.3	90	165	2	0.10	430	20.00	50477	20477	30477	
0.68		9.5 × 7 × 4	30	7.7	110	205	2	0.10	295	15.00	50687	20687	30687	
1	9.5 × 7 × 5	40	13.7	125	230	2	0.10	200	10.00	50108	20108	30108		
1.5	9.5 × 8 × 5	50	24.8	155	285	2	0.10	135	7.00	50158	20158	30158		
2.2	9.5 × 8 × 6	60	33.1	195	360	2	0.10	91	4.50	50228	20228	30228		
3.3	9.5 × 8 × 6	60	39.9	235	435	3	0.10	61	3.50	50338	20338	30338		
25	40	0.1	9.5 × 7 × 3	10	2.0	40	75	2	0.10	1990	45.00	57107	27107	37107
	0.15	9.5 × 7 × 3	10	2.5	50	95	2	0.10	1330	35.00	57157	27157	37157	
0.22	9.5 × 7 × 3.5	20	4.2	60	115	2	0.10	910	27.00	57227	27227	37227		
0.33	9.5 × 7 × 4	30	5.3	75	140	2	0.10	610	20.00	57337	27337	37337		
0.47	9.5 × 7 × 5	40	10.4	95	175	2	0.10	430	15.00	57477	27477	37477		
0.68	9.5 × 7 × 5	40	12.1	110	205	2	0.10	295	10.00	57687	27687	37687		
1	9.5 × 8 × 5	50	20.0	125	230	2	0.10	200	7.00	57108	27108	37108		
1.5	9.5 × 8 × 6	60	25.5	150	280	2	0.10	135	5.50	57158	27158	37158		
2.2	9.5 × 8 × 6	60	33.1	195	360	2	0.10	91	4.20	57228	27228	37228		

Aluminium electrolytic capacitors

Solid Al, Radial Pearl Miniature

128 SAL-RPM


Additional electrical data

PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage for short periods		$U_s \leq 1.15 \times U_R$
Reverse voltage		$U_{rev} < 0.3 \times U_R$
Maximum peak AC voltage	reverse voltage applied	$\leq 2 \text{ V}$
Maximum peak AC voltage, without reverse voltage applied	$T_{amb} \leq 85 \text{ }^{\circ}\text{C}$: at $f \leq 0.1 \text{ Hz}$ at $0.1 \text{ Hz} < f \leq 1 \text{ Hz}$ at $1 \text{ Hz} < f \leq 10 \text{ Hz}$ at $10 \text{ Hz} < f \leq 50 \text{ Hz}$ at $f > 50 \text{ Hz}$ $85 \text{ }^{\circ}\text{C} < T_{amb} \leq 125 \text{ }^{\circ}\text{C}$: at $f \leq 0.1 \text{ Hz}$ at $0.1 \text{ Hz} < f \leq 1 \text{ Hz}$ at $1 \text{ Hz} < f \leq 10 \text{ Hz}$ at $10 \text{ Hz} < f \leq 50 \text{ Hz}$ at $f > 50 \text{ Hz}$	$0.30 \times U_R$ $0.45 \times U_R$ $0.60 \times U_R$ $0.65 \times U_R$ $0.80 \times U_R$ $0.15 \times U_R$ $0.22 \times U_R$ $0.30 \times U_R$ $0.32 \times U_R$ $0.40 \times U_R$
Inductance		
Equivalent series inductance (ESL)	case sizes $9.5 \times 7 \times 3$ to $9.5 \times 7 \times 5 \text{ mm}$	typ. 9 to 14 nH
	case sizes $9.5 \times 8 \times 5$ and $9.5 \times 8 \times 6 \text{ mm}$	typ. 11 to 16 nH
	all case sizes	max. 20 nH
Dissipation		
Maximum power dissipation	case sizes $9.5 \times 7 \times 3$ to $9.5 \times 7 \times 5 \text{ mm}$	$P_{125} = 88 \text{ mW}$
	case sizes $9.5 \times 8 \times 5$ and $9.5 \times 8 \times 6 \text{ mm}$	$P_{125} = 104 \text{ mW}$
Current		
Maximum leakage current	after 5 minutes at U_R and $T_{amb} = 25 \text{ }^{\circ}\text{C}$	$I_{L5} \leq 0.025C_R \times U_R$ or $2 \mu\text{A}$ whichever is greater; see Table 2
Typical leakage current	15 s at U_R and $T_{amb} = 25 \text{ }^{\circ}\text{C}$: $U_R = 6.3 \text{ to } 16 \text{ V}$ $U_R = 25 \text{ to } 40 \text{ V}$	$\approx 0.2 \times$ value stated in Table 2 $\approx 0.1 \times$ value stated in Table 2

Aluminium electrolytic capacitors

Solid Al, Radial Pearl Miniature

128 SAL-RPM

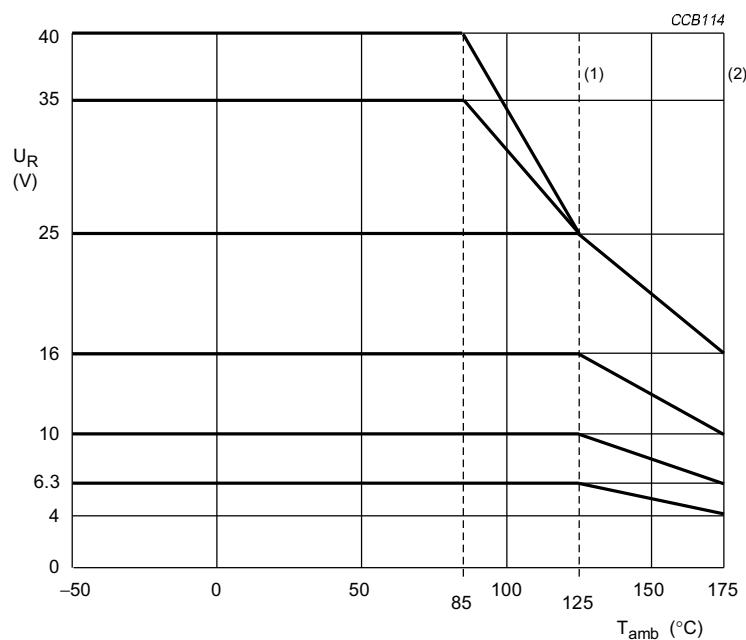VoltageFig.5 Maximum permissible voltage up to $T_{amb} = 175\text{ }^{\circ}\text{C}$.**Ripple current (I_R)**


Applying the maximum RMS ripple current given in Table 2 will cause a device temperature of $138\text{ }^{\circ}\text{C}$. The 100 kHz values in Table 2 for other temperatures are to be calculated with the following I_R multipliers:

PARAMETER	T_{amb}					
	25 $^{\circ}\text{C}$	40 $^{\circ}\text{C}$	65 $^{\circ}\text{C}$	85 $^{\circ}\text{C}$	105 $^{\circ}\text{C}$	125 $^{\circ}\text{C}$
I_R multiplier	1.1	1.0	0.88	0.75	0.59	0.37

**Aluminium electrolytic capacitors
Solid Al, Radial Pearl Miniature**

128 SAL-RPM

Capacitance (C)

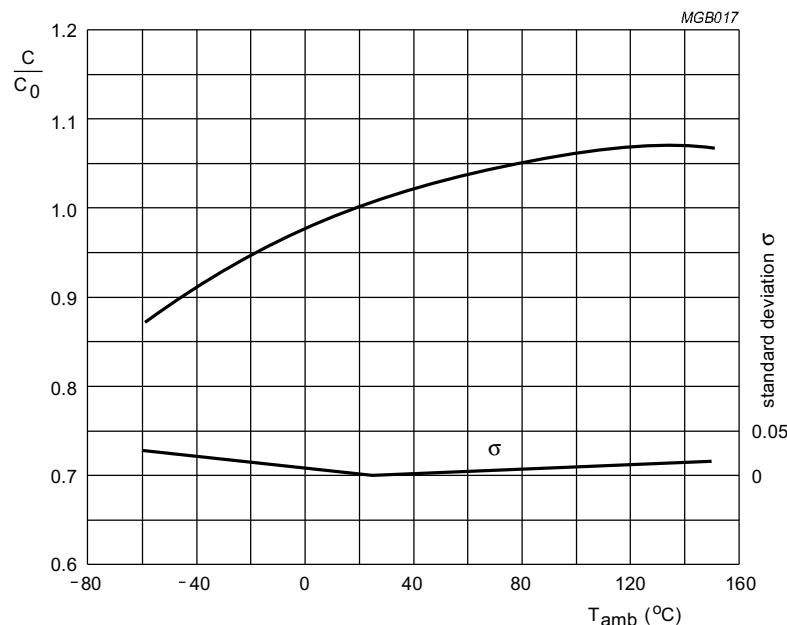

C_0 = capacitance at 25 °C and 100 Hz.

Fig.6 Typical multiplier of capacitance and standard deviation as functions of ambient temperature.

Typical capacitance change after endurance test at $T_{\text{amb}} = 125$ °C


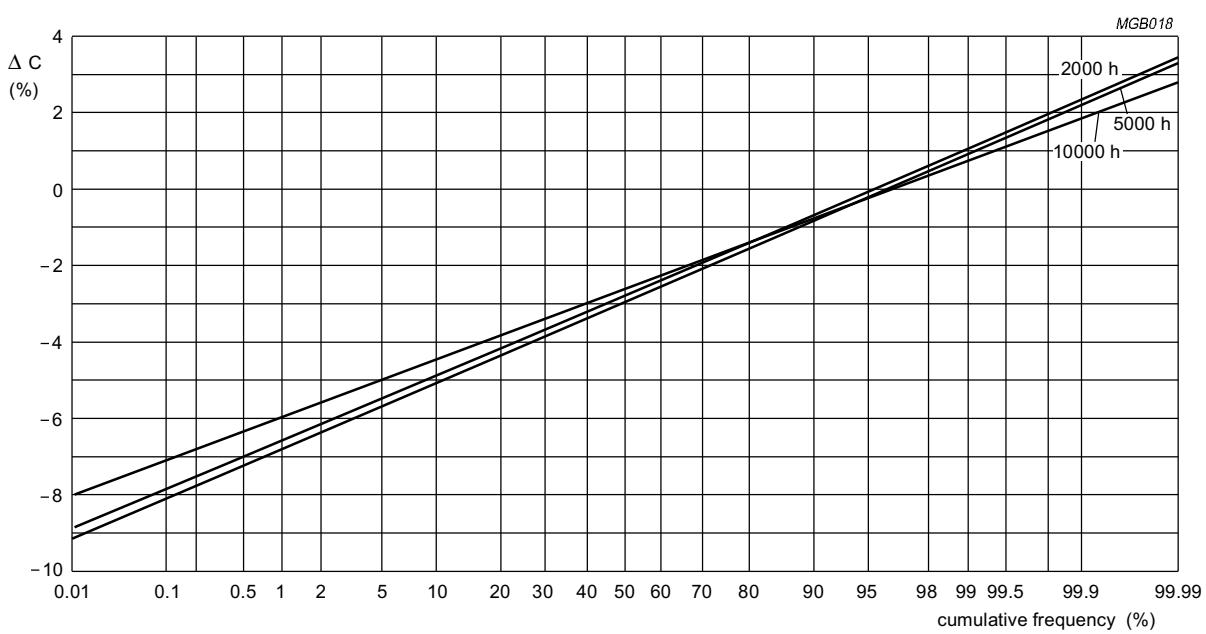


Fig.7 Change of capacitance as a function of cumulative frequency after endurance test.

**Aluminium electrolytic capacitors
Solid Al, Radial Pearl Miniature**

128 SAL-RPM

Leakage current

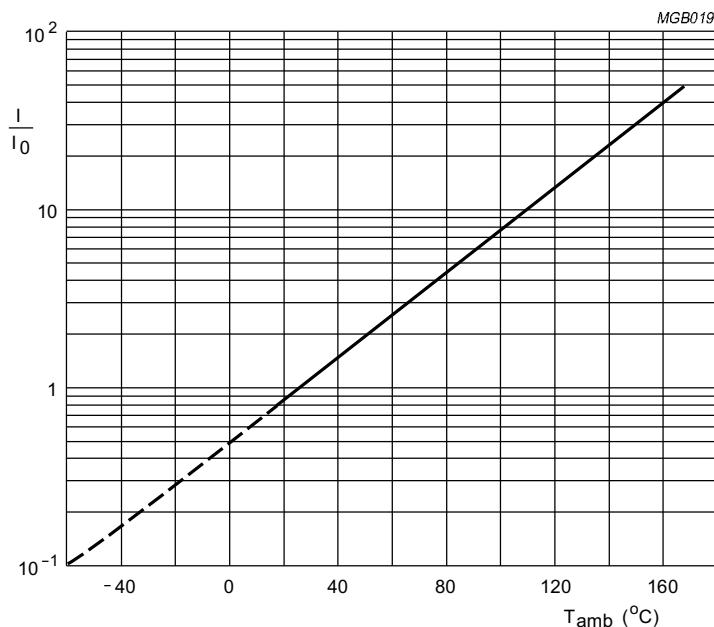

I₀ = leakage current during continuous operation at U_R and T_{amb} = 25 °C.

Fig.8 Typical multiplier of leakage current as a function of ambient temperature.

Typical leakage current change after endurance test at T_{amb} = 125 °C

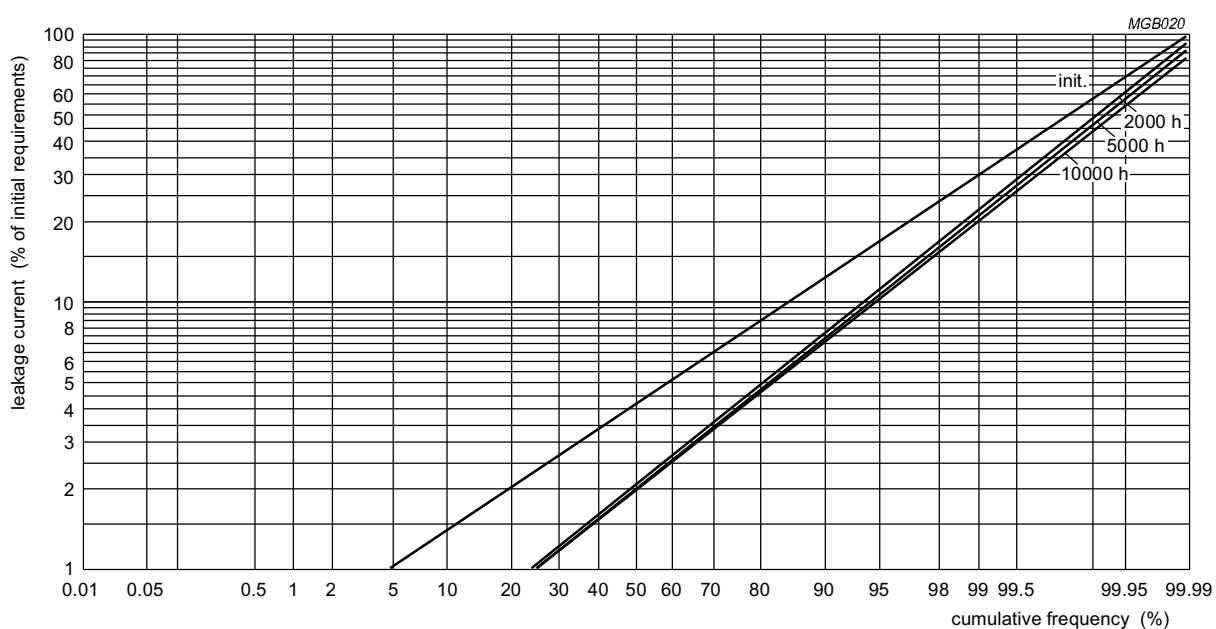
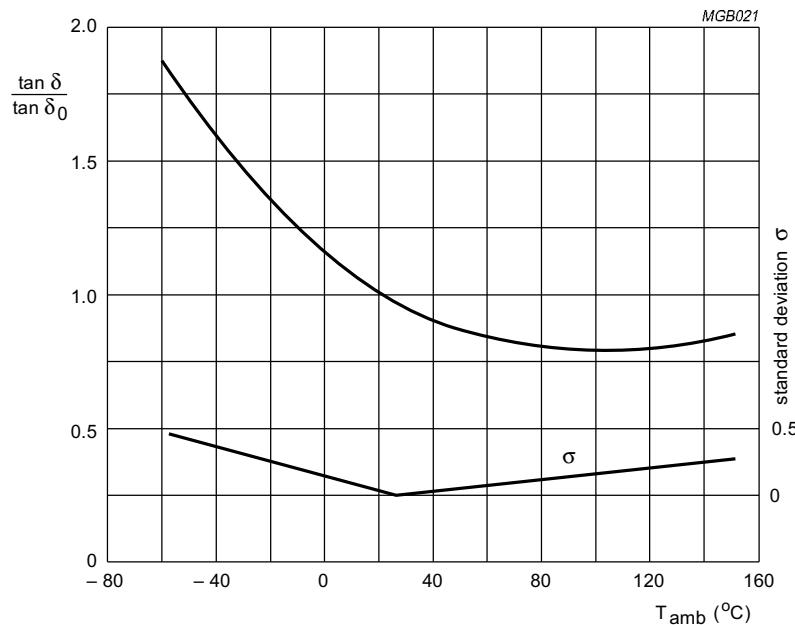


Fig.9 Leakage current change as a function of cumulative frequency after endurance test.

Aluminium electrolytic capacitors

Solid Al, Radial Pearl Miniature

128 SAL-RPM

Dissipation factor ($\tan \delta$)

$\tan \delta_0$ = dissipation factor at $T_{amb} = 25$ °C and 100 Hz.

Fig.10 Typical multiplier of dissipation factor and standard deviation as functions of ambient temperature.

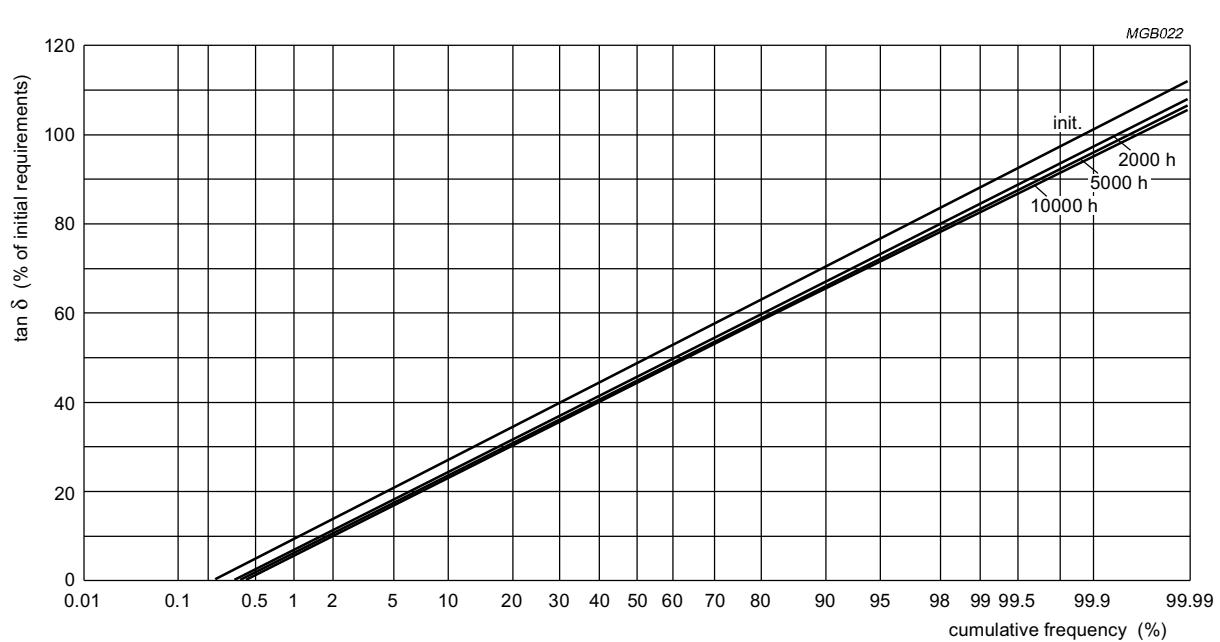
Typical $\tan \delta$ change after endurance test at $T_{amb} = 125$ °C

Fig.11 Tan δ change as a function of cumulative frequency after endurance test.

Aluminium electrolytic capacitors

Solid Al, Radial Pearl Miniature

128 SAL-RPM

Equivalent series resistance (ESR)

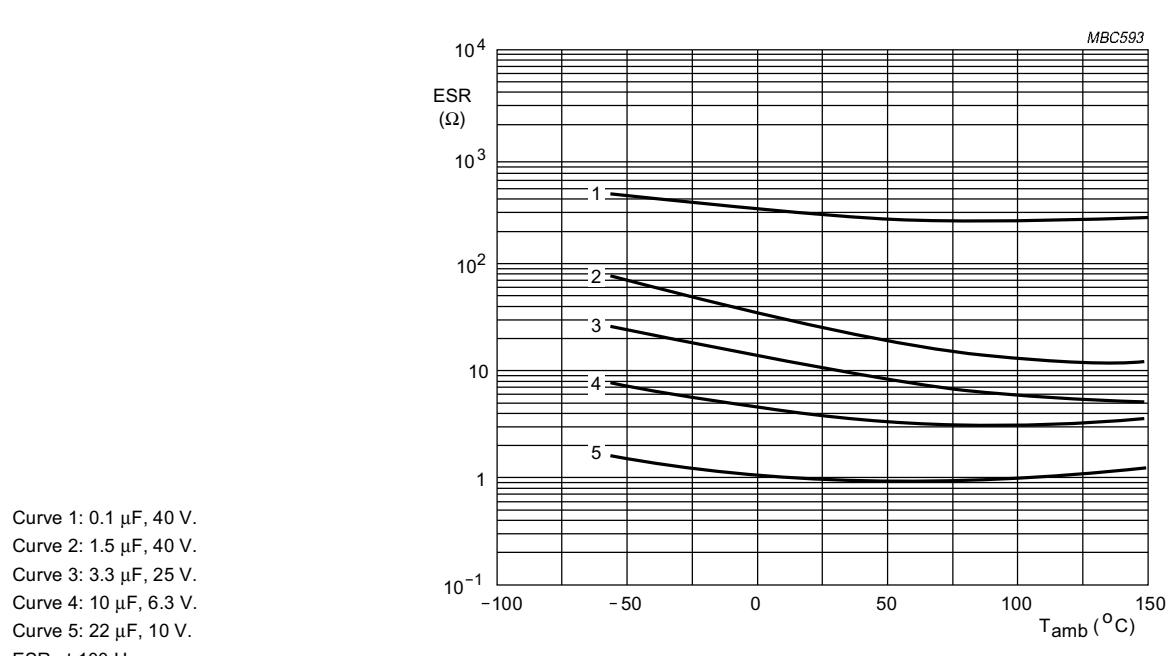


Fig.12 Typical ESR as a function of ambient temperature.

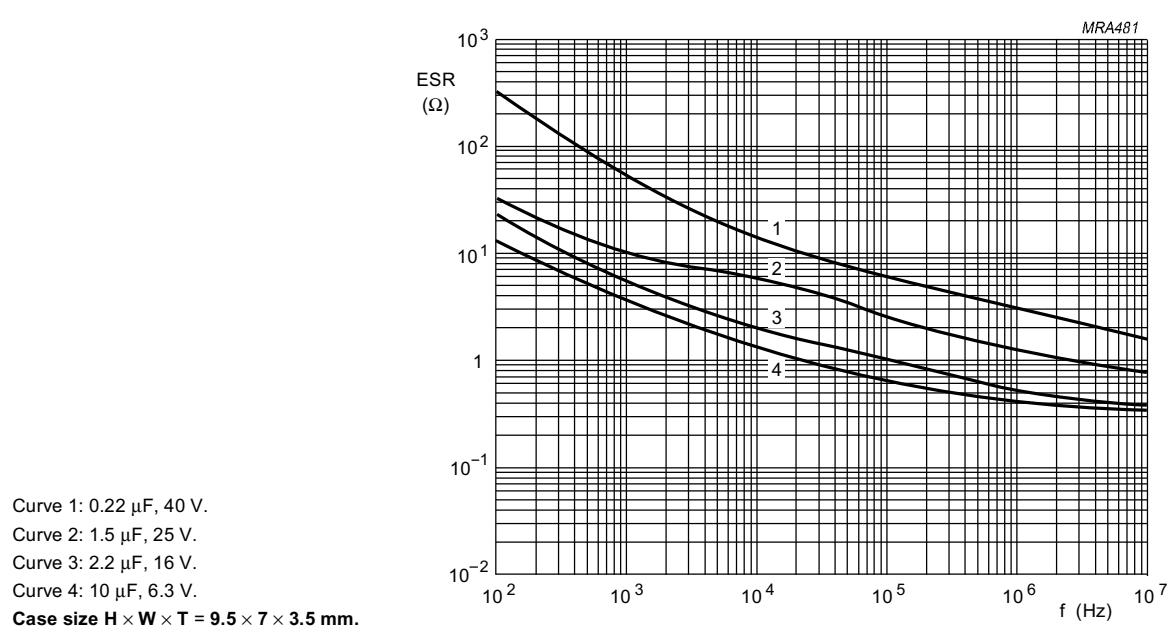


Fig.13 Typical ESR as a function of frequency.

Aluminium electrolytic capacitors

Solid Al, Radial Pearl Miniature

128 SAL-RPM

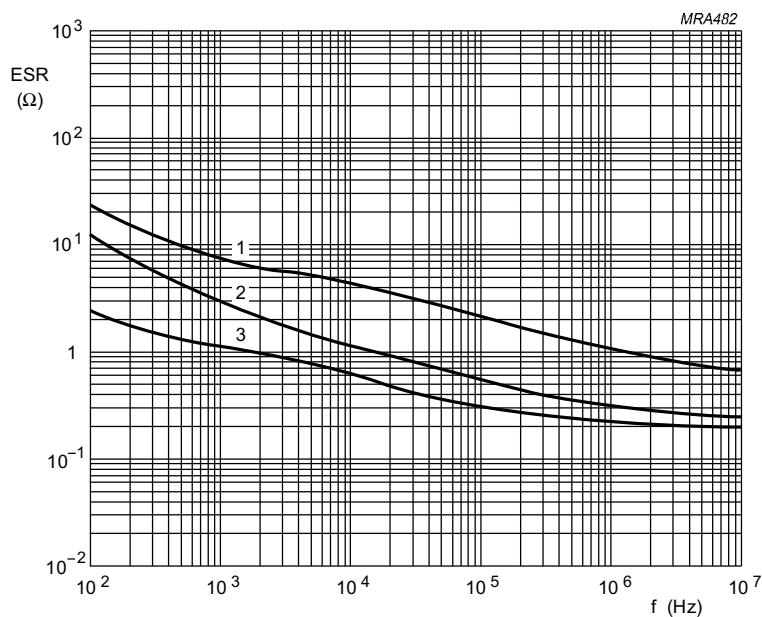


Fig.14 Typical ESR as a function of frequency.



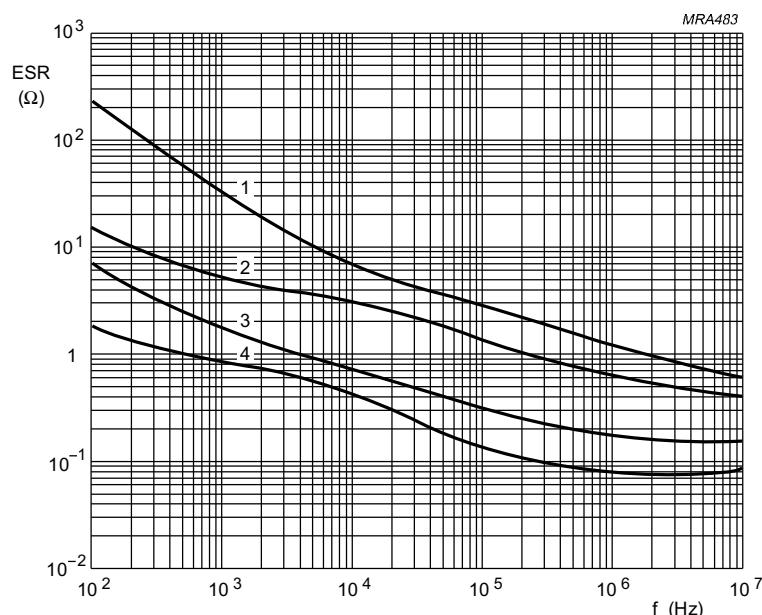


Fig.15 Typical ESR as a function of frequency.

Aluminium electrolytic capacitors Solid Al, Radial Pearl Miniature

128 SAL-RPM

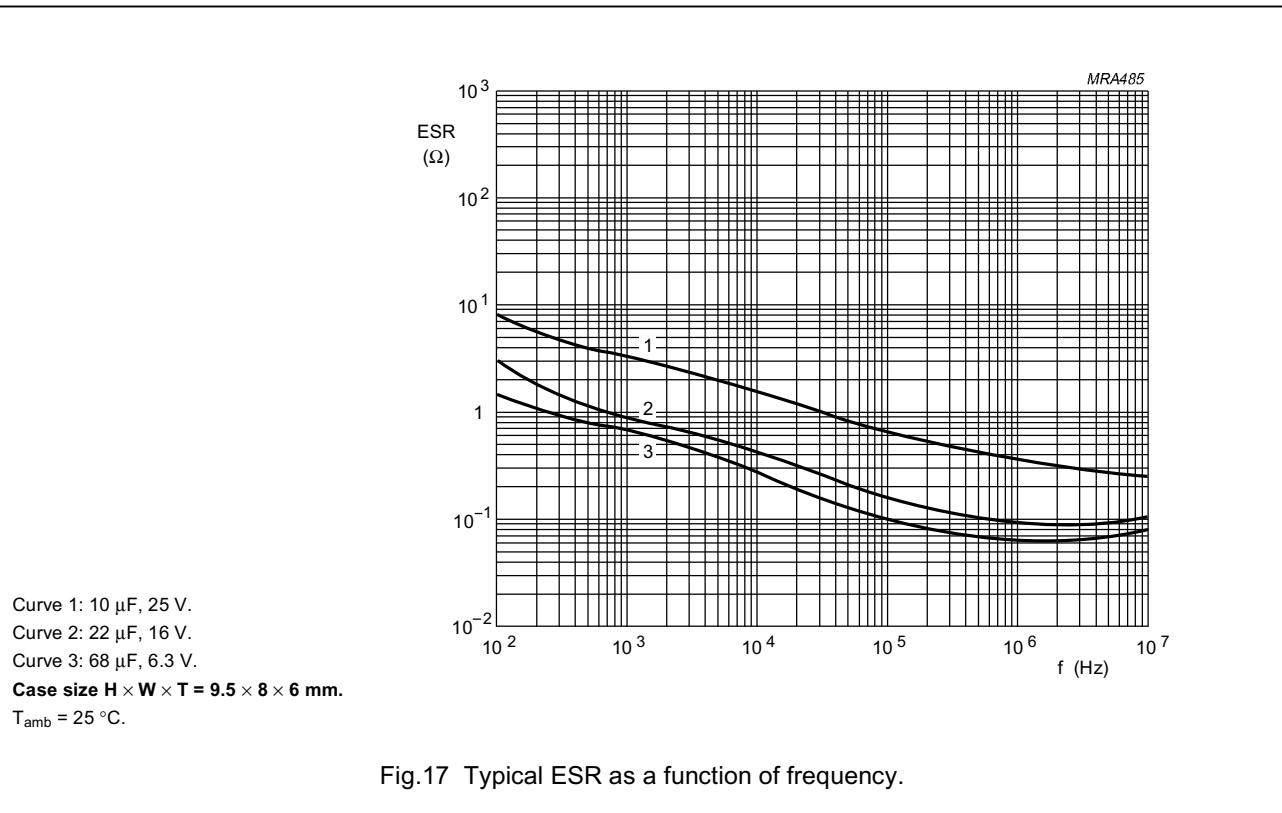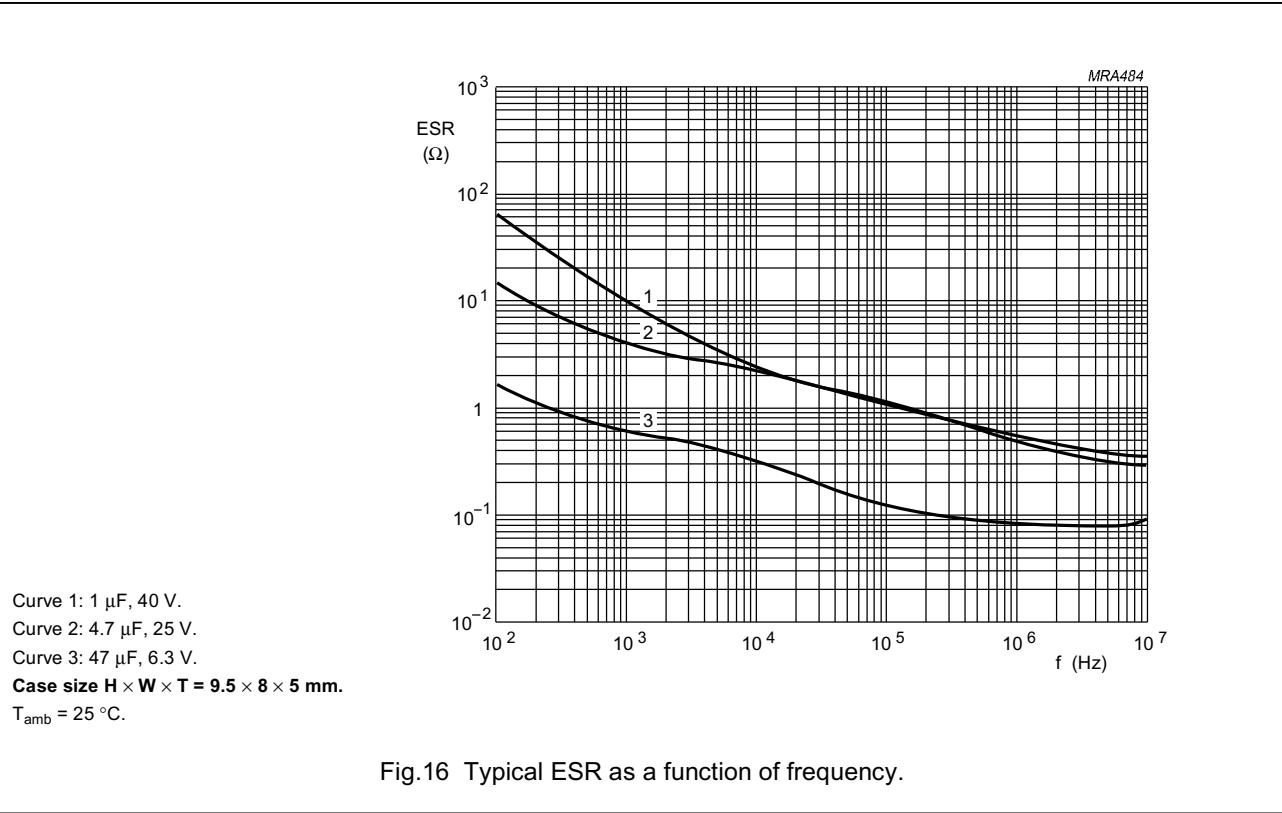

Aluminium electrolytic capacitors

Solid Al, Radial Pearl Miniature

128 SAL-RPM

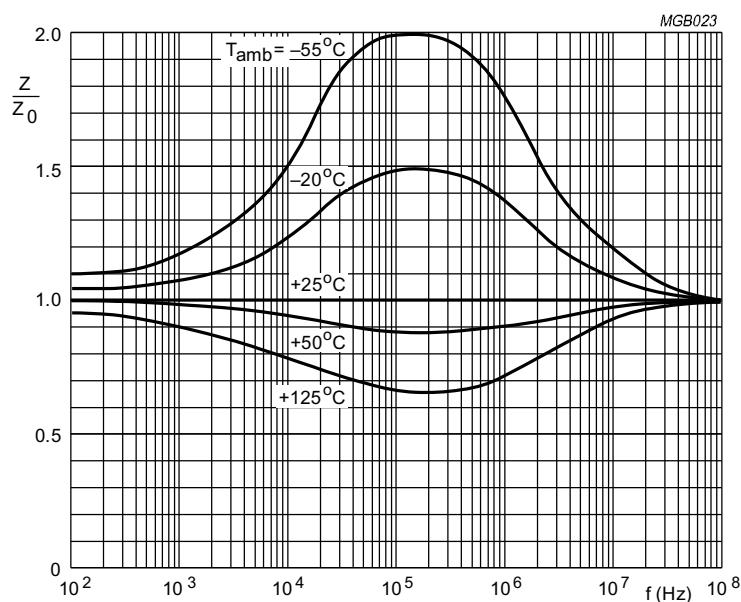
Impedance (Z)

Fig.18 Typical multiplier of impedance as a function of frequency at different ambient temperatures.

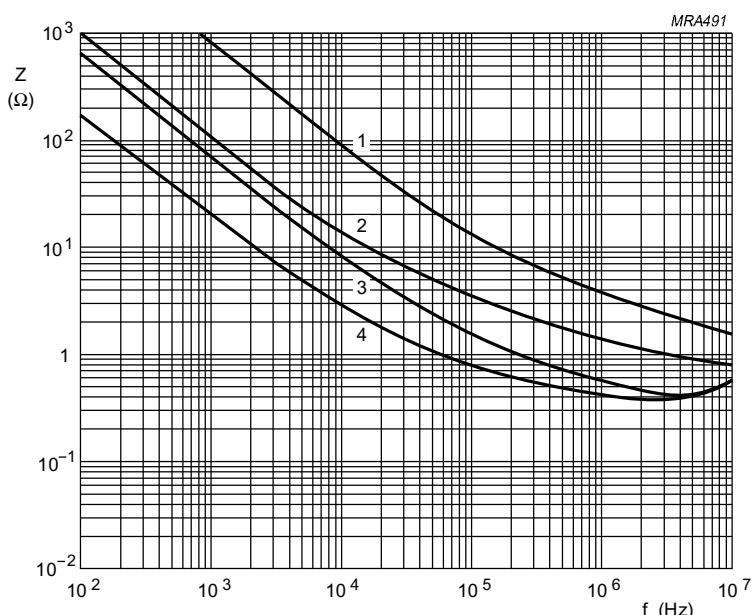


Fig.19 Typical impedance as a function of frequency.

**Aluminium electrolytic capacitors
Solid Al, Radial Pearl Miniature**

128 SAL-RPM

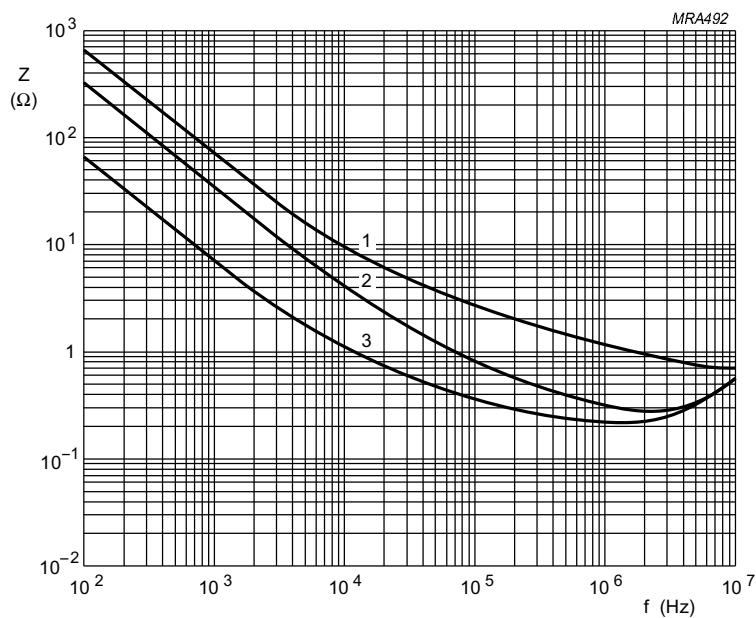


Fig.20 Typical impedance as a function of frequency.

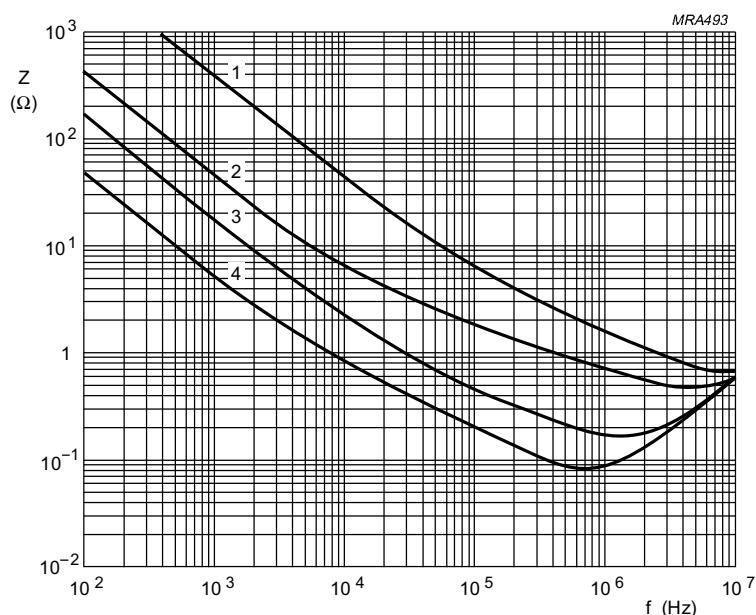


Fig.21 Typical impedance as a function of frequency.

**Aluminium electrolytic capacitors
Solid Al, Radial Pearl Miniature**

128 SAL-RPM

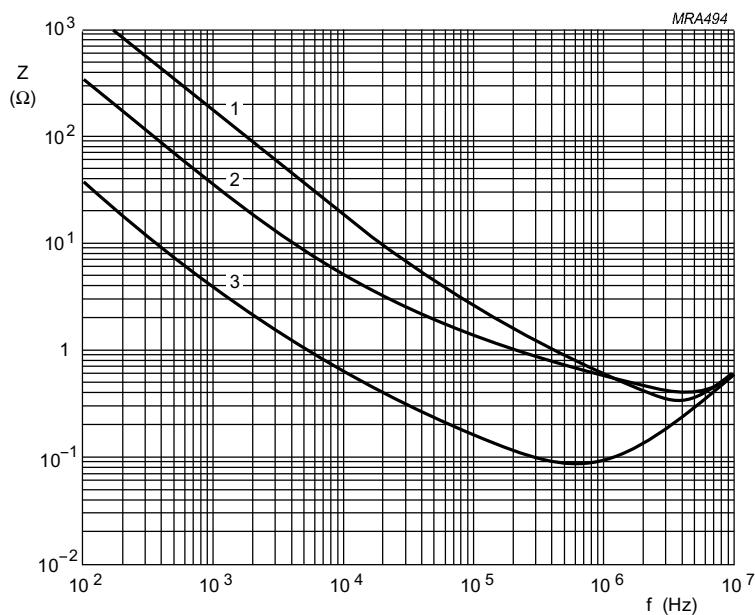


Fig.22 Typical impedance as a function of frequency.

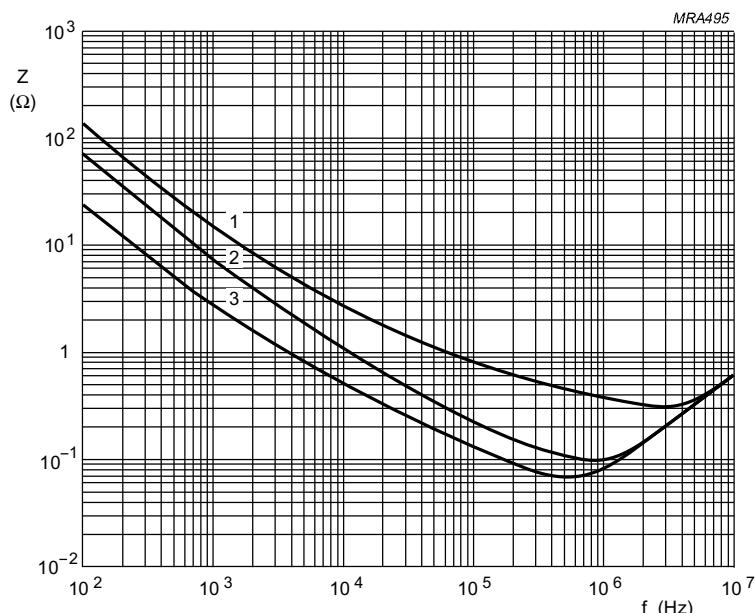


Fig.23 Typical impedance as a function of frequency at $T_{\text{amb}} = 25^\circ\text{C}.$

**Aluminium electrolytic capacitors
Solid Al, Radial Pearl Miniature**

128 SAL-RPM

SPECIFIC TESTS AND REQUIREMENTS

General tests and requirements are specified in data handbook PA01, section "Tests and Requirements".

Table 3 Test procedures and requirements

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ CECC 30300 subclause 4.13	$T_{amb} = 125 \text{ }^{\circ}\text{C}$; $U_R = 6.3 \text{ to } 25 \text{ V}$ with U_R applied; $U_R = 35 \text{ and } 40 \text{ V}$ with U_C applied; 10000 hours	$\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30302 subclause 1.8.1	$T_{amb} = 125 \text{ }^{\circ}\text{C}$; I_R applied and: $U_R = 6.3 \text{ to } 25 \text{ V}$ with U_R applied; $U_R = 35 \text{ and } 40 \text{ V}$ with U_C applied; 20000 hours	$\Delta C/C: \pm 15\%$ $\tan \delta \leq 1.5 \times \text{spec. limit}$ $Z \leq 1.5 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: <1%
Shelf life (storage at high temperature)	IEC 60384-4/ CECC 30302 subclause 4.17	$T_{amb} = 125 \text{ }^{\circ}\text{C}$; no voltage applied; 500 hours	$\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1 \times \text{spec. limit}$
Charge and discharge	IEC 60384-4-2 subclause 9.21	10^6 cycles without series resistance: 0.5 s to U_R ; 0.5 s to ground	$\Delta C/C: \pm 5\%$ no short or open circuit, no visible damage
Solvent resistance	IEC 60068-2-45 test XA IEC 60653	immersion: 5 ± 0.5 minutes with or without ultrasonic at $55 \pm 5 \text{ }^{\circ}\text{C}$ solvents: demineralized water and/or calgonite solution (20 g/l)	visual appearance not affected

**Aluminium electrolytic capacitors
Solid Al, Radial Pearl Miniature**

128 SAL-RPM

TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Extended vibration	IEC 60068-2-6 test Fc	10 to 2000 Hz; 1.5 mm or 20 g; 1 octave/minute; 3 directions; 1 sweep per direction; no voltage applied	no intermittent contacts no breakdown no open circuiting no mechanical damage $\Delta C/C: \pm 5\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1.5 \times \text{spec. limit}$
Shock test	IEC 60068-2-27 test Ea	half-sine or sawtooth pulse shape; 50 g; 11 ms; 3 successive shocks in each direction of 3 mutually perpendicular axes; no voltage applied	no intermittent contacts no breakdown no open circuiting no mechanical damage $\Delta C/C: \pm 5\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1.5 \times \text{spec. limit}$
Passive flammability test	IEC 60695-2-2	capacitor mounted to a vertical printed-circuit board, one flame on capacitor body; $T_{amb} = 20 \text{ to } 25^\circ\text{C}$; test duration = 20 s	after removing the test flame from the capacitor, the capacitor must not continue to burn for more than 15 s; no burning particles must drop from the sample

CAUTION

CLEANING SOLVENTS, ADHESIVES, COATING MATERIALS

Some cleaning agents, adhesives or coating materials have an adverse affect on electrolytic capacitors.

For cleaning, varnishing, coating, lacquering, embedding or gluing at the capacitor's sealing, ensure that the materials used are halogen-free in all their constituent parts (base material, thinners, binders, reacting agents, propellants, additives).

For further information regarding the correct use of electrolytic capacitors, please refer to data handbook PA01, section "Application guidelines".

**Aluminium electrolytic capacitors
Solid Al, Radial Pearl Miniature****128 SAL-RPM****DEFINITIONS**

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Customers of BC Components who are using or selling these products for use in such applications do so at their own risk and agree to fully indemnify BC Components for any damages resulting from such improper use or sale.