

PQ015YZ5MZ Series/ PQ015YZ01Z Series

■ Features

1. Low voltage operation (Minimum operating voltage:1.7V)
1.8V input → available 1.0 to 1.5V.
2. SC-63 package.

■ Applications

1. Peripheral equipment of personal computers.
2. Power supplies for various electronic equipment such as DVD player or STB.

■ Model Line-up

Output current (I _O)	Package type	Variable output
0.5A	Taping	PQ015YZ5MZP
	Sleeve	PQ015YZ5MZZ
1A	Taping	PQ015YZ01ZP
	Sleeve	PQ015YZ01ZZ

■ Absolute Maximum Ratings

(T_a=25°C)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V _{IN}	3.7	V
*1 Bias supply voltage	V _B	7	V
*1 Output adjustment terminal voltage	V _{ADJ}	5	V
Output current	I _O	0.5	A
		1	
*2 Power dissipation	P _D	8	W
*3 Junction temperature	T _j	150	°C
Operating temperature	T _{opr}	-25 to +85	°C
Storage temperature	T _{stg}	-40 to +150	°C
Soldering temperature	T _{sol}	260 (10s)	°C


*1 All are open except GND and applicable terminals

*2 P_D:With infinite heat sink*3 Overheat protection may operate at the condition T_j=125°C to 150°C

SC-63 Package, Low Voltage Operation Low Power-loss Voltage Regulator

■ Outline Dimensions

(Unit : mm)

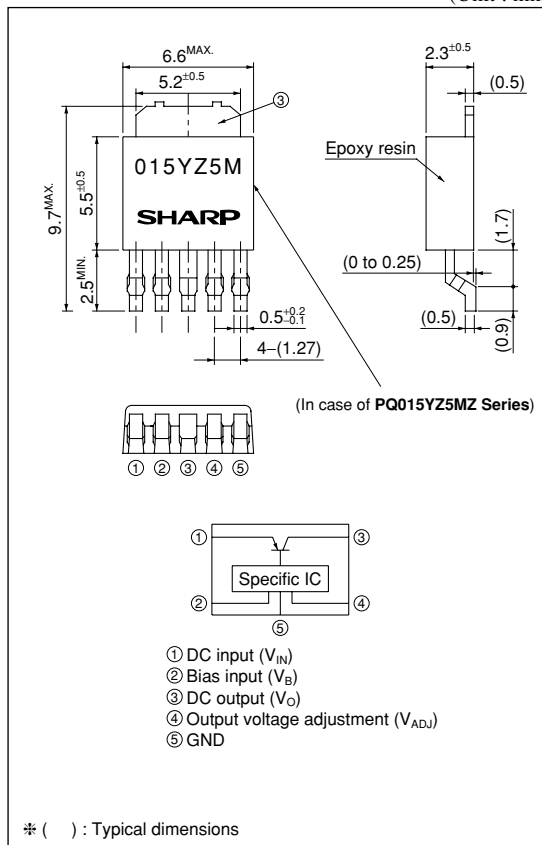

■ Electrical Characteristics

(Unless otherwise specified, condition shall be $V_{IN}=1.8V$, $V_B=3.3V$, $V_O=1.2V$ ($R_1=1k\Omega$), $I_O=0.3A$, $T_a=25^\circ C$, (**PQ015YZ5MZ**))

(Unless otherwise specified, condition shall be $V_{IN}=1.8V$, $V_B=3.3V$, $V_O=1.2V$ ($R_1=1k\Omega$), $I_O=0.5A$, $T_a=25^\circ C$, (**PQ015YZ01Z**))

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input voltage range		V _{IN}	—	1.7	—	3.7	V
Bias voltage		V _B	—	2.35	—	7	V
Output voltage		V _O	—	1.0	—	1.5	V
Load regulation	PQ015YZ5MZ	R _{eg} L	I _O =5mA to 0.5A	—	0.2	1	%
	I _O =5mA to 1A						
Line regulation		R _{eg} I	V _{IN} =1.7 to 3.7V, V _B =2.35 to 7V, I _O =5mA	—	0.2	1	%
Ripple Rejection		RR1	Refer to Fig.2	—	65	—	dB
		RR2	Refer to Fig.3	—	60	—	dB
Reference voltage		V _{ref}	—	0.97	1.0	1.03	V
Reference voltage temperature coefficient		T _C V _{ref}	T _j =0 to 125°C, I _O =5mA	—	±0.5	—	%
Bias in flow current		I _B	—	—	1.5	3	mA

Fig.1 Standard Test Circuit

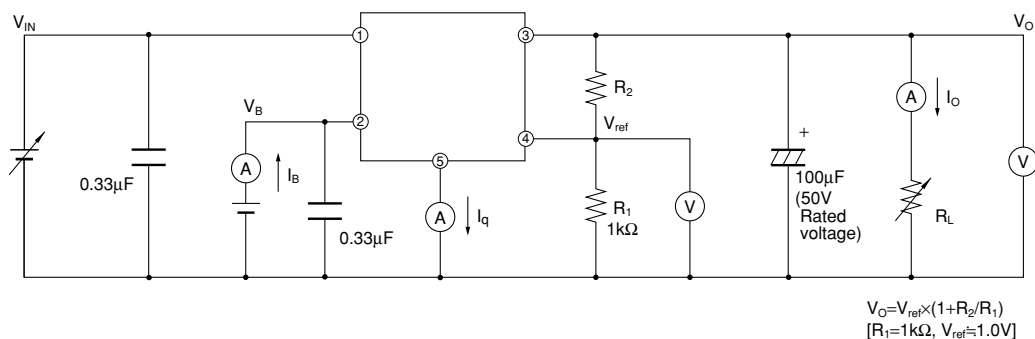


Fig.2 Test Circuit for Ripple Rejection

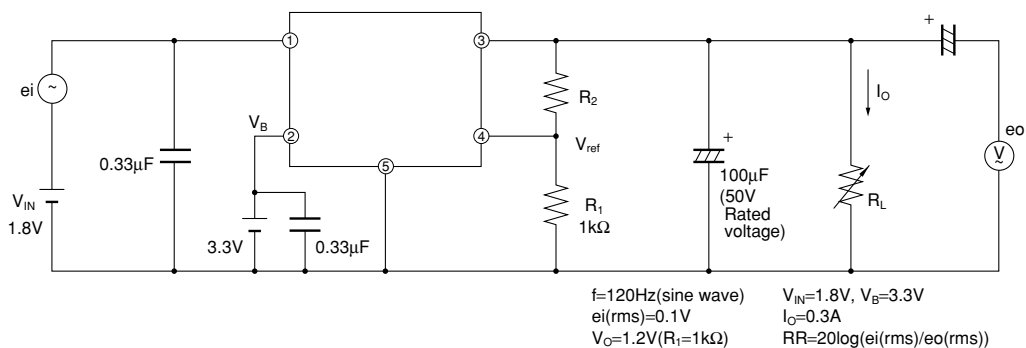


Fig.3 Test Circuit for Ripple Rejection


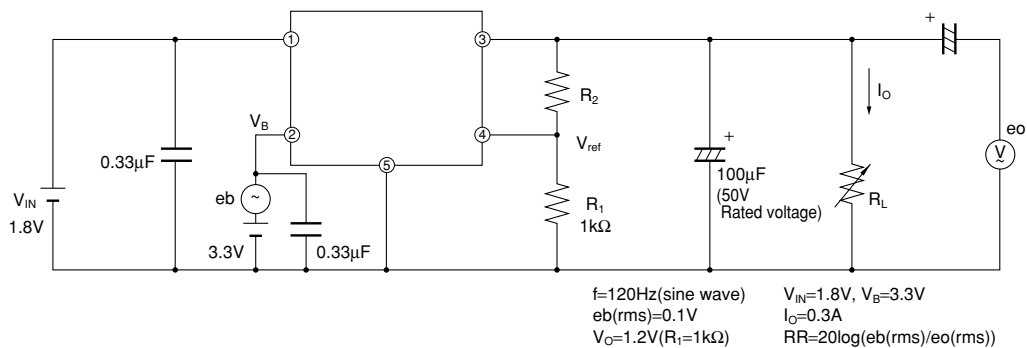


Fig.4 Internal Dissipation vs. Ambient Temperature

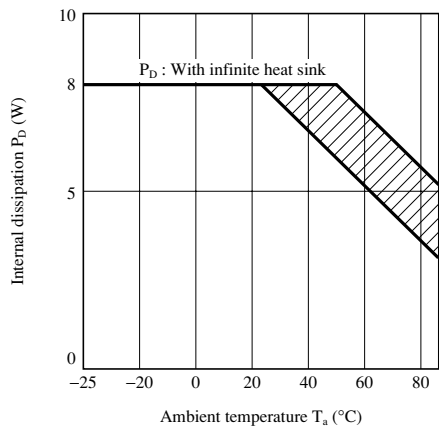

Note) Oblique line prtion: Overheat protection may operate in this area

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.