



UM3491

Melody Generator With Accompaniment

Features

- 1.5V operating voltage for speaker application.
- 3V operating voltage for piezo application.
- 1024-note memory; up to 16 can be selected tunes.
- Dual tone mixed output; 2 individual external envelope circuits
- RC oscillator with one external resistor
- 31 programmable tones (include rest) from $C_4 \sim F_7$
- 15 programmable tempos
- 16 programmable time segments for note arrangement
- N^+ programming
- Pulse signal output when melody ends
- Low stand-by current
- Single song played repeatedly or auto stop
- All songs played repeatedly or auto stop
- Any song can be preset

General Description


The UM3491 series comprises mask-ROM-programmed melody generators with accompaniment implemented through CMOS technology. They are designed to play melodies according to previously programmed information.

melody and accompaniment which are mixed together to generate simultaneous output.


The devices also include 2 individual pre-amplifiers for

The UM3491 series is intended for applications such as toys, doorbells, melody clock/timers, etc.

Pin Configuration

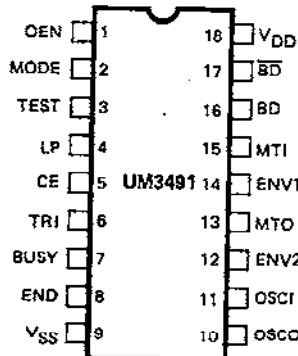

Block Diagram

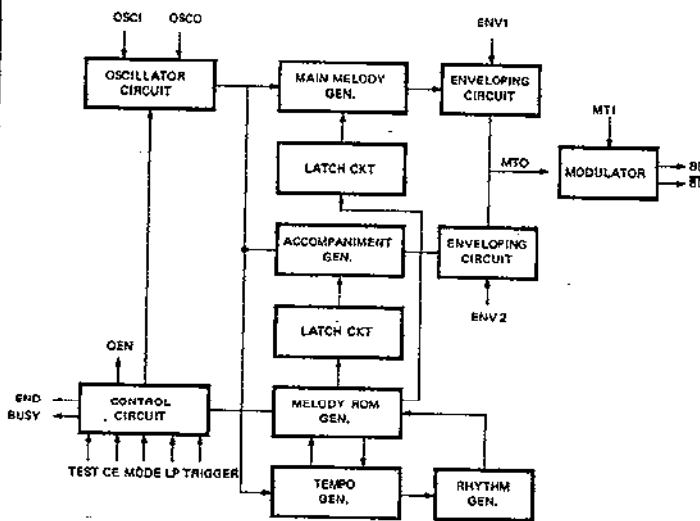



Absolute Maximum Ratings*

Supply Voltage -0.3V to +5.0V
 Applied Voltage at any Pin
 $V_{SS} - 0.3V$ to $V_{DD} + 0$
 Ambient Temperature under Bias -10°C to 60°C
 Storage Temperature -55°C to 125°C

***Comments**

Stress above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only. Functional operation of this device at these or any other conditions above those indicated in the operational sections of this specification is not implied and exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics

($V_{SS} = 0V$, $T_A = 25^\circ C$, $F_{OSC} = 64KHz$, unless otherwise specified.)

Parameter	Symbol	Min.	Typ.	Max.	Condition
Operating Voltage	V_{DD}	1.35V	3V	5V	
Stand-by Current	I_{STB}	--	--	1µA	$V_{DD} = 3V$ osc halting
Operating Current	I_{OD}	--	2mA	5mA	$V_{DD} = 3V$, No load
BD Drive Current	I_{BD}	1mA	--	--	$V_{DD} = 3V$, $V_{OH} = 1.5V$ MTI = 0V
BD Sink Current	I_{BS}	1mA	--	--	$V_{DD} = 3V$, $V_{OL} = 1.5V$ MTI = 3V
\overline{BD} Drive Current	I_{BDB}	1mA	--	--	$V_{DD} = 3V$, $V_{OH} = 1.5V$ MTI = 0V
\overline{BD} Sink Current	I_{BSB}	1mA	--	--	$V_{DD} = 3V$, $V_{OL} = 1.5V$ MTI = 3V
Frequency Deviation per lot	$\Delta F/F$	-10%	--	+10%	$V_{DD} = 3V$
Frequency Stability	$\Delta F/F$	--	--	20%	$\frac{F_{OSC} (3.3V) - F_{OSC} (2.7V)}{F_{OSC} (2.7V)}$
END Drive Current	I_{END}	100µA	--	--	$V_{DD} = 2V$, $V_{END} = 1.1V$
Busy Drive Current	I_{BUSY}	100µA	--	--	$V_{DD} = 2V$, $V_{BUSY} = 1.1V$




Pin Description

Pin No.	Designation	Description
1	OEN	No connection
2	MODE	The melody will be repeated if this pin connected to V _{DD} The melody will be stopped automatically if this pin connected to V _{SS}
3	TEST	This pin is used for testing; in normal operation it should be open
4	LP	Only one song is played if this pin connected to V _{DD} All songs are played if this pin connected to V _{SS}
5	CE	Chip enable if connected to V _{DD} Chip disable if connected to V _{SS}
6	TRI	A positive going edge applied to this pin will change the melody to the next song
7	BUSY	This output is high during stand-by and low during melody output
8	END	This pin provides a positive pulse output after the melody stops. The output is low otherwise
9	V _{SS}	Negative supply power
10	OSCO	RC oscillator pin or inverted clock output
11	OSCI	RC oscillator pin
12	ENV2	Enveloping circuit terminal
13	MTO	Modulated tone signal output
14	ENV1	Enveloping circuit terminal
15	MTI	Modulated tone signal input
16	BD	Tone signal output 1
17	$\overline{\text{BD}}$	Tone signal output 2
18	V _{DD}	Positive power supply


Application Circuit

1. FOR PIEZO

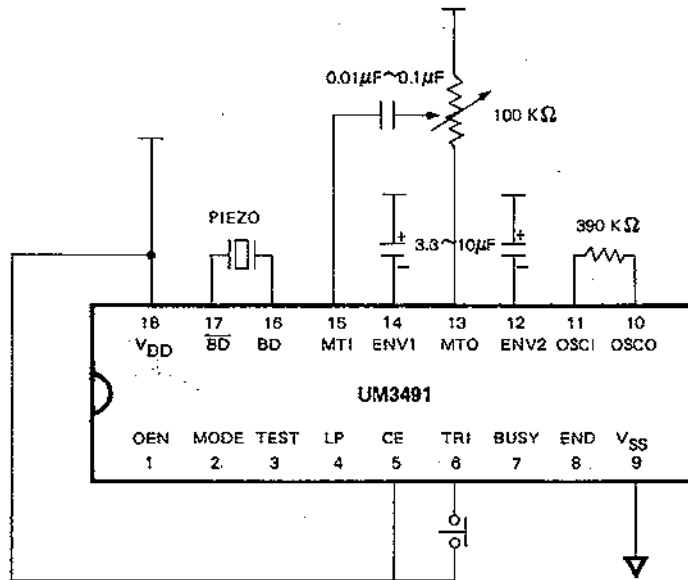




2. FOR SPEAKER

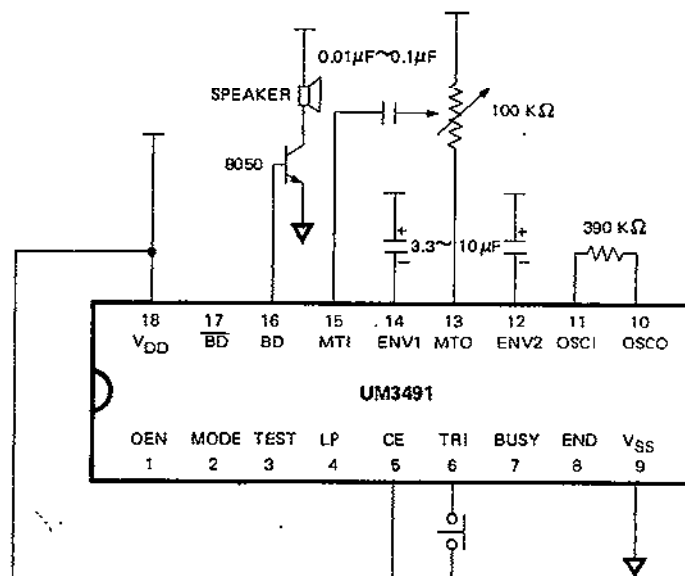

Bonding Diagram

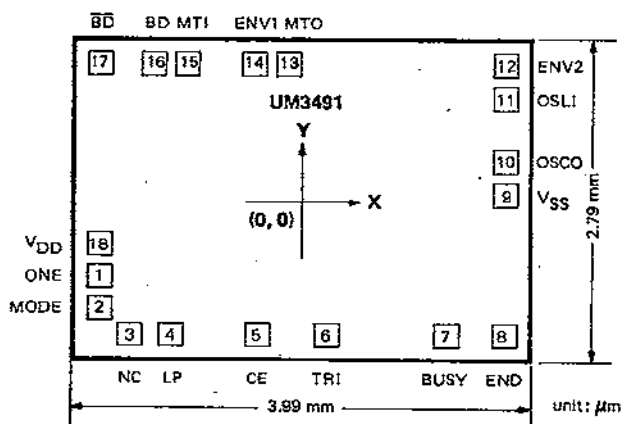

Pad No.	Designation	X	Y
1	OEN	-1811	-702
2	MODE	-1813	-965
3	NC	-1615	-1164
4	LP	-1219	-1220
5	CE	-507	-1220
6	TRI	39	-1248
7	BUSY	1395	-1240
8	END	1785	-1222
9	V _{SS}	1801	-10
10	OSCO	1801	198
11	OSCI	1801	990
12	ENV2	1801	1190
13	MTO	-331	1208
14	ENV1	-531	1208
15	MTI	-1071	1208
16	BD	-1349	1184
17	BD	-1720	1184
18	V _{DD}	-1811	-496