


© MPE-GARRY

SMD pin headers horizontal mount with 2,54 mm pitch, gull-wing terminations and 0,64 mm square pins. Mixed contact arrangements available upon request.

Pitch (mm)	2,54
Mating contact size	sq. 0,64
No of contacts	10
Positioning peg	without
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Selective Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	250 V _{RMS} / V _{DC} Please consider air- and creepage distances
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Reel
Cap	With cap
A (Length)	18,50
B (Mating)	8,13
C (PCB side)	7,87

Double row.

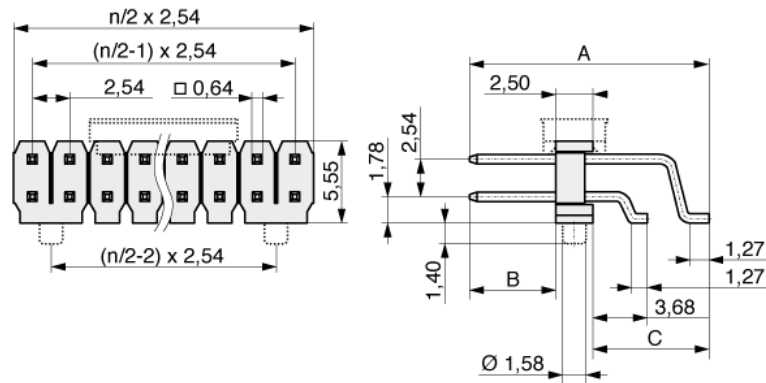

Footprint

