
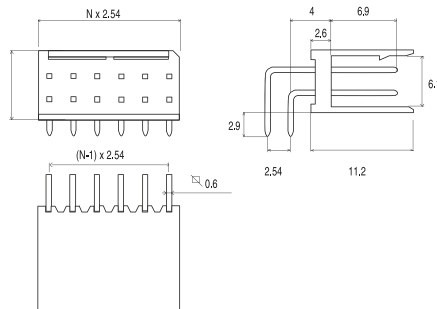


- Features** Polarized header with friction lock
Pitch 2.54 mm
- Material** Insulator:
Black thermoplastic GF UL 94V0
Contact: Phosphor bronze
- Electrical** Current rating: 4 A maxi
Dielectric withstanding
Insulation resistance: 1000 MΩ mini
- Mechanical** Temperature rating:
-40 °C to 125 °C
- Packaging** Recyclable cardboard boxes

Product Code

A	B	C	D	E	F
476	0395	1	xx	4x0	-1

- D** Number of contacts from 02 to 20
- E** Plating
0 Gold 0.2 μm over Ni 1.27 μm
4 Tin 4 μm over Ni 1.27 μm
7 Selective Gold 0.2 μm over Ni 1.27 μm
Other platings on demand

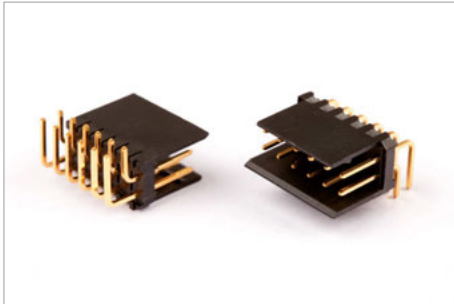

- Features** Polarized header with friction lock
Pitch 2.54 mm
- Material** Insulator:
Black thermoplastic GF UL 94V0
Contact: Phosphor bronze
- Electrical** Current rating: 4 A maxi
Dielectric withstanding: 500 V AC
Insulation resistance: 1000 MΩ mini
- Mechanical** Temperature rating:
-40 °C to 125 °C
- Packaging** Recyclable cardboard boxes

Product Code

A	B	C	D	E	F
476	2075	1	xx	4x0	-1

- D** Number of contacts from 04 to 26
- E** Plating
0 Gold
0.2 μm over Ni 1.27 μm
4 Tin 4 μm over Ni 1.27 μm
7 Selective Gold 0.2 μm over Ni 1.27 μm
Other platings on demand.

“Due to technical progress, all design, specification and components are subject to change without notice”.