


Pitch (mm)	1,27
Mating contact size	sq. 0,46
No of contacts	36
Polarising	No
Locking	No
Material contact	Copper alloy
Plating contact	Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	500 V _{RMS} for 1 minute
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
A (Length)	10,42
B (Mating)	4,83
C (PCB side)	3,05
L	2,54

Vertical pin headers with 1,27 mm pitch and 0,46 mm square pins. Different pin length and plating options available.

Zweireihig

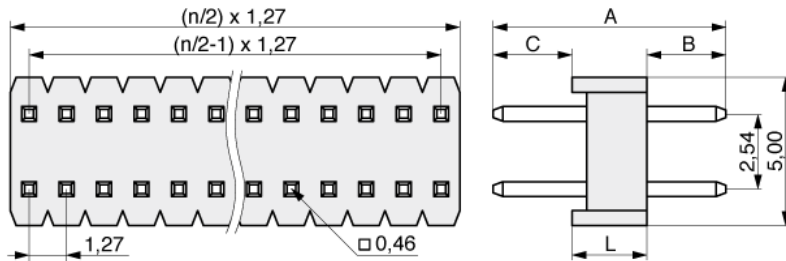

Footprint:

