




1

2


3

4

5

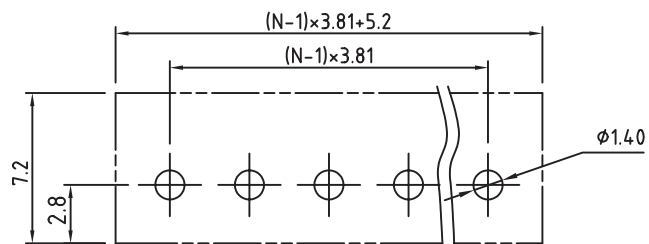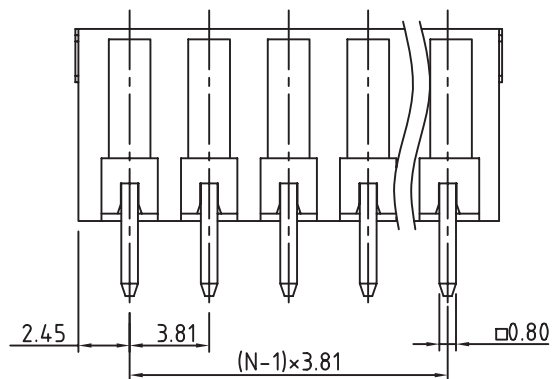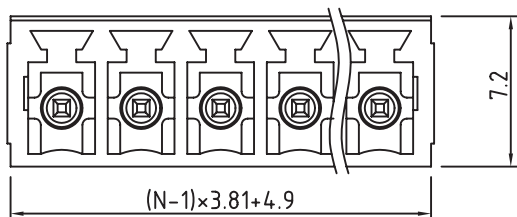

PCB LAYOUT - COMPONENT VIEW

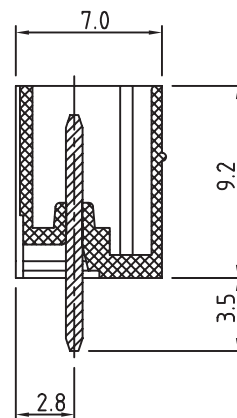

## TECHNICAL CHARACTERISTICS

MATERIAL  
 INSULATOR: PA66  
 FLAMABILITY RATING: UL94-V0  
 COLOR: GREEN  
 CONTACT PIN: BRASS (CuZn)  
 SOLDER TAIL PLATING: TIN

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -40 UP TO 105°C  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	cULus	VDE
CURRENT RATING:	10A	10.5A
WORKING VOLTAGE:	300VAC	300VAC
WITHSTANDING VOLTAGE:	1.6KV	2.5KV
CONTACT RESISTANCE:	20 mOhm MAX	

MECHANICAL  
 PITCH: 3.81MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX


SERIE 321

CERTIFICATION



RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



APPROVAL: RJ

UNIT: MM

DESCRIPTION: SERIE 321 - 3.81MM VERTICAL PCB HEADERS WR-TBL

SIZE

29-OCT-08

CHARACTERISTICS

JP

SCALE:

WERI PART NO: 691 321 300 0xx

A4

31-OCT-07

PDF

EC

DRAW: MARVIN

REV

DATE

FILE

BY