



PLATING CONTACT AREA:

DASH NR:	PERFORMANCE LEVEL
-1W	TELCORDIA CO
-2W	CUSTOMER SPECIAL
-3W	CUSTOMER SPECIAL
-4W	CUSTOMER SPECIAL
-5W	TELCORDIA CO
-2W1F	CUSTOMER SPECIAL
-3W1F	TELCORDIA CO
-1W1F	TELCORDIA CO
-3W1F	CUSTOMER SPECIAL



OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE

PC BOARD VERSIONS

PRODUCTNR:	PCB THICKNESS	DIM"A"
70231-X01LF	1.6	2.90
70231-X11LF	2.4	3.53

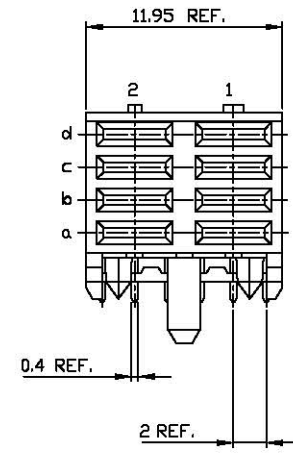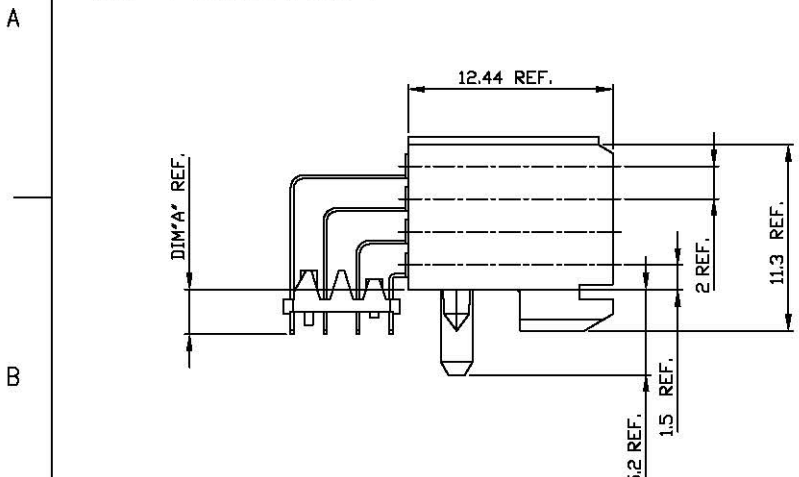

PRODUCT AFTER HOT RIVETTING.

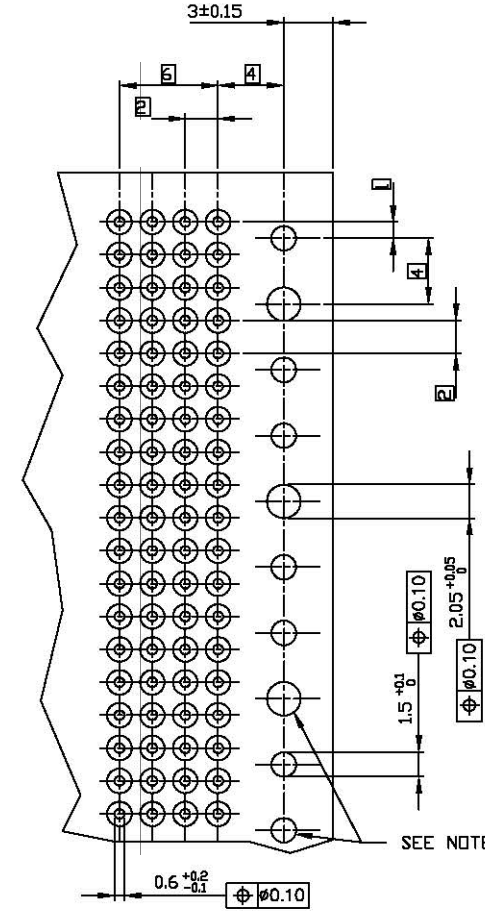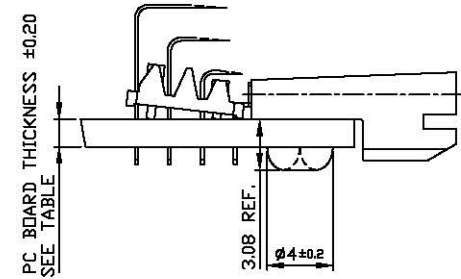

RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

- NOTES:
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 INDICATED HOLES ARE UNPLATED.
 - 4 PRODUCT MARKING: PARTNUMBER & BATCH ID.
 - 5 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - 6 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
 - 7 THE PRODUCT SPECIFICATION GS-12-453.



Copyright FCI.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI				
ltr	ecn no	dr	date	linear	0.X	±0.30	projection	title	www.fciconnect.com			
G	V70769	DDB	1997-06-02		0.XX	±0.15						
H	V00578	LLA	2000-03-16		0.XXX	±0.05						
J	V00847	LLA	2000-05-30	angles	D' ±2'			RA FEMALE POWER STB 12MM VERSION product family METRAL size dwg no scale 5:1	code			
K	DG05-0107	DLU	2005-05-10	dr	R.TRLPPE	1990-09-18				A2	70231	sheet 1 of 2
L	DG07-0458	CEW	2007-11-15	enr	BOUWNEGHT	1990-09-18						
M	NI1-0131	AZH	2011-05-09	chr	VAN ZANTEN	1990-09-18						
N	ELX-N-004384	AZH	2011-07-20	appd	VAN ZANTEN	1990-09-18						
sheet index	revision	N										
	sheet	1-2										

1

2

3


4

PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1WY	TELCORDIA CO
-2WY	CUSTOMER SPECIAL
-3WY	CUSTOMER SPECIAL
-4WY	CUSTOMER SPECIAL
-5WY	TELCORDIA CO
-6WY	CUSTOMER SPECIAL
-7WY	TELCORDIA CO
-8WY	TELCORDIA CO
-1WYF	TELCORDIA CO
-2WYF	CUSTOMER SPECIAL
-3WYF	CUSTOMER SPECIAL


OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM*A*
70231-X02LF	1.6	2.90
70231-X12LF	2.4	3.53

14.64 REF. SEE NOTE 6

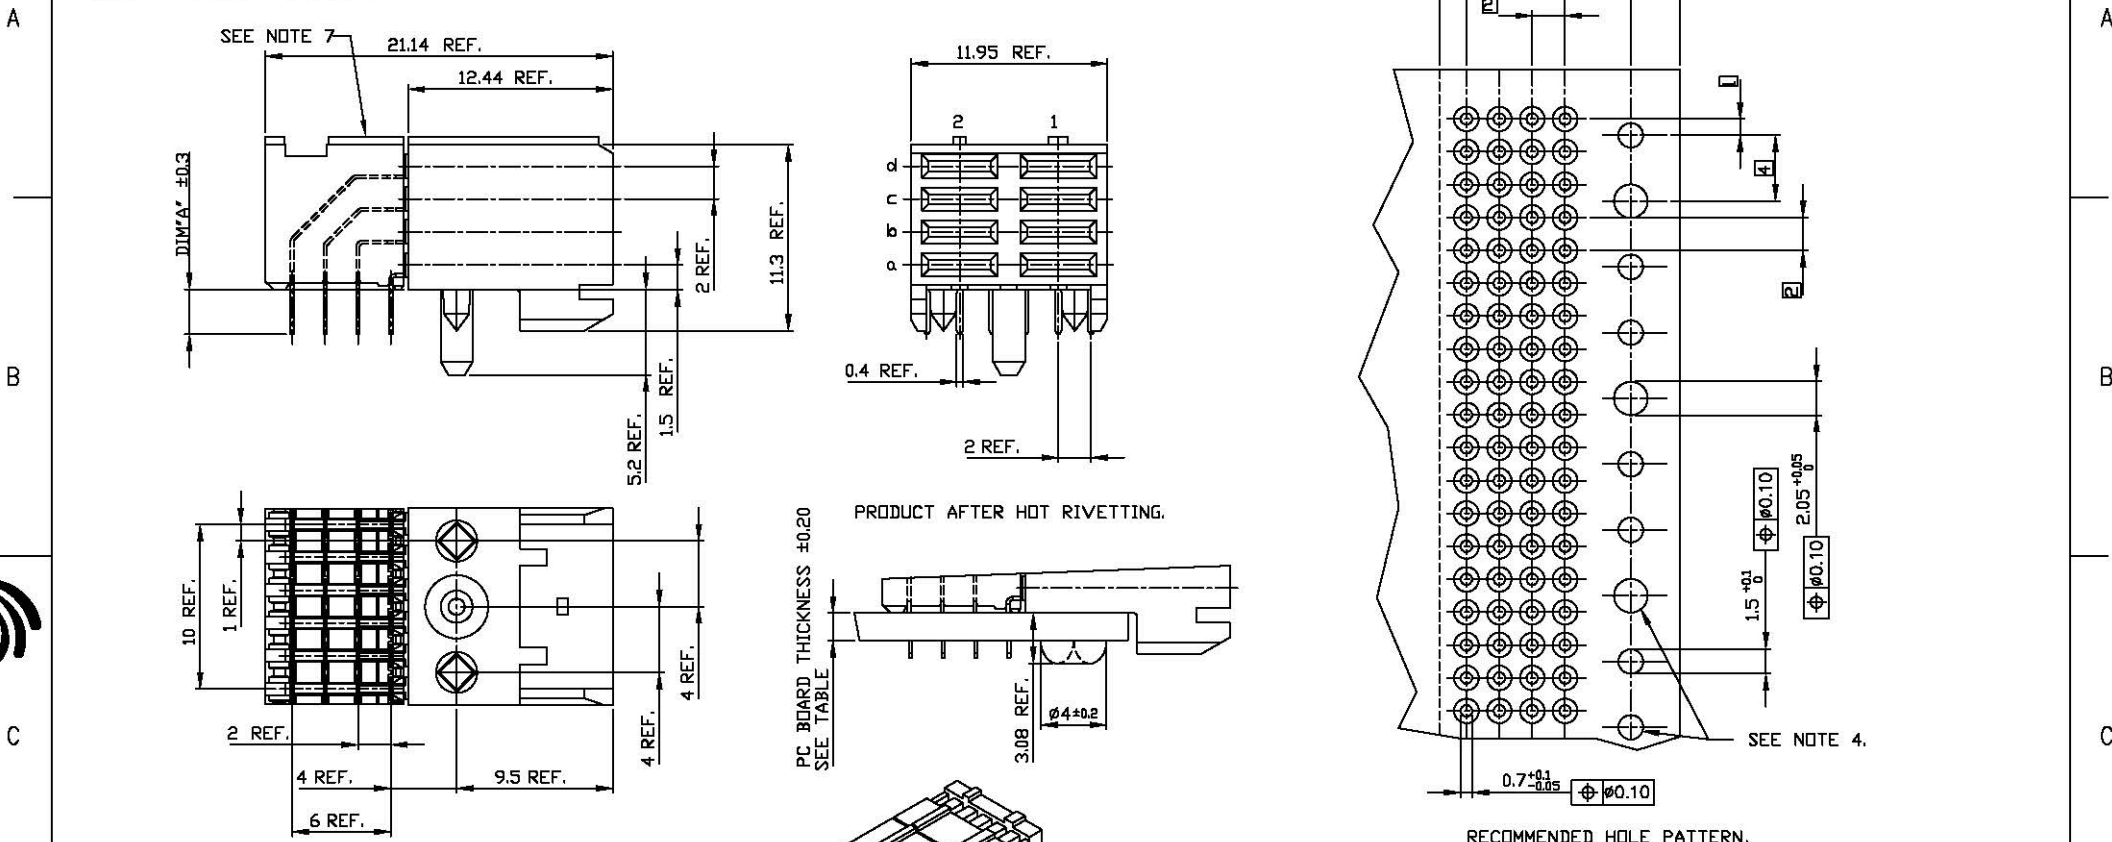

- NOTES:**
- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
 - 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - 3 INDICATED HOLES ARE UNPLATED.
 - 4 PRODUCT MARKING: PARTNUMBER & BATCH ID.
 - 5 SET BACK FOR PRESS BLOCK.
 - 6 TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
 - 7 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
 - 8 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
 - 9 THE PRODUCT SPECIFICATION GS-12-453.



mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		FCI		www.fclconnect.com	
ltr	ecn no	dr	date	linear	0.X ±0.30		projection	title				
N	ELX-N-004584	AZH	2011-07-20		0.XX ±0.15			RA FEMALE POWER STB 12MM VERSION				
					0.XXX ±0.05			product family METRAL				
				angles	0° ±2°		MM	size		code		
				dr	R.TRLPPE	1990-09-18		dwg no				
				enrg	BOUWKNEGT	1990-09-18		A2		70231		
				chr	VAN ZANTEN	1990-09-18		scale		sheet		
				appd	VAN ZANTEN	1990-09-18	5:1		2 of 2			
sheet index	revision sheet	N	1-2									



Copyright FCI.

REV F - 2008-04-17

1

2

3

4

PDS: Rev :N

STATUS:Released

Printed: Jul 20, 2011