


Item no.: 723-603/019-042

Product description: MALE CONNECTOR WITH FIXING FLANGE 3 POLE PIN SPACING 7.5 MM / 0.295 IN 100% PROTECTED AGAINST MISMATING WITH PRECEDING EARTH CONTACT CAGE CLAMP®CONNECTION FOR SCREW OR SIMILAR MOUNTING TYPES FOR PARALLEL OR PERPENDICULAR MOUNTING

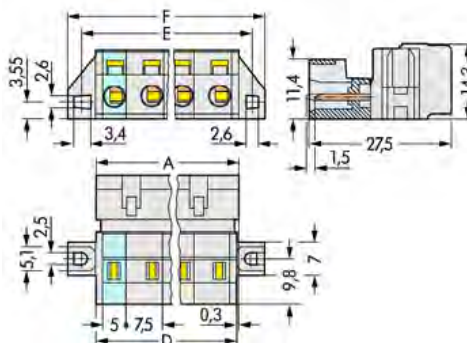

Packing unit 50 pieces

Product group	3 (Multi Conn. System)
Pin spacing from	7,5 mm
Pin spacing from	0,295 in
pole count	3
Cross section from [mm <sup>2</sup> ]	0,08 mm <sup>2</sup>
Cross section to [mm <sup>2</sup> ]	2,5 mm <sup>2</sup>
Cross section from [AWG]	28 AWG
Cross section to [AWG]	12 AWG
Connection method	CAGE CLAMP®CONNECTION
Measured voltage EN	400 V
Measured shock voltage	6 kV
Pollution degree	3
Current intensity EN	12 A
Weight	6,295 g
Color	light grey
No. of connection Points	3
No. of potentials	3
Height	14,3 mm
Height	0,563 in
Width	34,8 mm
Width	1,37 in
Depth	27,5 mm



Depth	1,083 in
Strip length from	8 mm
Strip length to	9 mm
Strip length	0,33 in



Item number	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [ mm <sup>2</sup> ]
723-603/019-042	ABS	04-HG469925-PDA	400	12	0,8-2,5
723-603/019-042	BV	11915/A0	400	12	
723-603/019-042	CCA	5764	400	16	0,08-2,5
723-603/019-042	CSA	154112-1466354	300	15	22-12
723-603/019-042	DNV	E-9218	400	12	0,8-2,5
723-603/019-042	GL	17296-00HH	400	12	
723-603/019-042	KEMA	2083746.02	400	16	0,08-2,5
723-603/019-042	KR	HMB05880-EL003	250/400	8/12	1,5
723-603/019-042	LR	96/20035	400	12	0,8-2,5
723-603/019-042	NEMKO	P94101840	400		2,5
723-603/019-042	RMR	11130002	400	12	0,8-2,5
723-603/019-042	UR	E45171	600	15	12
723-603/019-042	UR	E45172	300/150/300	15/15/10	22-12

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected