




defining a degree of excellence

5 TAP LEADING EDGE CONTROL STANDARD DELAY MODULES

Cat 5-R7

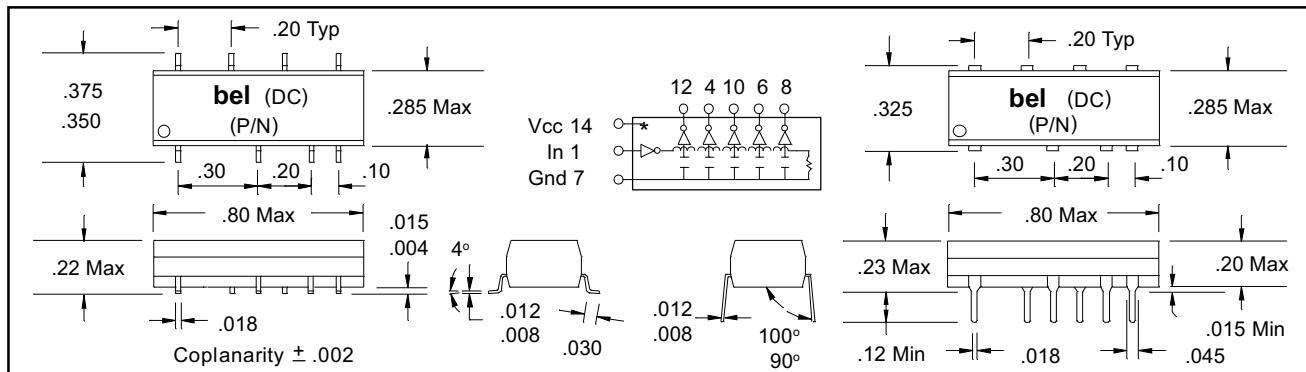

Part Numbers

SMD	Thru-Hole	Total Delay	Delay per Tap	Rise Time
S422-0025-02	A447-0025-02	25 ns	5 ns	3 ns
S422-0030-02	A447-0030-02	30 ns	6 ns	3 ns
S422-0040-02	A447-0040-02	40 ns	8 ns	3 ns
S422-0050-02	A447-0050-02	50 ns	10 ns	3 ns
S422-0060-02	A447-0060-02	60 ns	12 ns	3 ns
S422-0070-02	A447-0070-02	70 ns	14 ns	3 ns
S422-0080-02	A447-0080-02	80 ns	16 ns	3 ns
S422-0090-02	A447-0090-02	90 ns	18 ns	3 ns
S422-0100-02	A447-0100-02	100 ns	20 ns	3 ns
S422-0125-02	A447-0125-02	125 ns	25 ns	3 ns
S422-0150-02	A447-0150-02	150 ns	30 ns	3 ns
S422-0200-02	A447-0200-02	200 ns	40 ns	3 ns
S422-0250-02	A447-0250-02	250 ns	50 ns	3 ns


Tolerances

Input to Taps ± 2 ns or 5% , Whichever is Greater
 Tap to Tap ± 2 ns or 7% , Whichever is Greater
 Delays measured @ 1.5 V levels on Leading Edge only
 with no loads on Taps
 Rise and Fall Times measured from 0.75 V to 2.4 V levels

Drive Capabilities

Nh	Logic 1 Fanout	-	20 TTL Loads Max.
NI	Logic 0 Fanout	-	10 TTL Loads Max.

Recommended Temperature Profile

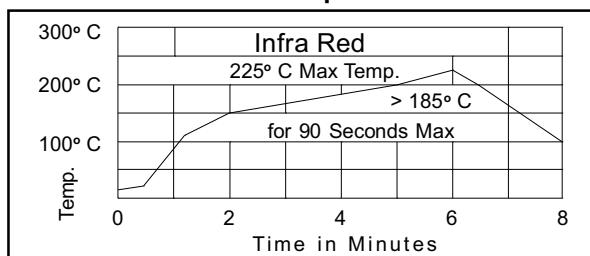

Test Conditions @ 25°C

Ein	Pulse Voltage	3.2 Volts
Trin	Rise Time	3.0 ns (10%-90%)
PW	Pulse Width	1.2 x Total Delay
PP	Pulse Period	4 x Pulse Width
Icll	Supply Current	35 ma Typical
Vcc	Supply Voltage	5.0 Volts

Electrical Characteristics

	Min.	Max.	Units
Vcc Supply Voltage	4.75	5.25	V
Vih Logic 1 Input Voltage	2.0		V
Vil Logic 0 Input Voltage		0.8	V
Ioh Logic 1 Output Current		-1	ma
Iol Logic 0 Output Current		20	ma
Voh Logic 1 Output Voltage	2.7		V
Vol Logic 0 Output voltage		0.5	V
Vik Input Clamp Voltage		-1.2	V
Iih Logic 1 Input Current		20	ua
Iil Logic 0 Input Current		-0.6	ma
Ios Short Circuit Output Current	-60	-150	ma
Icch Logic 1 Supply Current		25	ma
Icll Logic 0 Supply Current		40	ma
Ta Operating Free Air Temperature	0°	70°	C
PW Min. Input Pulse Width of Total Delay	40		%
d Maximum Duty Cycle		50	%
Tc Temp. Coeff. of Total Delay (TD)	100 + (25000/TD)	PPM/°C	

Notes

Transfer molded for better reliability
 Compatible with TTL & DTL circuits
 Terminals: Electro-Tin plate phosphor bronze
 Performance warranty is limited to specified parameters listed
 SMD - Tape & Reel available:
 32mm Wide x 16mm Pitch, 500 pieces per 13" reel

Other Delays and Tolerances Available Consult Sales

Specifications subject to change without notice.

Corporate Office

Bel Fuse Inc.
 198 Van Vorst Street, Jersey City, NJ 07302-4496
 Tel: 201-432-0463
 Fax: 201-432-9542
 E-Mail: BelFuse@belfuse.com
 Internet: <http://www.belfuse.com>

Far East Office

Bel Fuse Ltd.
 8F/8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel: 852-2328-5515
 Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Preston PR1 8UD
 Lancashire, U.K.
 Tel: 44-1772-556601
 Fax: 44-1772-888366