


AK(Z) 950

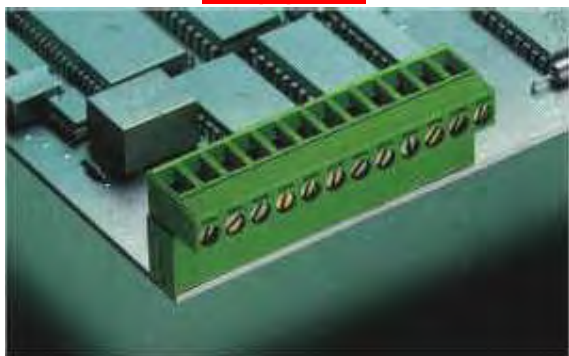

AK(Z) 950/.. - 5,0 (5,08) - green

2-24 poles, Spacing 5,0 mm or 5,08 mm
insert required no. of poles ..

Ratings:



UL 1059



CSA 22.2 No.158 DIN VDE 0627



Rated Voltage	250 VB	300 VB	250 V
Rated Current	15 A	16 A	12 A (T60)
Wire Size	AWG 22-12	AWG 22-14	2,5 mm²
Test Voltage			2,21 kV
Rated Torque / Screw Size			0,5 Nm/M3
Max. Rated Cross Section			
Single Wire (solid)			2,5 mm²
Stranded Wire (flexible)			2,5 mm²
Stranded wire with Ferrules			2,5 mm²


Dimensions

Spacing	5,0 mm (5,08 mm)
Stripped Length	6,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	RAL 6018

AKZ 960

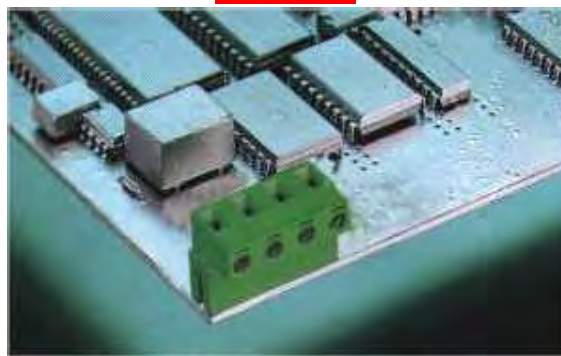

AKZ 960/.. - 7,62 - green

2-16 poles, Spacing 7,62 mm
insert required no. of poles ..

Ratings:



UL 1059



CSA 22.2 No.158 DIN VDE 0627



Rated Voltage	250 VB	300 VB	400 V
Rated Current	15 A	16 A	12 A (T60)
Wire Size	AWG 22-12	AWG 28-12	2,5 mm²
Test Voltage			3,31 kV
Rated Torque / Screw Size			0,5 Nm/M3
Max. Rated Cross Section			
Single Wire (solid)			2,5 mm²
Stranded Wire (flexible)			2,5 mm²
Stranded wire with Ferrules			2,5 mm²

Dimensions

Spacing	7,62 mm
Stripped Length	6,0 mm

Materials

Insulating Material	PA
Flammability Class	UL94 V-0
Temperature Range	-30°C/+105°C
Terminal Block	CuZn
Contact	CuSn
Colour	RAL 6018

