


Kunststoff-Abstandsbolzen

SW 6 * SW 8
Gewinde M 3 * M 4

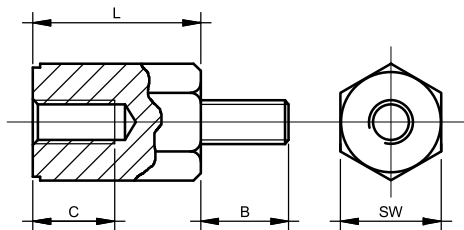

Artikel-Nr.	SW	Maße (mm)			Gewinde
		L	B	C min.	
AM 308 K	6	8	8	6	M 3
AM 310 K	6	10	8	8	M 3
AM 312 K	6	12	8	10	M 3
AM 315 K	6	15	8	10	M 3
AM 318 K	6	18	8	10	M 3
AM 320 K	6	20	8	10	M 3
AM 325 K	6	25	8	10	M 3
AM 330 K	6	30	8	10	M 3
AM 335 K	6	35	8	10	M 3
AM 340 K	6	40	8	10	M 3
AM 345 K	6	45	8	10	M 3
AM 350 K	6	50	8	10	M 3
AM 408 K	8	8	8	6	M 4
AM 410 K	8	10	8	8	M 4
AM 412 K	8	12	8	10	M 4
AM 415 K	8	15	8	10	M 4
AM 418 K	8	18	8	10	M 4
AM 420 K	8	20	8	10	M 4
AM 425 K	8	25	8	10	M 4
AM 430 K	8	30	8	10	M 4
AM 435 K	8	35	8	10	M 4
AM 440 K	8	40	8	10	M 4
AM 445 K	8	45	8	10	M 4
AM 450 K	8	50	8	10	M 4

Werkstoff: Polyamid (temperaturbeständig bis ca. 110° C)
Farbe: schwarz



Zwischenlängen und Sonderausführungen auf Anfrage

