



Siemens Matsushita Components

SAW Components Low Loss Filter for Mobile Communication

B4703
942,50 MHz

Data Sheet


Features

- Low-loss RF filter for mobile telephone EGSM system, receive path
- Low amplitude ripple
- Usable passband 35 MHz
- No matching network required for operation at 50 Ω
- Ceramic Package for **Surface Mounted Technology (SMT)**

Terminals

- Ni, gold-plated


Ceramic package DCC6

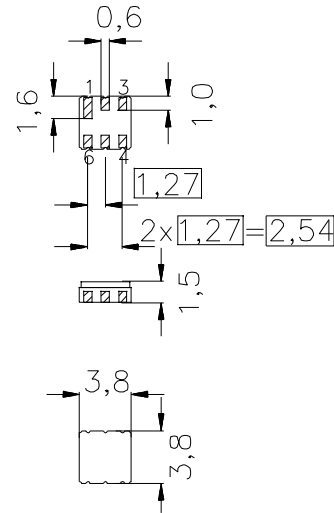

Dimensions in mm, approx. weight 0,07 g

Pin configuration

2	Input
3	Input - ground
5	Output
4	Output - ground
1,6	Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B4703	B39941-B4703-Z610	C61157-A7-A41	F61074-V8030-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Parameter	Symbol	Value	Unit	Notes
Operable temperature range	T	- 20 / + 80	°C	
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	0	V	
Input power max.	P_{IN}	20	dBm	source and load impedance 50 Ω
880...915 MHz				peak power of GSM signal,
				duty cycle 1 : 8
elsewhere		5	dBm	continuous wave



SAW Components
Low Loss Filter for Mobile Communication

B4703
942,50 MHz

Data Sheet

Characteristics

Operating temperature range: $T = +25 \pm 2^\circ \text{C}$
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	942,50	—	MHz
Maximum insertion attenuation	α_{max}	925,0 ... 960,0 MHz	—	2,3	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$	925,0 ... 960,0 MHz	—	1,0	1,8	dB
Input Return Loss		925,0 ... 960,0 MHz	10,0	11,0	—	dB
Output Return Loss		925,0 ... 960,0 MHz	9,0	10,0	—	dB
Attenuation	α	0,0 ... 880,0 MHz	15,0	18,0	—	dB
		880,0 ... 905,0 MHz	20,0	25,0	—	dB
		905,0 ... 915,0 MHz	20,0	25,0	—	dB
		980,0 ... 1000,0 MHz	20,0	27,0	—	dB
		1000,0 ... 1300,0 MHz	19,0	21,0	—	dB
		1300,0 ... 1475,0 MHz	22,0	24,0	—	dB
		1475,0 ... 1597,0 MHz	26,0	29,0	—	dB
		1597,0 ... 1710,0 MHz	30,0	33,0	—	dB
		1710,0 ... 2500,0 MHz	13,0	15,0	—	dB
		2500,0 ... 3000,0 MHz	5,0	8,0	—	dB



SAW Components
Low Loss Filter for Mobile Communication

B4703
942,50 MHz

Data Sheet

Characteristics

Operating temperature range: $T = -10$ to $+80^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

				min.	typ.	max.	
Center frequency		f_c		—	942,50	—	MHz
Maximum insertion attenuation	925,0 ... 960,0	MHz	α_{max}	—	2,7	3,5	dB
Amplitude ripple (p-p)	925,0 ... 960,0	MHz	$\Delta\alpha$	—	1,4	2,4	dB
Input Return Loss	925,0 ... 960,0	MHz		10,0	11,0	—	dB
Output Return Loss	925,0 ... 960,0	MHz		9,0	10,0	—	dB
Attenuation			α				
	0,0 ... 880,0	MHz		15,0	18,0	—	dB
	880,0 ... 905,0	MHz		20,0	25,0	—	dB
	905,0 ... 915,0	MHz		9,0	22,0	—	dB
	980,0 ... 1000,0	MHz		20,0	27,0	—	dB
	1000,0 ... 1300,0	MHz		19,0	21,0	—	dB
	1300,0 ... 1475,0	MHz		22,0	24,0	—	dB
	1475,0 ... 1597,0	MHz		26,0	29,0	—	dB
	1597,0 ... 1710,0	MHz		30,0	33,0	—	dB
	1710,0 ... 2500,0	MHz		13,0	15,0	—	dB
	2500,0 ... 3000,0	MHz		5,0	8,0	—	dB



SAW Components
Low Loss Filter for Mobile Communication

B4703
942,50 MHz

Data Sheet

Characteristics

Operating temperature range: $T = -20$ to $+80^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

				min.	typ.	max.	
Center frequency		f_c		—	942,50	—	MHz
Maximum insertion attenuation	925,0 ... 960,0	MHz	α_{max}	—	2,8	3,7	dB
Amplitude ripple (p-p)	925,0 ... 960,0	MHz	$\Delta\alpha$	—	1,5	2,5	dB
Input Return Loss	925,0 ... 960,0	MHz		10,0	11,0	—	dB
Output Return Loss	925,0 ... 960,0	MHz		9,0	10,0	—	dB
Attenuation			α				
	0,0 ... 880,0	MHz		15,0	18,0	—	dB
	880,0 ... 905,0	MHz		20,0	25,0	—	dB
	905,0 ... 915,0	MHz		9,0	22,0	—	dB
	980,0 ... 1000,0	MHz		20,0	27,0	—	dB
	1000,0 ... 1300,0	MHz		19,0	21,0	—	dB
	1300,0 ... 1475,0	MHz		22,0	24,0	—	dB
	1475,0 ... 1597,0	MHz		26,0	29,0	—	dB
	1597,0 ... 1710,0	MHz		30,0	33,0	—	dB
	1710,0 ... 2500,0	MHz		13,0	15,0	—	dB
	2500,0 ... 3000,0	MHz		5,0	8,0	—	dB




Siemens Matsushita Components

SAW Components Low Loss Filter for Mobile Communication

B4703
942,50 MHz

Data Sheet

Transfer function (spec 25° C)

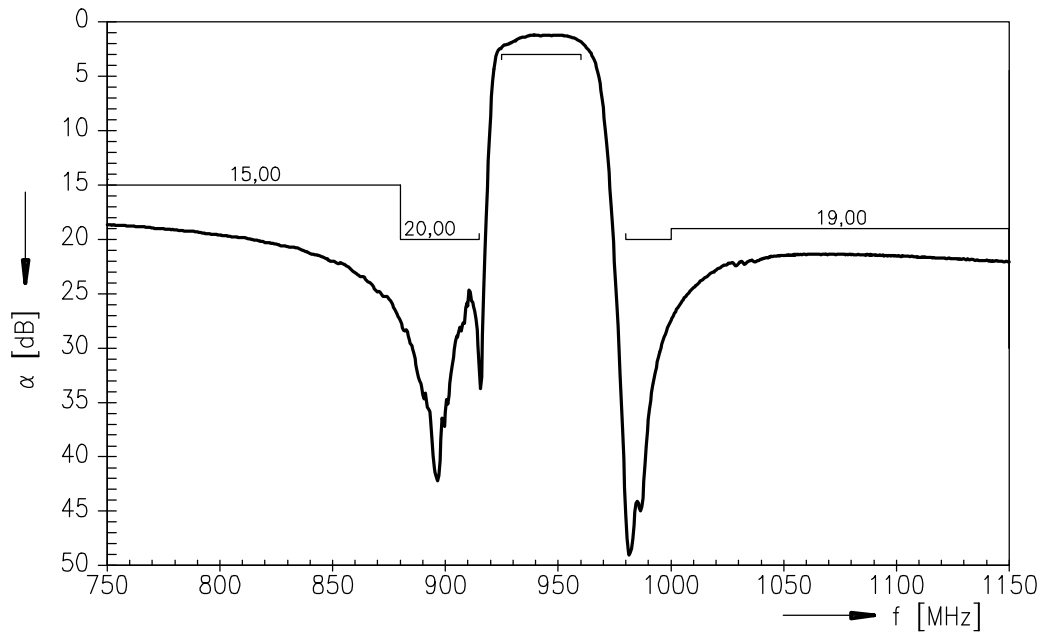

Transfer function (wideband)

