



## **Chokes and inductors**

For high frequency and EMC  
RF chokes, MCC series

**Series/Type:**            **B78108T / B78148T**

**Date:**                    November 2005

RF chokes	B78108T
MCC series	B78148T

**MCC choke (Mini Cylinder Core)**  
**Rated current 85 to 1120 mA**  
**Rated inductance 0.1 to 100  $\mu$ H**

### Construction

- Ceramic or ferrite cylinder core
- Winding: enamel copper wire
- Flame-retardant lacquer coating

### Features

- Low total height
- Low inductance
- High resonance frequency
- RoHS-compatible (see page 6)

### Applications

- RF blocking
- Decoupling and interference suppression
- For antenna systems, automotive electronics, telecommunications, entertainment electronics

### Terminals

- Central axial leads, lead-free tinned
- Radially bent to 5 mm lead spacing

### Marking


Inductance indicated by color bands to IEC 60062

### Delivery mode

Taped, Ammo and reel packing (see page 8)



### Dimensional drawings

B78108T (axial leads, taped)

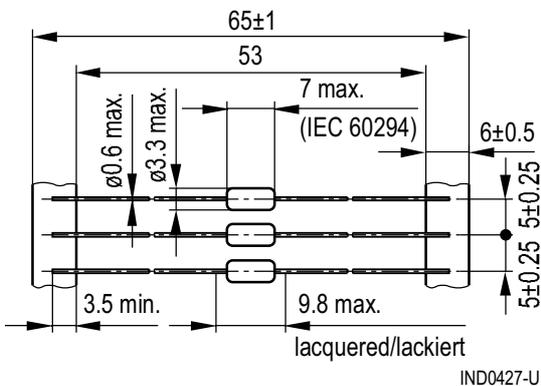


Minimum lead spacing 10 mm

Approx. weight 0.25 g

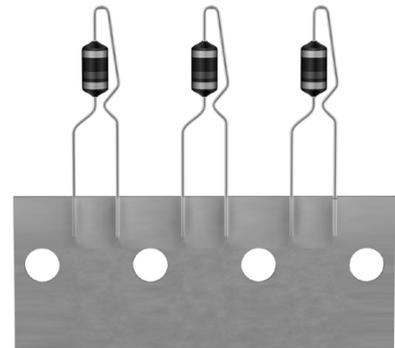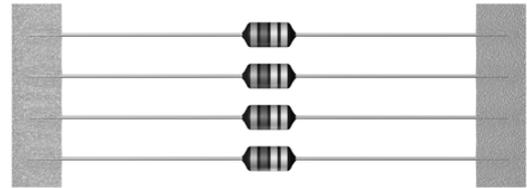

B78148T (central radial leads, taped)

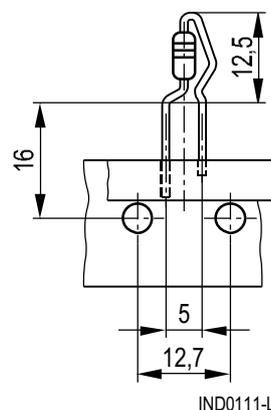

Schematic drawing (details page 8)

**Characteristics and ordering codes**

For further technical data see page 6.

$L_R$ $\mu\text{H}$	Tolerance <sup>1)</sup>	$Q_{\min}$	$f_Q$ MHz	$I_R$ mA	$R_{\max}$ $\Omega$	$f_{\text{res, min}}$ MHz	Ordering code <sup>2)</sup> (reel packing) <sup>3)</sup>
Ceramic cylinder core							
0.10	$\pm 10\%$ $\triangleq K$	40	25.2	1120	0.13	600	B781*8T3101K000
0.12		40	25.2	1080	0.145	570	B781*8T3121K000
0.15		38	25.2	1020	0.155	500	B781*8T3151K000
0.18		35	25.2	1000	0.17	460	B781*8T3181K000
0.22		35	25.2	990	0.195	420	B781*8T3221K000
0.27		35	25.2	910	0.215	380	B781*8T3271K000
0.33		35	25.2	830	0.24	330	B781*8T3331K000
0.39		35	25.2	790	0.27	300	B781*8T3391K000
0.47		35	25.2	750	0.315	280	B781*8T3471K000
0.56		35	25.2	700	0.34	260	B781*8T3561K000
0.68		35	25.2	530	0.48	240	B781*8T3681K000
0.82		35	25.2	500	0.55	230	B781*8T3821K000

1) Closer tolerances upon request.

2) Replace the asterisk \* by code number »0« for axial taping or by »4« for radial taping.

3) For Ammo pack the last digit has to be a »9«. Example: B78108T3101K009

**Characteristics and ordering codes (continued)**

For further technical data see page 6.


$L_R$ $\mu\text{H}$	Tolerance <sup>1)</sup>	$Q_{\min}$	$f_Q$ MHz	$I_R$ mA	$R_{\max}$ $\Omega$	$f_{\text{res, min}}$ MHz	Ordering code <sup>2)</sup> (reel packing) <sup>3)</sup>
Ferrite cylinder core							
1.0	$\pm 10\%$ $\triangleq K$	35	25.2	630	0.25	180	B781*8T1102K000
1.2		40	7.96	610	0.25	170	B781*8T1122K000
1.5		40	7.96	570	0.30	150	B781*8T1152K000
1.8		40	7.96	540	0.30	130	B781*8T1182K000
2.2		40	7.96	520	0.35	120	B781*8T1222K000
2.7		40	7.96	480	0.40	110	B781*8T1272K000
3.3		40	7.96	420	0.50	110	B781*8T1332K000
3.9		40	7.96	400	0.55	100	B781*8T1392K000
4.7		40	7.96	380	0.65	90	B781*8T1472K000
5.6		45	7.96	260	1.30	75	B781*8T1562K000
6.8	45	7.96	250	1.45	70	B781*8T1682K000	
8.2	50	7.96	240	1.60	65	B781*8T1822K000	
10	50	7.96	230	1.70	60	B781*8T1103K000	
12	55	2.52	190	2.40	50	B781*8T1123K000	
15	55	2.52	185	2.70	45	B781*8T1153K000	
18	55	2.52	175	2.90	40	B781*8T1183K000	
22	60	2.52	170	3.20	30	B781*8T1223K000	
27	60	2.52	160	3.60	27	B781*8T1273K000	
33	60	2.52	150	4.10	24	B781*8T1333K000	
39	60	2.52	140	4.50	22	B781*8T1393K000	
47	60	2.52	100	8.50	20	B781*8T1473K000	
56	60	2.52	100	8.80	18	B781*8T1563K000	
68	60	2.52	95	10.0	15	B781*8T1683K000	
82	60	2.52	90	11.5	14	B781*8T1823K000	
100	60	2.52	85	12.5	11	B781*8T1104K000	

1) Closer tolerances upon request.


2) Replace the asterisk \* by code number »0« for axial taping or by »4« for radial taping.

3) For Ammo pack the last digit has to be a »9«. Example: B78108T1102K009


Impedance  $|Z|$   
versus frequency  $f$   
measured with impedance analyzer  
HP 4191A / HP 4194A

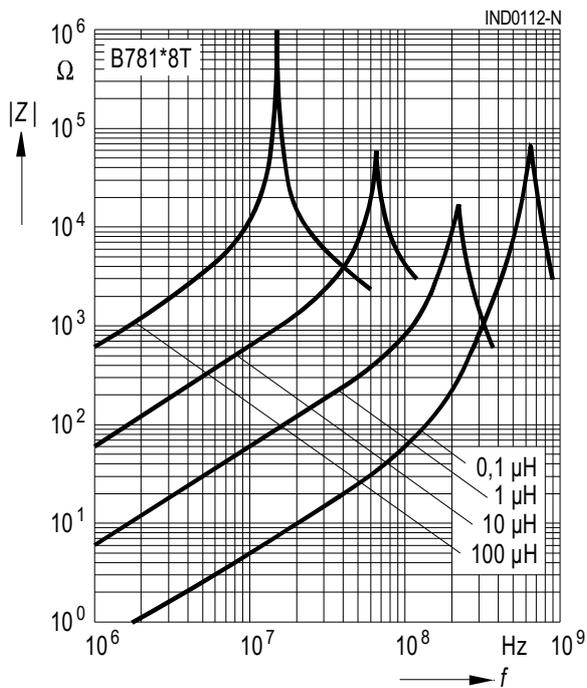


Inductance  $L$   
versus DC load current  $I_{DC}$   
measured with LCR meter  
HP 4275A

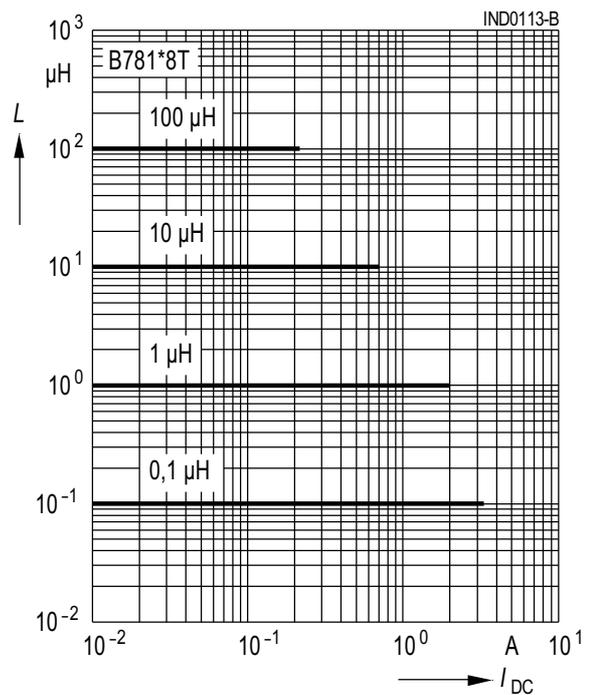

Q factor  
versus frequency  $f$   
measured with impedance analyzer  
HP 4194A

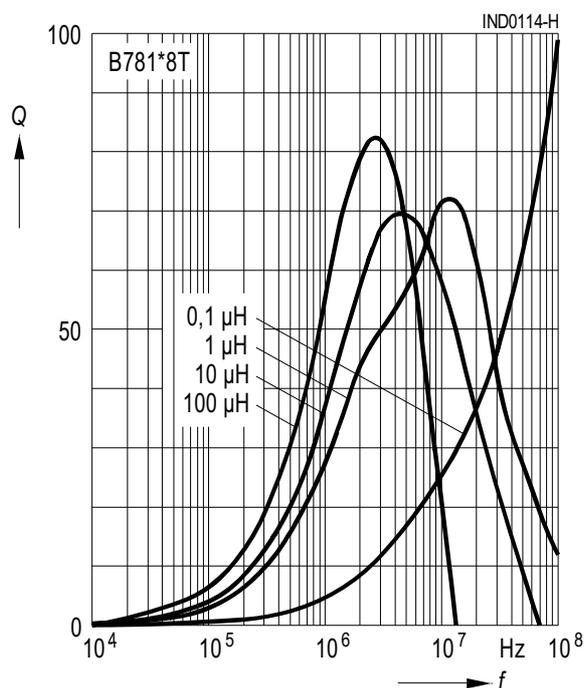

Current derating  $I_{op}/I_R$   
versus ambient temperature  $T_A$   
(rated temperature  $T_R = 40\text{ °C}$ )

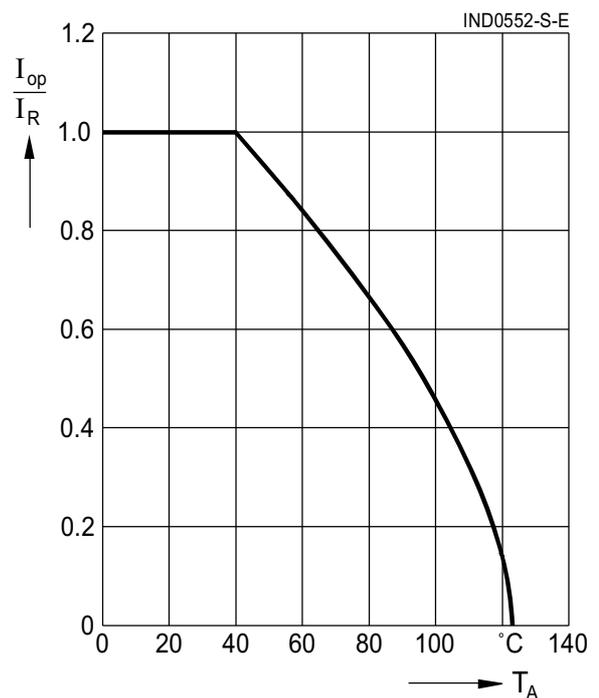

<b>RF chokes</b>	<b>B78108T</b>
<b>MCC series</b>	<b>B78148T</b>

**General technical data**

Rated inductance $L_R$	Measuring frequency: $L \leq 10 \mu\text{H}$ = 1 MHz $10 \mu\text{H} < L \leq 4700 \mu\text{H}$ = 100 kHz $L > 4700 \mu\text{H}$ = 10 kHz Measuring current: $\leq 1 \text{ mA}$ Distance between measuring clamps: 25.4 mm
Q factor $Q_{\min}$	Measured with HP 4342A
Rated current $I_R$	Maximum permissible DC current referred to 40 °C ambient temperature, for derating see below
Inductance decrease $\Delta L/L_0$	$\leq 10\%$ (referred to initial value) at $I_R$ at 20 °C ambient temperature
DC resistance $R_{\max}$	Measured at 20 °C ambient temperature, distance between measuring clamps: 25.4 mm
Resonance frequency $f_{\text{res, min}}$	Measured with Scalar Network Analyzer ZAS from Rohde & Schwarz
Climatic category	55/125/56 (–55 °C/+125 °C/56 days damp heat test) to IEC 60068-1
Solderability	235 °C, 2 s, $\geq 90\%$ wetting to IEC 60068-2–20, test Ta
Resistance to soldering heat	To IEC 60068-2-20, test Tb 260 °C, 10 s
Tensile strength of leads	To IEC 60068-2-21, test Ua $\geq 20 \text{ N}$
RoHS-compatible	RoHS-compatible is defined as compatible with the following documents: DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 13 February 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment COM (2004) 606 final Proposal for a COUNCIL DECISION amending Directive 2002/95/EC of the European Parliament and of the Council for the purposes of establishing the maximum concentration values for certain hazardous substances in electrical and electronic equipment.
 Mounting information	When bending the leads, take care that the start-of-winding areas at the face ends (protected by glue and lacquer) are not subjected to any mechanical stress.

**Color coding of the inductance value**


The inductance value and tolerance are encoded by means of colored bands in accordance with IEC 60062. The basic unit is  $\mu\text{H}$ .

1<sup>st</sup> band 1<sup>st</sup> digit of inductance value

2<sup>nd</sup> band 2<sup>nd</sup> digit of inductance value


3<sup>rd</sup> band multiplier, i.e. the power of ten, by which the first two digits have to be multiplied.

4<sup>th</sup> band tolerance of the inductance value.



Color code	1 <sup>st</sup> band = 1 <sup>st</sup> digit	2 <sup>nd</sup> band = 2 <sup>nd</sup> digit	3 <sup>rd</sup> band = multiplier	4 <sup>th</sup> band = tolerance
Colorless	—	—	—	$\pm 20\%$ (M)
Silver	—	—	$\times 10^{-2} \mu\text{H} = 0.01 \mu\text{H}$	$\pm 10\%$ (K)
Gold	—	—	$\times 10^{-1} \mu\text{H} = 0.1 \mu\text{H}$	$\pm 5\%$ (J)
Black	—	0	$\times 10^0 \mu\text{H} = 1 \mu\text{H}$	—
Brown	1	1	$\times 10^1 \mu\text{H} = 10 \mu\text{H}$	
Red	2	2	$\times 10^2 \mu\text{H} = 100 \mu\text{H}$	$\pm 2\%$ (G)
Orange	3	3	$\times 10^3 \mu\text{H} = 1000 \mu\text{H}$	
Yellow	4	4	$\times 10^4 \mu\text{H} = 10000 \mu\text{H}$	
Green	5	5	$\times 10^5 \mu\text{H} = 100000 \mu\text{H}$	
Blue	6	6		Special designs manufactured to customer specifications are identified by a white tolerance band.
Violet	7	7		
Grey	8	8		
White	9	9		


*Examples:*



1 <sup>st</sup> band	2 <sup>nd</sup> band	3 <sup>rd</sup> band	4 <sup>th</sup> band	Decoding
Yellow 4	Violet 7	Gold $\times 0.1 \mu\text{H}$	Silver $\pm 10\%$	$= 47 \times 0.1 \mu\text{H} \pm 10\% = 4.7 \mu\text{H} \pm 10\%$
Brown 1	Green 5	Red $\times 100 \mu\text{H}$	Gold $\pm 5\%$	$= 15 \times 100 \mu\text{H} \pm 5\% = 1500 \mu\text{H} \pm 5\%$


**Taping and packing**

Axially taped (to IEC 60286-1)

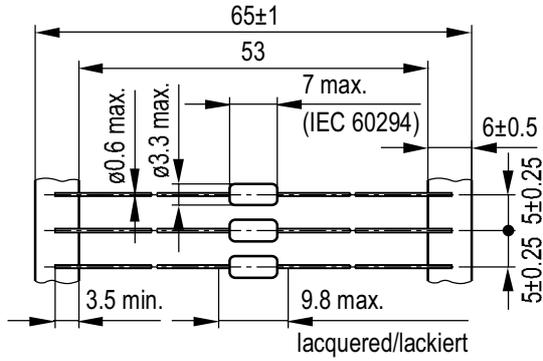

IND0427-U


Radially taped (to IEC 60286-2)

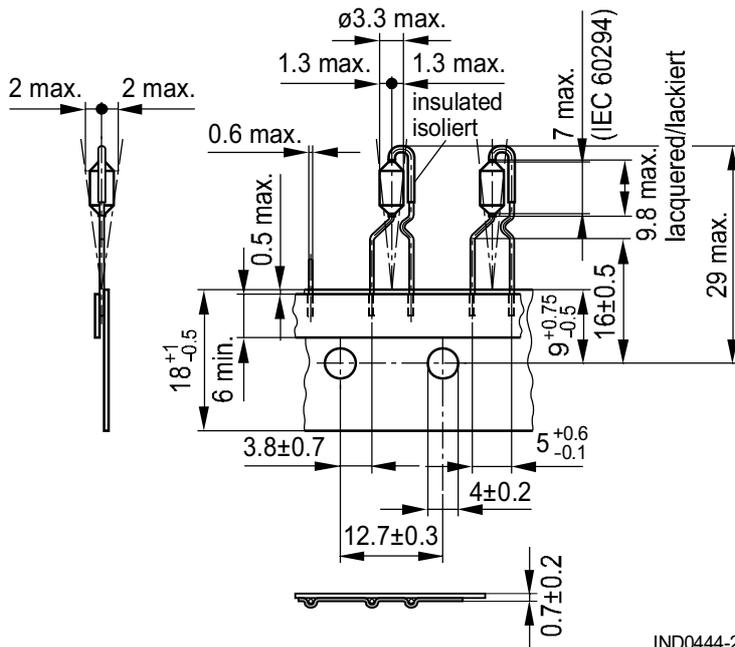

IND0444-2


<b>RF chokes</b>	<b>B78108T</b>
<b>MCC series</b>	<b>B78148T</b>

### Reel packing

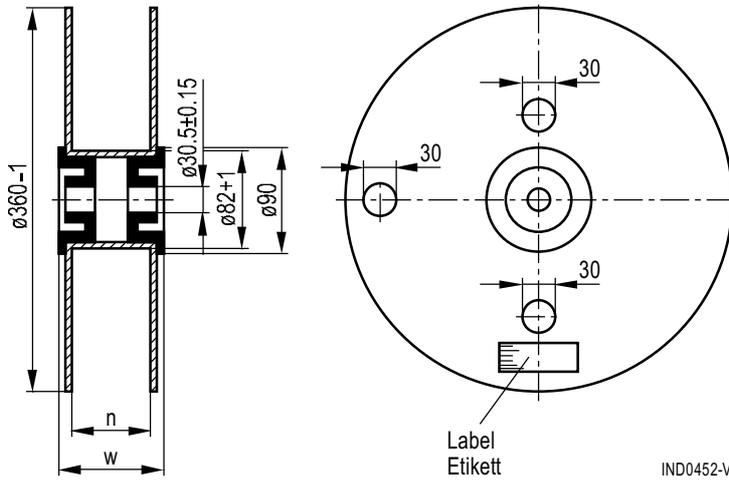

	Axial	Radial
n (mm)	72 +1	42 +1
w (mm)	84 max.	54 max.

### Ammo pack

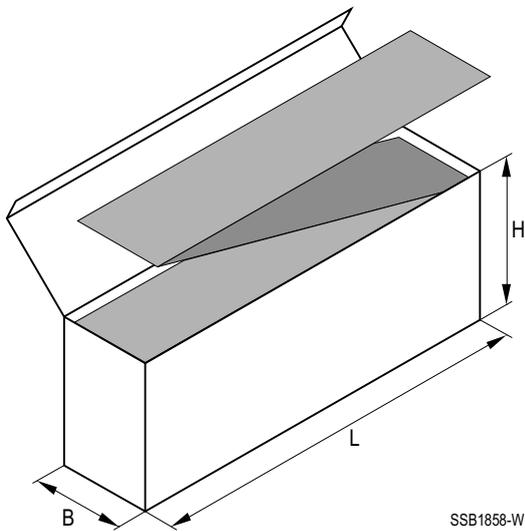

	Axial	Radial
L (mm)	310 max.	340 max.
B (mm)	75 max.	50 max.
H (mm)	120 max.	210 max.

### Packing units

	Reel packing pcs./reel	Ammo pack pcs./pack.
Axial	5000	5000
Radial	2000	2500

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**.  
As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as “hazardous”)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.  
  
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the “General Terms of Delivery for Products and Services in the Electrical Industry” published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SilverCap, SIFI, SIMID, SIKOREL, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).