PNP Silicon AF Transistor Array

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage
- Two (galvanic) internal isolated Transistors with good matching in one package

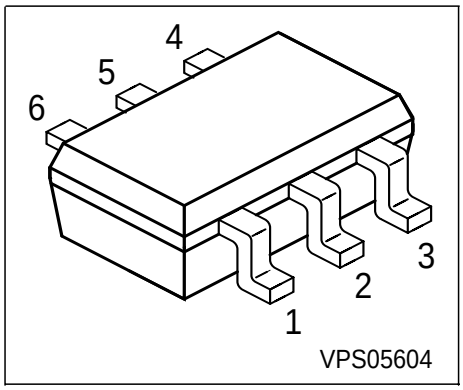



Type	Marking	Pin Configuration						Package
BC857S	3Cs	1=E1	2=B1	3=C2	4=E2	5=B2	6=C1	SOT363

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector-emitter voltage	V_{CEO}	45	V
Collector-base voltage	V_{CBO}	50	
Collector-emitter voltage	V_{CES}	50	
Emitter-base voltage	V_{EBO}	5	
DC collector current	I_C	100	mA
Peak collector current	I_{CM}	200	
Total power dissipation, T_S = 115 °C	P_{tot}	250	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-65 ... 150	

Thermal Resistance

Junction - soldering point[1)]	R_{thJS}	≤140	K/W

[1]For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at T_A=25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics per Transistor					
Collector-emitter breakdown voltage I_C = 10 mA, I_B = 0	$V_{(BR)CEO}$	45	-	-	V
Collector-base breakdown voltage I_C = 10 µA, I_E = 0	$V_{(BR)CBO}$	50	-	-	
Collector-emitter breakdown voltage I_C = 10 µA, V_{BE} = 0	$V_{(BR)CES}$	50	-	-	
Emitter-base breakdown voltage I_E = 10 µA, I_C = 0	$V_{(BR)EBO}$	5	-	-	
Collector cutoff current V_{CB} = 30 V, I_E = 0	I_{CBO}	-	-	15	nA
Collector cutoff current V_{CB} = 30 V, I_E = 0 , T_A = 150 °C	I_{CBO}	-	-	5	µA
DC current gain 1) I_C = 10 µA, V_{CE} = 5 V I_C = 2 mA, V_{CE} = 5 V	h_{FE}	 - 200	 250 290	 - 630	-
Collector-emitter saturation voltage1) I_C = 10 mA, I_B = 0.5 mA I_C = 100 mA, I_B = 5 mA	V_{CEsat}	 - -	 75 250	 300 650	mV
Base-emitter saturation voltage 1) I_C = 10 mA, I_B = 0.5 mA I_C = 100 mA, I_B = 5 mA	V_{BEsat}	 - -	 700 850	 - -	
Base-emitter voltage 1) I_C = 2 mA, V_{CE} = 5 V I_C = 10 mA, V_{CE} = 5 V	$V_{BE(ON)}$	 600 -	 650 -	 750 820	V

1) Pulse test: t < 300µs; D < 2%

Electrical Characteristics at T_A = 25 °C, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC characteristics					
Transition frequency I_C = 20 mA, V_{CE} = 5 V, f = 100 MHz	f_T	-	250	-	MHz
Collector-base capacitance V_{CB} = 10 V, f = 1 MHz	C_{cb}	-	3	-	pF
Emitter-base capacitance V_{EB} = 0.5 V, f = 1 MHz	C_{eb}	-	10	-	
Short-circuit input impedance I_C = 2 mA, V_{CE} = 5 V, f = 1 kHz	h_{11e}	-	4.5	-	kΩ
Open-circuit reverse voltage transf.ratio I_C = 2 mA, V_{CE} = 5 V, f = 1 kHz	h_{12e}	-	2	-	10^{-4}
Short-circuit forward current transf.ratio I_C = 2 mA, V_{CE} = 5 V, f = 1 kHz	h_{21e}	-	330	-	-
Open-circuit output admittance I_C = 2 mA, V_{CE} = 5 V, f = 1 kHz	h_{22e}	-	30	-	µS
Noise figure I_C = 200 µA, V_{CE} = 5 V, R_S = 2 kΩ, f = 1 kHz, Δ f = 200 Hz	F	-	-	10	dB

Total power dissipation $P_{tot} = f(T_S)$

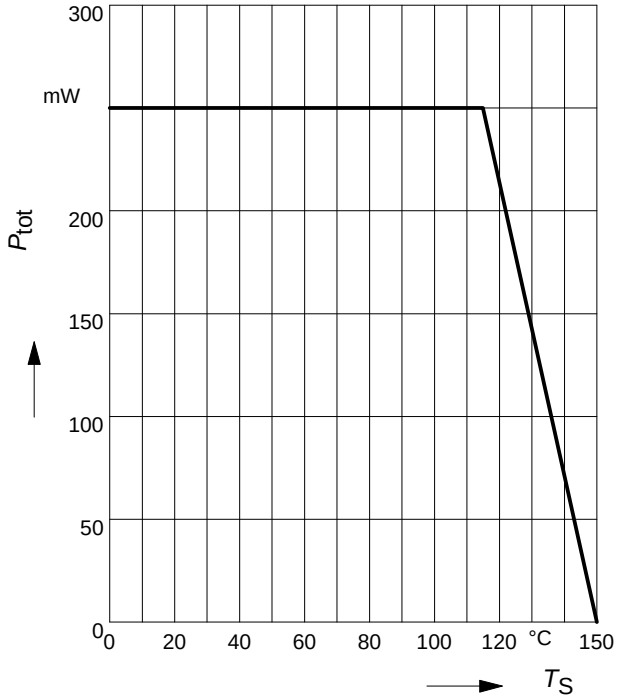

Permissible Pulse Load $R_{thJS} = f(t_p)$

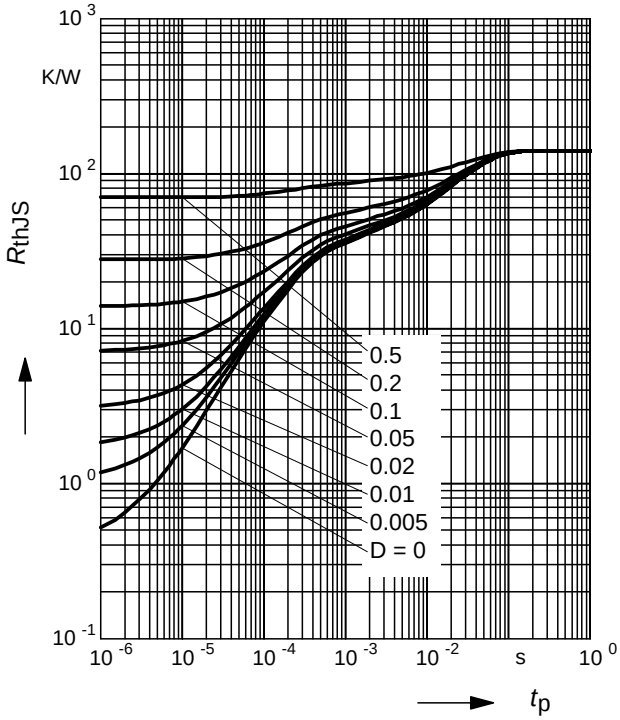

Permissible Pulse Load

$P_{totmax} / P_{totDC} = f(t_p)$

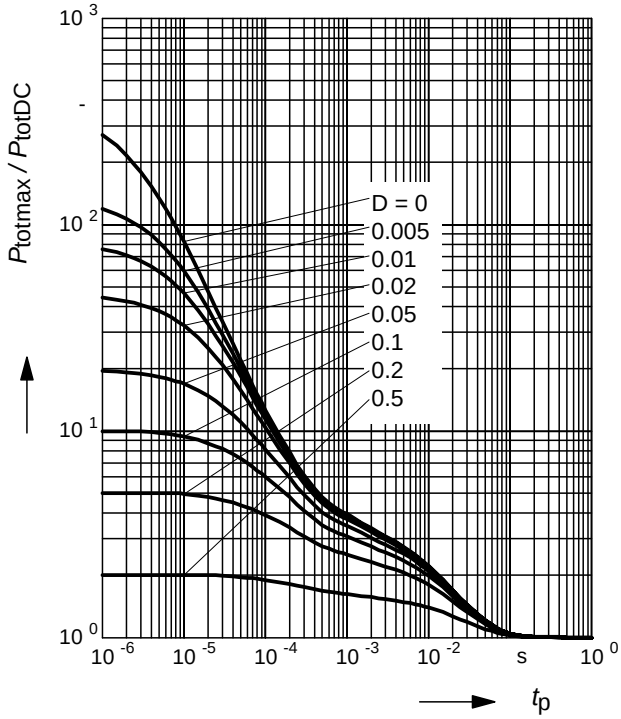

Transition frequency $f_T = f(I_C)$
V_{CE} = 5V

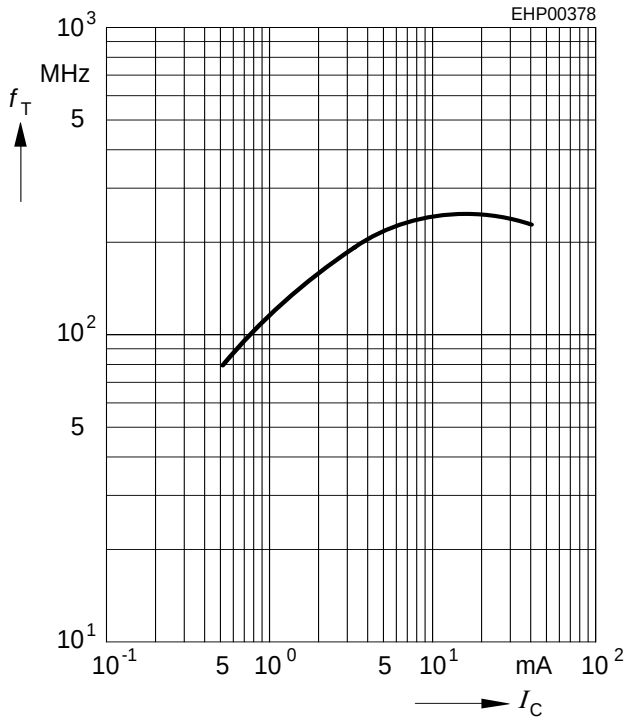

Collector-base capacitance $C_{CB} = f(V_{CBO})$
Emitter-base capacitance $C_{EB} = f(V_{EBO})$

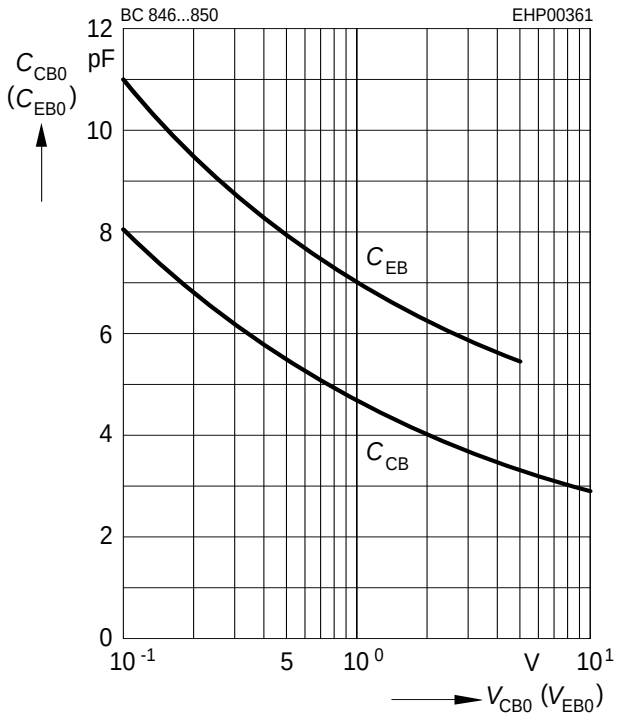

Collector cutoff current $I_{CBO} = f(T_A)$
V_{CB} = 30V

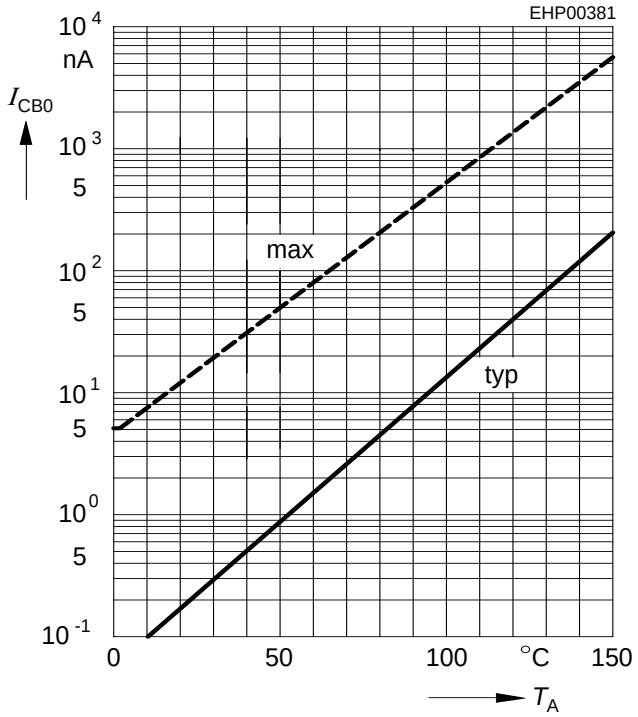

Collector-emitter saturation voltage
$I_C = f(V_{CEsat})$, h_{FE} = 20

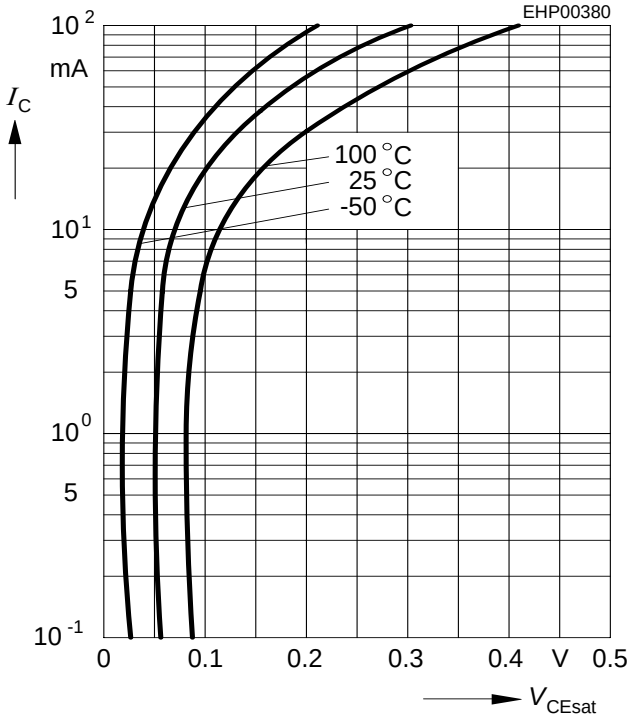

DC current gain $h_{FE} = f\,(I_C)$

V_{CE} = 5V

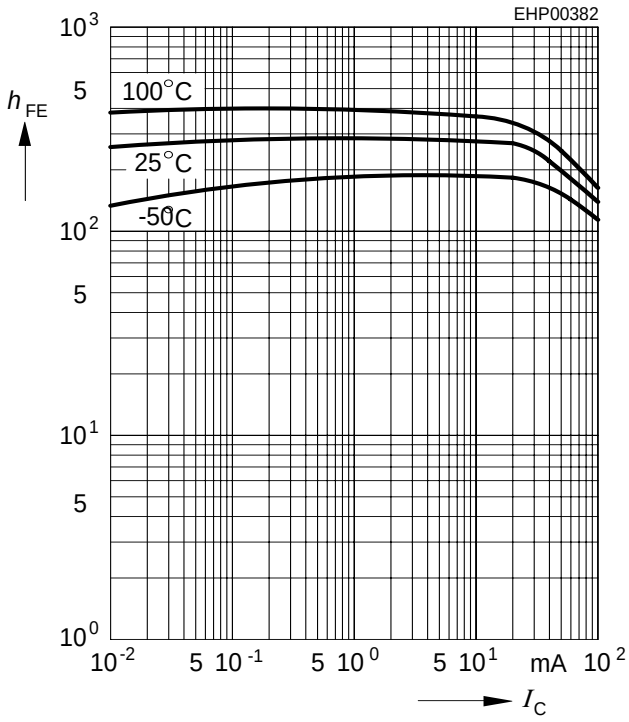

Base-emitter saturation voltage
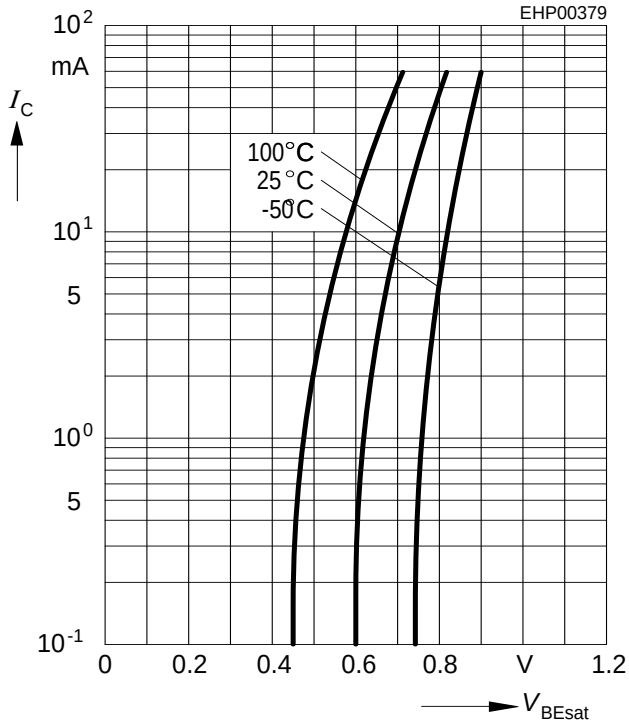
$I_C = f\,(V_{BEsat})$, h_{FE} = 20