


**PNP Silicon AF Transistors**

- For AF driver and output stages
- High collector current
- Low collector-emitter saturation voltage
- Complementary types: BCX54...BCX56 (NPN)

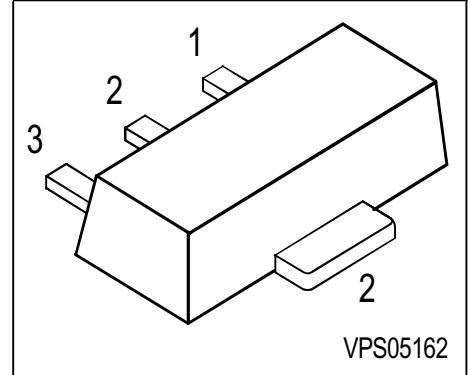

Type	Marking	Pin Configuration			Package
BCX51	AA	1 = B	2 = C	3 = E	SOT89
BCX51-10	AC	1 = B	2 = C	3 = E	SOT89
BCX51-16	AD	1 = B	2 = C	3 = E	SOT89
BCX52	AE	1 = B	2 = C	3 = E	SOT89
BCX52-10	AG	1 = B	2 = C	3 = E	SOT89
BCX52-16	AM	1 = B	2 = C	3 = E	SOT89
BCX53	AH	1 = B	2 = C	3 = E	SOT89
BCX53-10	AK	1 = B	2 = C	3 = E	SOT89
BCX53-16	AL	1 = B	2 = C	3 = E	SOT89

### Maximum Ratings

Parameter	Symbol	BCX51	BCX52	BCX53	Unit
Collector-emitter voltage	$V_{CEO}$	45	60	80	V
Collector-base voltage	$V_{CBO}$	45	60	100	
Emitter-base voltage	$V_{EBO}$	5	5	5	
DC collector current	$I_C$		1		A
Peak collector current	$I_{CM}$		1.5		
Base current	$I_B$		100		mA
Peak base current	$I_{BM}$		200		
Total power dissipation, $T_S = 130 \text{ }^\circ\text{C}$	$P_{tot}$		1		W
Junction temperature	$T_j$		150		$^\circ\text{C}$
Storage temperature	$T_{stg}$		-65 ... 150		

### Thermal Resistance

Junction - soldering point <sup>1)</sup>	$R_{thJS}$	$\leq 20$	K/W
--	------------	-----------	-----


<sup>1</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 10 \text{ mA}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	45	-	-	V
		60	-	-	
		80	-	-	
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CBO}}$	45	-	-	
		60	-	-	
		100	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
		-	-	-	
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0$	$I_{\text{CBO}}$	-	-	100	nA
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$	$I_{\text{CBO}}$	-	-	20	$\mu\text{A}$
DC current gain 1) $I_C = 5 \text{ mA}, V_{CE} = 2 \text{ V}$	$h_{\text{FE}}$	25	-	-	
		-	-	-	
		-	-	-	
DC current gain 1) $I_C = 150 \text{ mA}, V_{CE} = 2 \text{ V}$	$h_{\text{FE}}$	40	-	250	
		63	100	160	
		100	160	250	
DC current gain 1) $I_C = 500 \text{ mA}, V_{CE} = 2 \text{ V}$	$h_{\text{FE}}$	25	-	-	
		-	-	-	
Collector-emitter saturation voltage1) $I_C = 500 \text{ mA}, I_B = 50 \text{ mA}$	$V_{\text{CEsat}}$	-	-	0.5	V
Base-emitter voltage 1) $I_C = 500 \text{ mA}, V_{CE} = 2 \text{ V}$	$V_{\text{BE}(\text{ON})}$	-	-	1	
<b>AC Characteristics</b>					
Transition frequency $I_C = 50 \text{ mA}, V_{CE} = 10 \text{ V}, f = 20 \text{ MHz}$	$f_T$	-	125	-	MHz


1) Pulse test:  $t \leq 300\mu\text{s}$ ,  $D = 2\%$

**Total power dissipation**  $P_{\text{tot}} = f(T_S)$

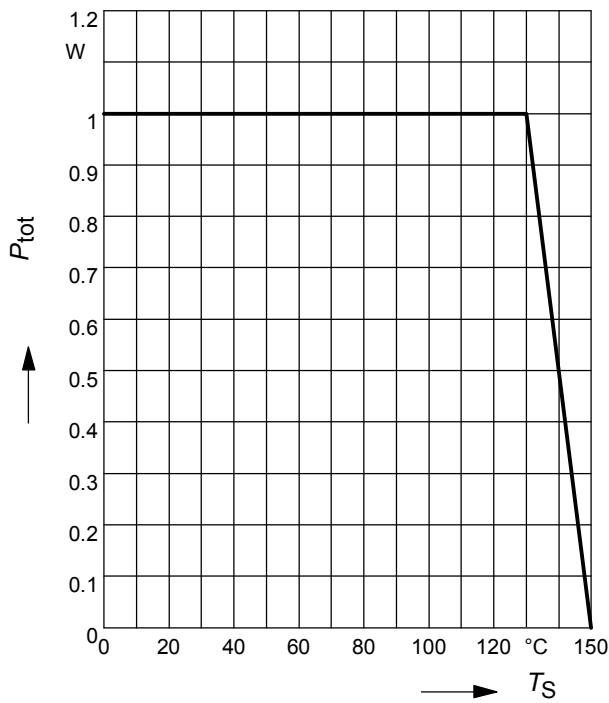


**Permissible pulse load**

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

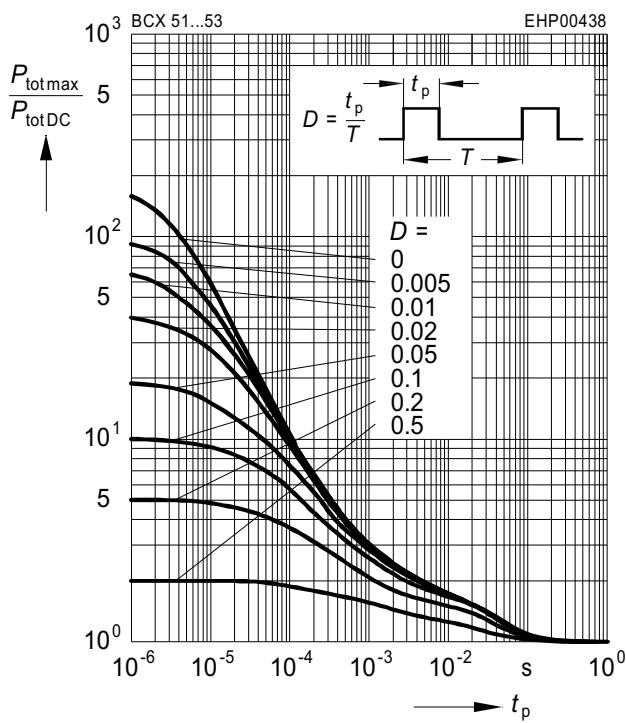


**Collector current**  $I_C = f(V_{BE})$

$V_{CE} = 2V$

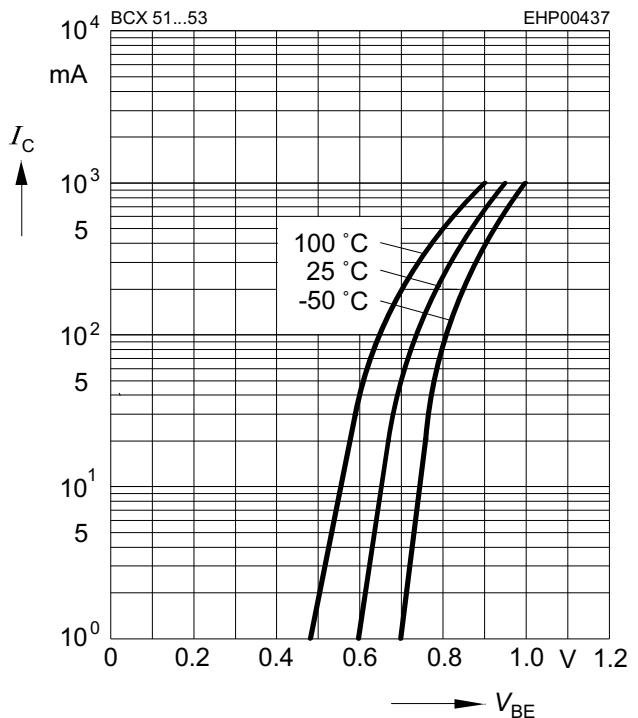


**Transition frequency**  $f_T = f(I_C)$

$V_{CE} = 10V$

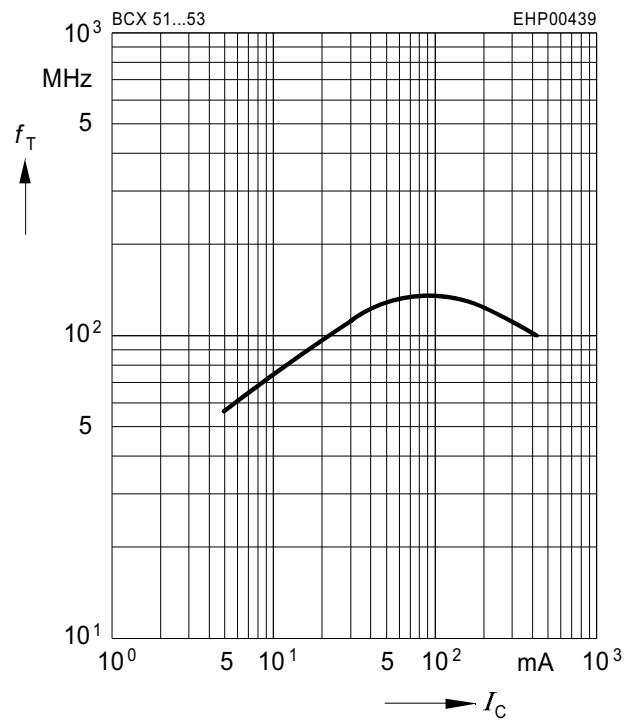


**DC current gain  $h_{FE} = f(I_C)$**

$$V_{CE} = 2V$$

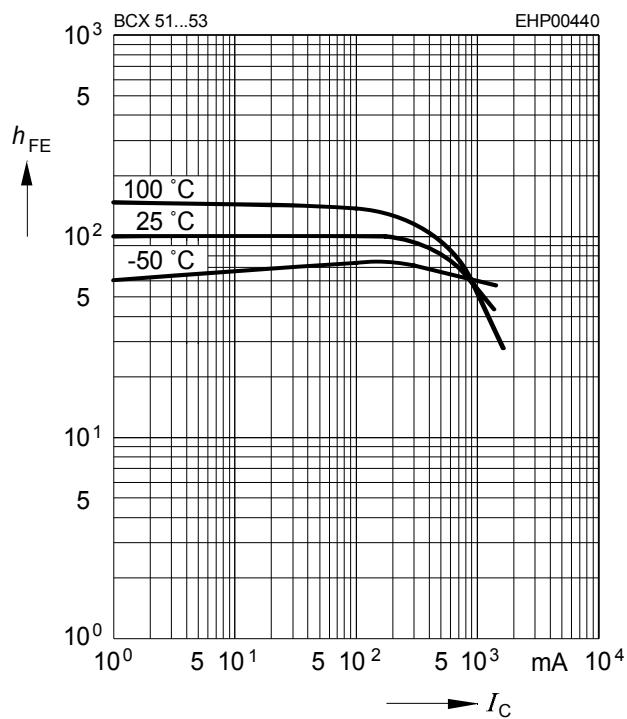


**Collector cutoff current  $I_{CBO} = f(T_A)$**

$$V_{CB} = 30V$$

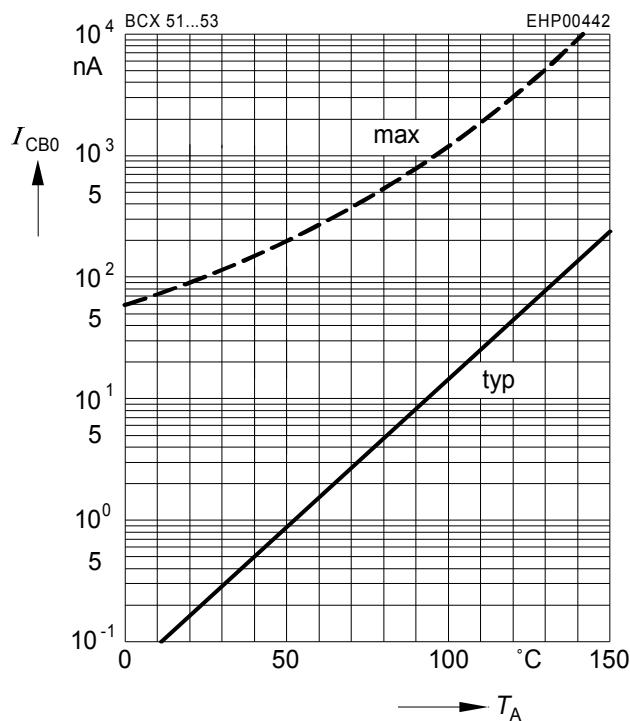

**Collector-emitter saturation voltage**

$$I_C = f(V_{CEsat}), h_{FE} = 10$$

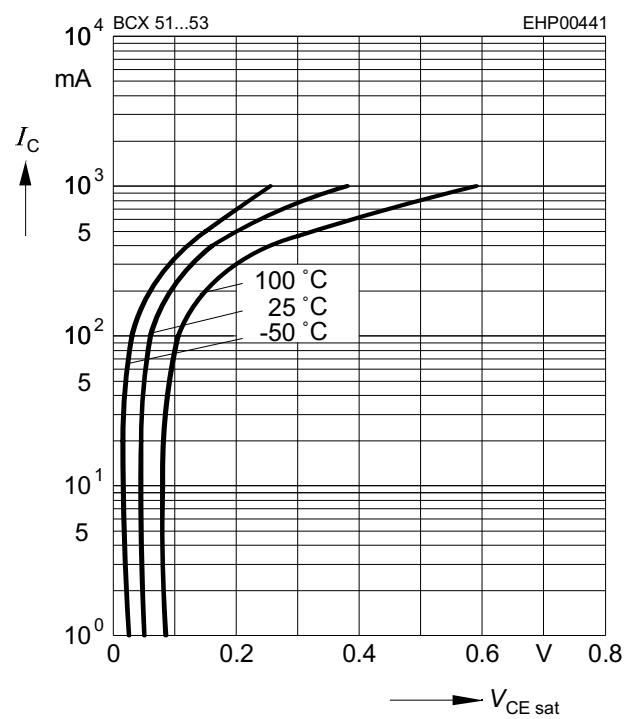

**Base-emitter saturation voltage**

$$I_C = f(V_{BEsat}), h_{FE} = 10$$

