

BXA15 Series

Triple output

- Pin-compatible with BXA30 series
- Designed to meet telecom power supply interface standard ETS300-132-2
- UL, VDE and CSA safety approvals
- VDE0878 and EN55022 conducted emissions level A
- EN61000-4-2, -3, -4, -5, -6 immunity compliant
- Fixed frequency operation at 350kHz
- MTBF in excess of 7,005,000 hours (demonstrated)
- Basic insulation system



2 YEAR WARRANTY

The BXA15 triple output series, comprising 4 different models, has been conceived as an applications specific range of DC/DC converters, specifically addressing telecommunications, industrial electronics, test equipment, mobile telecommunications and distributed power applications. The series offers two wide input voltage ranges, 18-36VDC and 36-75VDC. Designed to meet ETSI telecoms interface standards ETS300-132-2 and BTR2511, together with internal filtering to EN55022 level A, safety approval to EN60950 and UL1950, and basic isolation of 1500VDC, the 48VDC models are ideal for telecommunications applications. The 24V models are particularly suited to industrial, mobile telecom and test equipment applications, featuring EN61000-4-2, -3, -4, -5 and -6 immunity compliance. Other features include low output ripple, overvoltage protection, short circuit protection, remote enable.

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Output power		15W
Line regulation (See Note 1)	Main output	±0.5%
	Auxiliary output	±2.0%
Load regulation (See Note 2)	Main output	±1.0%
	Auxiliary output	±3.0%
Ripple and noise 20MHz bandwidth	Main output	75mV pk-pk 15mV rms
	Auxiliary outputs	100mV pk-pk 20mV rms
Temperature coefficient		±0.02%/°C
Overvoltage protection	Transient, all outputs	135% Vout init.
Short circuit protection	All outputs (See BXA15 and BXA30 Design Note 100)	Yes
Transient response	25% to 100% load, all outputs	10%
Voltage accuracy	Main output	±1.5%
	Auxiliary output	±3.0%
Load cross regulation	40% to 100% load, all outputs	
	Main output Auxiliary output	1.0% 10%
Minimum load	Main output for auxiliary regulation (See Note 8)	≥20%

INPUT SPECIFICATIONS

Input voltage range	24Vin nominal	18 to 36VDC
	48Vin nominal	36 to 75VDC
Reverse voltage protection	(See Note 5)	Yes
Max. input rise and fall time	48V	5V/ms ETS300-132
Remote ON/OFF Logic compatibility		CMOS/TTL ON Open circuit OFF <1VDC

EMC CHARACTERISTICS

Conducted noise	EN55022, FCC part 15 (Note 3)	Level A
	EN55022, FCC part 15 (Note 4)	Level A
	VDE0878 (Note 3) (48V)	Level A
Radiated emissions	EN55022, FCC part 15	Level A
ESD air	EN61000-4-2, level 3	Perf. criteria 2
ESD contact	EN61000-4-2, level 4	Perf. criteria 2
Surge	EN61000-4-5, level 3	Perf. criteria 2
Fast transients	EN61000-4-4, level 3	Perf. criteria 2
Radiated immunity	EN61000-4-3, level 3	Perf. criteria 2
Conducted immunity	EN61000-4-6, level 3	Perf. criteria 2

GENERAL SPECIFICATIONS

Efficiency		See table
Isolation voltage	Input/output	1500VDC
Basic insulation	Input/case, 48V models	1500VDC
Switching frequency	Fixed	350kHz, nom.
Approvals and standards (See Note 7)		VDE0805, EN60950 IEC950, UL1950 CSA C22.2 No. 950
Case material		Aluminum substrate with plastic case
Material flammability		UL94V-0
Weight		130g (4.6oz)
MTBF (See Note 9)	Demonstrated @ 25°C	7,005,000 hours

ENVIRONMENTAL SPECIFICATIONS

Thermal performance	Baseplate operating temperature (Note 6)	-25°C to +100°C
	Non-operating	-55°C to +100°C
Thermal impedance	Free air convection, baseplate to air	6.5°C/W

BXA15 Series

Triple output


For the most current data and application support visit www.artesyn.com/powergroup/products.htm

INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MAX.)	OUTPUT CURRENT (MIN.)	INPUT CURRENT NO LOAD	TYPICAL EFFICIENCY	MODEL NUMBER
18-36VDC	5/±12VDC	1.5/±0.310A	0.3/±0.062A	70mA rms	79%	BXA15-24T05-12
18-36VDC	5/±15VDC	1.5/±0.250A	0.3/±0.05A	70mA rms	81%	BXA15-24T05-15
36-75VDC	5/±12VDC	1.5/±0.310A	0.3/±0.062A	40mA rms	80%	BXA15-48T05-12
36-75VDC	5/±15VDC	1.5/±0.250A	0.3/±0.05A	40mA rms	81%	BXA15-48T05-15

Notes

- Nominal line to high line. Nominal line to low line.
- 20% to full load. The value stated is for balanced loads.
- An optional internal filter is available, which will meet VDE0871 level A, VDE0878 level A and EN55022 level A. Add the suffix '-F' to the model number, e.g. **BXA15-48T05-12-F**.
- For conducted noise operation of the BXA15 to VDE0871, VDE0878 and EN55022 level B, see BXA15 and BXA30 Design Note 100.
- Reverse voltage protection can be implemented by putting a slow blow fuse on the negative input rail. Rate the fuse for 100VDC at 1.5A for 48V models; 50VDC at 3A for 24V models.
- The maximum operating ambient temperature, without derating depends on internal power dissipation and cooling method. BXA15 and BXA30 Design Note 100 provides detailed thermal calculations and design-in details.
- This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.
- The load on the main output must exceed 20% to ensure operation of the unit to specification.
- Test results to-date are 1,590,000 hours @ 46°C. The MTBF figure shown includes a calculated acceleration factor of 4.1 based on an activation energy of -0.55 eV.
- Visit the Artesyn website to download a copy of Design Note 100.

PIN CONNECTIONS	
PIN NUMBER	TRIPLE OUTPUT
1	+ Vin
2	- Vin
3	+ Auxiliary Output
4	Output Common
5	- Auxiliary Output
6	+ Main Output
7	No Connection
8	Remote ON/OFF

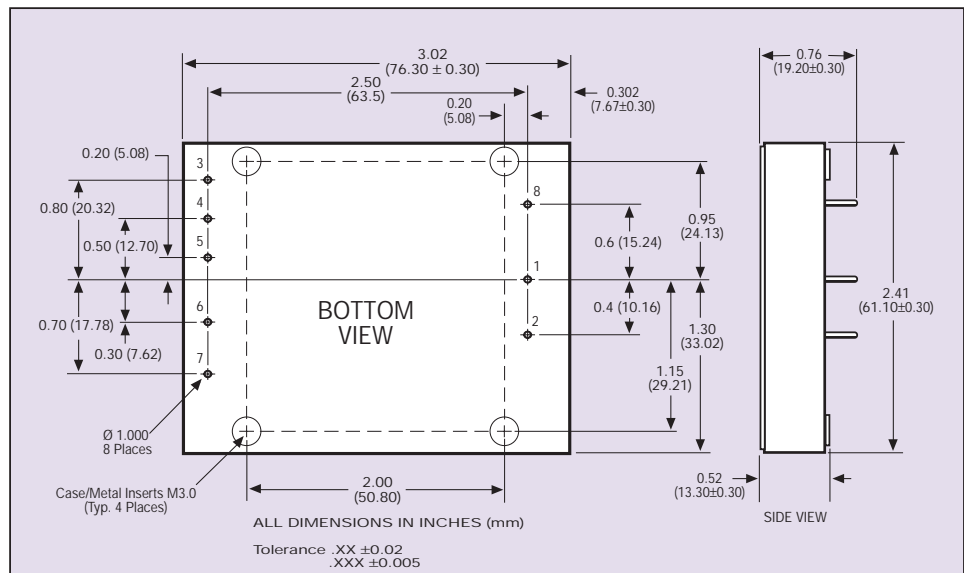

International Safety Standard Approvals

VDE VDE0805/EN60950/IEC950 File No. 14501-3336-7006
Licence No. 6231

UL UL1950 File No. E174104

CSA CSA C22.2 No. 950 File No. LR41062C

Data Sheet © Artesyn Technologies® 2002

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: ✓ Design Note

www.artesyn.com