
Material:

- * Insulation: Glass filled polyester UL 94V-0
- * Contact: Phosphor Bronze

Ordering Code:


- 1) Series No.
- 2 NO. of Circuits:
- 3 Plating code: 2= Gold flash plated over 1.27µm(50µ") Nickel
- 4 Tail Style: H= Right angle
- ⑤ Color: 1= Black
- 6 Options: 00= Standard



Recommended P.C. Board Layout

RoHS Compliant

		5.00
		000
		i) (i

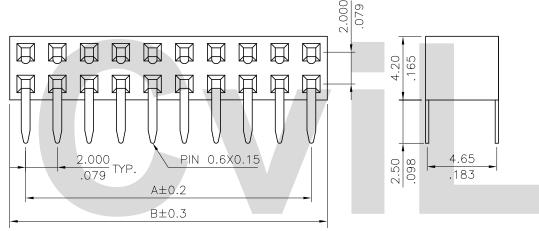

A = 2.00 * No. of Spaces

B = A + 2.50

* Available in 4 through 50 circuits

4						DATE	UNIT: mm / inch		TITLE: 2.0
3				DRAWN BY:	Rita	11/22 01'	TOLERANCE UNLESS OTHERWISE SPECIFIED] ENTR
2				ENGINEER:	David	11/28 01'	.X ± 0.30/.012		MATERIAL
\triangle				CHECKED BY:	David	11/28 01'	$\frac{.X}{.XX} \pm 0.20/.008$		FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	11/28 01'	.XXX ± 0.10/.004	.XX° ±	I IIIIJII.

	TITLE: 2.00MM(.079") DUAL ROW SIDE	
	ENTRY BOARD MOUNT CONNECTOR	
_	MATERIAL:	L
]

	_
/	

▲ 瀚荃股份有限公司 「CviLux Corporation

DRAWING NO.	CB7801SC	PART NO.	СВ	78**	2H1C	00
SCALE.	4 / 1	SHFFT	1	0F	1	