

DM74ALS109A Dual J- $\bar{K}$ Positive-Edge-Triggered Flip-Flop with Preset and Clear

General Description

The DM74ALS109A is a dual edge-triggered flip-flop. Each flip-flop has individual J, $\bar{K}$, clock, clear and preset inputs, and also complementary Q and $\bar{Q}$ outputs.

Information at input J or $\bar{K}$ is transferred to the Q output on the positive going edge of the clock pulse. Clock triggering occurs at a voltage level of the clock pulse and is not directly related to the transition time of the positive going pulse. When the clock input is at either the high or low level, the J, $\bar{K}$ input signal has no effect.


Asynchronous preset and clear inputs will set or clear Q output respectively upon the application of low level signal.

The J- $\bar{K}$ design allows operation as a D flip-flop by tying the J and $\bar{K}$ inputs together.

Features

- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and V_{CC} range
- Advanced oxide-isolated, ion-implanted Schottky TTL process
- Functionally and pin for pin compatible with Schottky and LS TTL counterpart
- Improved AC performance over LS109 at approximately half the power

Connection Diagram

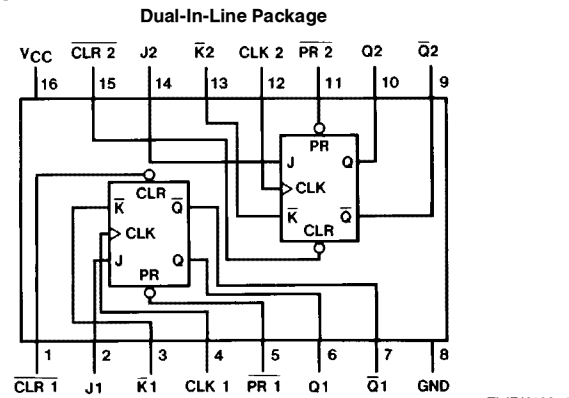

Order Number DM74ALS109AM or DM74ALS109AN
See NS Package Number M16A or N16A

Function Table

Inputs					Outputs	
PR	CLR	CK	J	$\bar{K}$	Q	$\bar{Q}$
L	H	X	X	X	H	L
H	L	X	X	X	L	H
L	L	X	X	X	H*	H*
H	H	$\uparrow$	L	L	L	H
H	H	$\uparrow$	H	L	TOGGLE	
H	H	$\uparrow$	L	H	Q_0	$\bar{Q}_0$
H	H	$\uparrow$	H	H	H	L
H	H	L	X	X	Q_0	$\bar{Q}_0$

L = Low State, H = High State, X = Don't Care

$\uparrow$ = Positive Edge Transition, Q_0 = Previous Condition of Q

*This condition is nonstable; it will not persist when present and clear inputs return to their inactive (high) level. The output levels in this condition are not guaranteed to meet the V_{OH} specification.

Absolute Maximum Ratings

Supply Voltage	7V
Input Voltage	7V
Operating Free Air Temperature Range	
DM74ALS	0°C to +70°C
Storage Temperature Range	−65°C to +150°C
Typical θ_{JA}	
N Package	82.5°C/W
M Package	111.5°C/W

Note: The “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the “Electrical Characteristics” table are not guaranteed at the absolute maximum ratings. The “Recommended Operating Conditions” table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter		DM74ALS109A			Units
			Min	Nom	Max	
V_{CC}	Supply Voltage		4.5	5	5.5	V
V_{IH}	High Level Input Voltage		2			V
V_{IL}	Low Level Input Voltage				0.8	V
I_{OH}	High Level Output Current				−0.4	mA
I_{OL}	Low Level Output Current				8	mA
f_{CLK}	Clock Frequency		0		34	MHz
$t_{W(CLK)}$	Pulse Width	Clock High	14.5			ns
		Clock Low	14.5			ns
t_W	Pulse Width	$\overline{Preset}$ and $\overline{Clear}$	15			ns
t_{SU}	Data Setup Time	J or $\overline{K}$	15 $\uparrow$			ns
		$\overline{PRE}$ or $\overline{CLR}$ inactive	10 $\uparrow$			
t_H	Data Hold Time		0 $\uparrow$			ns
T_A	Free Air Operating Temperature		0		70	°C

The ($\uparrow$) arrow indicates the positive edge of the Clock is used for reference.

Electrical Characteristics

over recommended operating free-air temperature range. All typical values are measured at $V_{CC} = 5V$, $T_A = 25^\circ C$.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{IK}	Input Clamp Voltage	$V_{CC} = 4.5V$, $I_I = -18\text{ mA}$			−1.5	V
V_{OH}	High Level Output Voltage	$I_{OH} = -400\text{ }\mu A$ $V_{CC} = 4.5V\text{ to }5.5V$	$V_{CC} - 2$			V
V_{OL}	Low Level Output Voltage	$V_{CC} = 4.5V$ $V_{IH} = 2V$	54/74ALS $I_{OL} = 4\text{ mA}$	0.25	0.4	V
			74ALS $I_{OL} = 8\text{ mA}$	0.35	0.5	V
I_I	Input Current at Max Input Voltage	$V_{CC} = 5.5V$, $V_{IH} = 7V$	Clock, J, $\overline{K}$		0.1	mA
			$\overline{Preset}$, $\overline{Clear}$		0.2	
I_{IH}	High Level Input Current	$V_{CC} = 5.5V$, $V_{IH} = 2.7V$	Clock, J, $\overline{K}$		20	μA
			$\overline{Preset}$, $\overline{Clear}$		40	
I_{IL}	Low Level Input Current	$V_{CC} = 5.5V$, $V_{IL} = 0.4V$	Clock, J, $\overline{K}$		−0.2	mA
			$\overline{Preset}$, $\overline{Clear}$		−0.4	
I_O (Note 2)	Output Drive Current	$V_{CC} = 5.5V$, $V_O = 2.25V$	−30		−112	mA
I_{CC}	Supply Current	$V_{CC} = 5.5V$ (Note 1)		2.4	4	mA

Note 1: I_{CC} is measured with J, $\overline{K}$, CLK and $\overline{PRESET}$ grounded, then with J, $\overline{K}$, CLK and $\overline{CLEAR}$ grounded.


Note 2: The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit output current, I_{OS} .

Switching Characteristics over recommended operating free air temperature range (Note 1)


Symbol	Parameter	Conditions	From	To	DM74ALS109A		Units
					Min	Max	
f_{MAX}	Maximum Clock Frequency	$V_{CC} = 4.5V \text{ to } 5.5V$ $R_L = 500\Omega$ $C_L = 50 \text{ pF}$			34		MHz
t_{PLH}	Propagation Delay Time Low to High Level Output		$\overline{\text{Preset}}$ or $\overline{\text{Clear}}$	Q or $\overline{Q}$	3	13	ns
t_{PHL}	Propagation Delay Time High to Low Level Output		$\overline{\text{Preset}}$ or $\overline{\text{Clear}}$	Q or $\overline{Q}$	5	15	ns
t_{PLH}	Propagation Delay Time Low to High Level Output		Clock	Q or $\overline{Q}$	5	16	ns
t_{PHL}	Propagation Delay Time High to Low Level Output		Clock	Q or $\overline{Q}$	5	18	ns

Note 1: See Section 5 for test waveforms and output load.


Logic Diagram

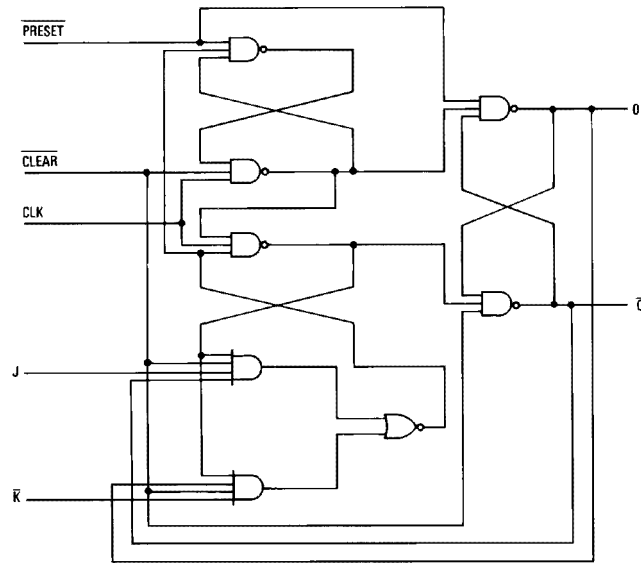

TL/F/6196-2




Physical Dimensions inches (millimeters)

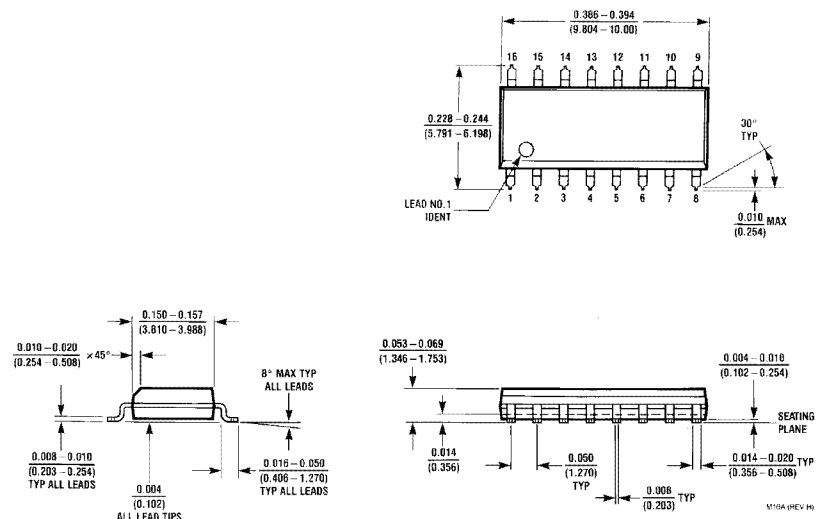

S.O. Package (M)
Order Number DM74ALS109AM
NS Package Number M16A

Physical Dimensions inches (millimeters) (Continued)

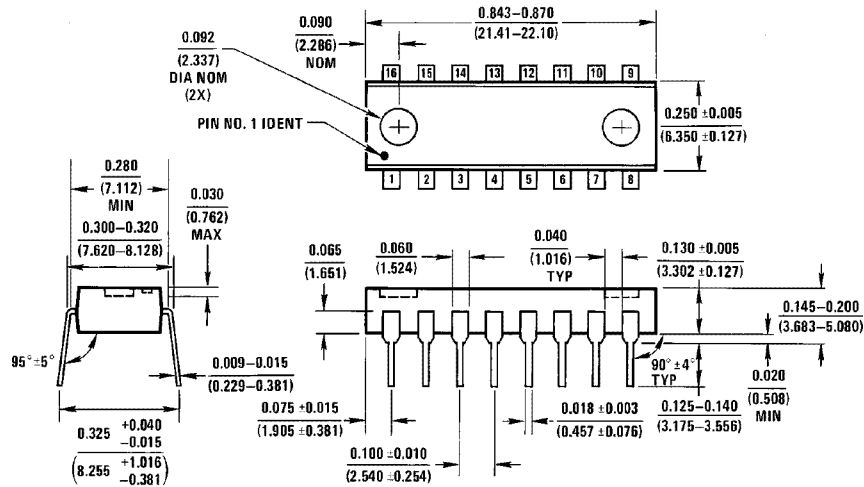

N16A (REV E)

Molded Dual-In-Line Package (N)
Order Number DM74ALS109AN
NS Package Number N16A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.