


DIN 912 - Page 1 - sim. ISO 4762

Vis à métaux tête cylindrique


six pans creux -CHC

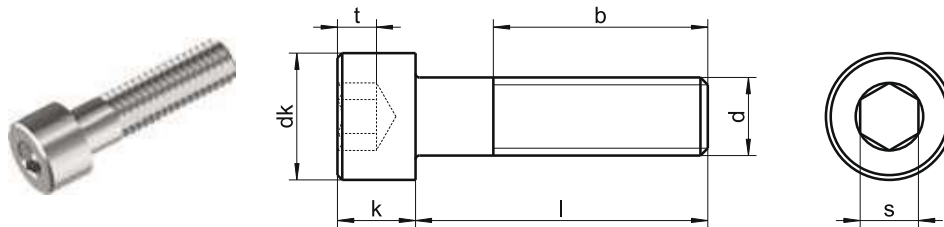

dk max.	3,0	3,8	4,5	5,5	7,0	8,5	10,0	13,0	16,0	18,0	21,0	24,0	27,0
k	1,6	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0	12,0	14,0	16,0	18,0
s	1,5	1,5	2	2,5	3	4	5	6	8	10	12	14	14
e	1,73	1,73	2,30	2,87	3,44	4,58	5,72	6,86	9,15	11,43	13,72	16,00	18,00
t	0,7	1,0	1,1	1,3	2,0	2,5	3,0	4,0	5,0	6,0	7,0	8,0	9,0
●	1,5	1,5	2	2,5	3	4	5	6	8	10	12	14	14
Long. / Ø	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18
3	▲●	▲●											
4	▲●	▲●	▲●	▲●									
5	▲●	▲●	▲●	▲●	▲●								
6	▲●	▲●	▲●	▲●	▲●	▲●	▲●						
8	▲●	▲●	▲●	▲●	▲●	▲●	▲●						
10	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●					
12	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●				
14	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●			
16	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●		
18		▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●		
20		▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
22			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
25			▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	
30				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
35				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
40				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
45				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
50				▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
55					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
60					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
65					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
70					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
75					▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
UV	1000	1000	1000	1000 ≥ 45 500	1000 ≥ 35 500	500 ≥ 45 200	500 ≥ 45 200 ≥ 75 100	200 ≥ 45 100	100	100 ≥ 55 50	25	25	25

■ A1 / ▲ A2 / ● A4 | UV: Unité de vente | Toutes dimensions en mm | Autres dimensions sur demande
Exemple Art.-Numéro.: 912-2-8X40 DIN 912 - A2 - M8 - l = 40mm

sim. ISO 4762 - **DIN 912** - Page 2
 Vis à métaux tête cylindrique
 six pans creux -CHC

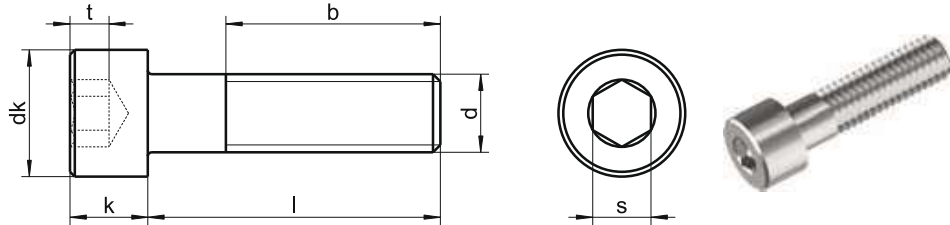


dk max.	8,28	9,78	12,73	15,73	17,73	20,67	23,67	26,67
k	5,0	6,0	8,0	10,0	12,0	14,0	16,0	18,0
s	4	5	6	8	10	12	14	14
e	4,58	5,72	6,86	9,15	11,43	13,72	16,00	16,00
t	2,5	3,0	4,0	5,0	6,0	7,0	8,0	9,0
●	4	5	6	8	10	12	14	14
Long. / Ø	M5	M6	M8	M10	M12	M14	M16	M18
80	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
85	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
90	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
95	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
100	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
110		▲●	▲●	▲●	▲●	▲●	▲●	▲●
120		▲●	▲●	▲●	▲●	▲●	▲●	▲●
130		▲●	▲●	▲●	▲●	▲●	▲●	▲●
140		▲●	▲●	▲●	▲●	▲●	▲●	▲●
150		▲●	▲●	▲●	▲●	▲●	▲●	▲●
160		▲●	▲●	▲●	▲●	▲●	▲●	▲●
170		▲●	▲●	▲●	▲●	▲●	▲●	▲●
180		▲●	▲●	▲●	▲●	▲●	▲●	▲●
190		▲●	▲●	▲●	▲●	▲●	▲●	▲●
200		▲●	▲●	▲●	▲●	▲●	▲●	▲●
210			▲●	▲●	▲●			
220			▲●	▲●	▲●			
230			▲●	▲●	▲●			
240			▲●	▲●	▲●			
250			▲●	▲●	▲●			
260			▲●	▲●	▲●			
270			▲●	▲●	▲●			
280			▲●	▲●	▲●			
300			▲●	▲●	▲●			
UV	200	100	100 ≥ 95 50	50	50 ≥ 100 25	25	25	25

■ A1 / ▲ A2 / ● A4 | UV: Unité de vente | Toutes dimensions en mm | Autres dimensions sur demande
 Exemple Art.-Numéro.: 912-2-8X40 DIN 912 - A2 - M8 - l = 40mm

DIN 912 - Page 3 - sim. ISO 4762

Vis à métaux tête cylindrique

six pans creux -CHC

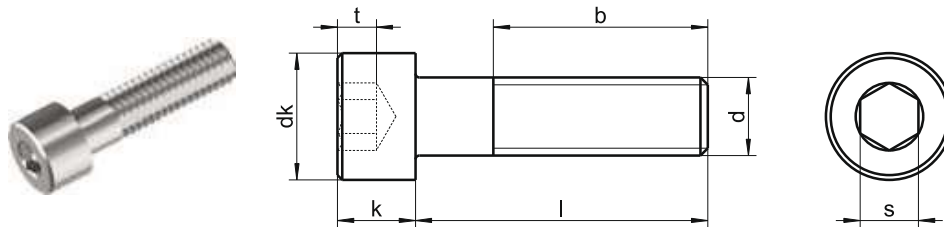

dk max.	29,67	35,61	39,61	44,61
k	19,48	23,48	26,48	29,48
s	17	19	19	22
e	19,44	21,73	21,73	25,15
t	10,0	12,0	13,5	15,5
●	17	19	19	22
Long. / Ø	M20	M24	M27	M30
30	▲ ●			
35	▲ ●			
40	▲ ●	▲ ●		
45	▲ ●	▲ ●		
50	▲ ●	▲ ●	▲ ●	▲ ●
55	▲ ●	▲ ●	▲ ●	▲ ●
60	▲ ●	▲ ●	▲ ●	▲ ●
65	▲ ●	▲ ●	▲ ●	▲ ●
70	▲ ●	▲ ●	▲ ●	▲ ●
75	▲ ●	▲ ●	▲ ●	▲ ●
80	▲ ●	▲ ●	▲ ●	▲ ●
85	▲ ●	▲ ●	▲ ●	▲ ●
90	▲ ●	▲ ●	▲ ●	▲ ●
95	▲ ●	▲ ●	▲ ●	▲ ●
100	▲ ●	▲ ●	▲ ●	▲ ●
110	▲ ●	▲ ●	▲ ●	▲ ●
120	▲ ●	▲ ●	▲ ●	▲ ●
130	▲ ●	▲ ●	▲ ●	▲ ●
140	▲ ●	▲ ●	▲ ●	▲ ●
150	▲ ●	▲ ●	▲ ●	▲ ●
160	▲ ●	▲ ●	▲ ●	▲ ●
170	▲ ●	▲ ●	▲ ●	▲ ●
180	▲ ●	▲ ●	▲ ●	▲ ●
190	▲ ●	▲ ●	▲ ●	▲ ●
200	▲ ●	▲ ●	▲ ●	▲ ●
UV	25 ≥ 100 10	10 ≥ 140 5	5	5

■ A1 / ▲ A2 / ● A4 | UV: Unité de vente | Toutes dimensions en mm | Autres dimensions sur demande
Exemple Art.-Numéro.: 912-2-8X40 DIN 912 - A2 - M8 - l = 40mm