

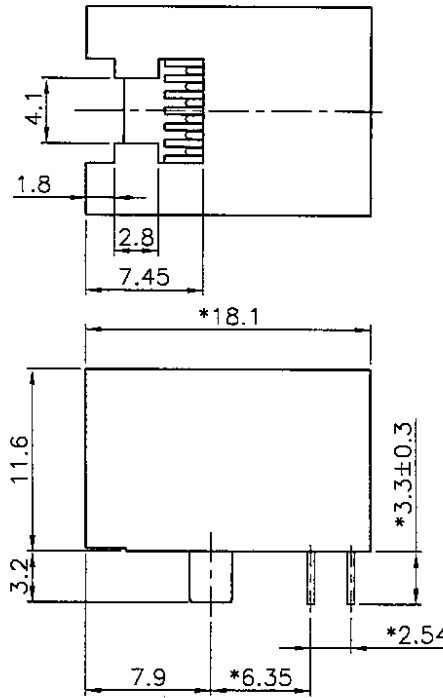
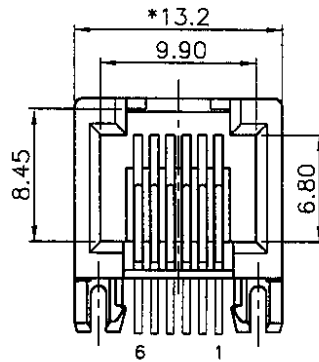


PC Board Layout t=1.60mm
Component Side Shown

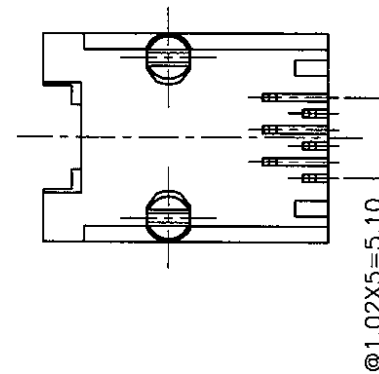

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		ADD P/N	DRUM	
△		ADD P/N	HERO	
△		ADD P/N	JMAYN	
△		ADD P/N	ANKUE	

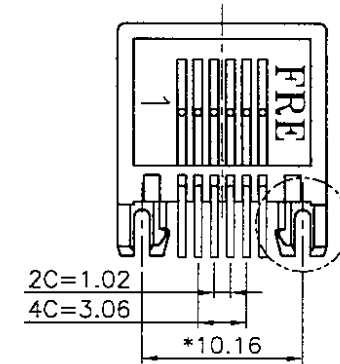

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 150 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : FR50&PBT+30% .G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 230~250°C (5~10 SECONDS)

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E536X-300XXX-L

- 2- 2C
- 4- 4C
- 6- 6C
- 1- 3u" 2- 6u" 3- 15u"
- 4- 30u" 5- 50u"

MATERIAL OF HS'G :

- 0G-PBT BK.
- 4G-FR50 BK
- △ JG-PBT+30%.G.F WHITE (PBT NATURAL COLOR)
- △ AG-PBT+30%.G.F. PANTON RED 186C
- △ GC-PBT+30%.G.F. PANTON GREEN 7479C
- △ EH-PBT+30%.G.F. PANTON YELLOW 114C

DETACHED LISTS	MM (INCH)	DFTO CXQ	DATE 04/12/05	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE	TITLE	
	.0 ± 0.2	MFO	DATE	11.5mm SIDE PCB JACK 6P	
	.00 ± 0.15	APP	DATE	DRAWING NO. GE533022-LC	SIZE REV
.000 ± 0.075			/PART NO. SEE NOTE	A3 4	
ANGLES ± 0.5	QTY :	DO NOT SCALE DRAWING		SHEET 1 OF 1	
THIRD ANGLE PROJECTION	FINISH :				
	SCALE : 3 : 1				