

Voltage Step-up Coils

Japan

Series: **Chip**
Type: **3KN**



High inductance Voltage Step-up coil chip series for piezo-electric buzzer and DC-DC circuit of EL

ELT3KN

Industrial Property: Patents 3 (pending)


■ Features

- Small and thin
- High inductance

■ Recommended Applications

- Watches, Toys, Camera, Electronic thermometers
- Pagers, PHS, Portable telephones

■ Explanation of part Numbers

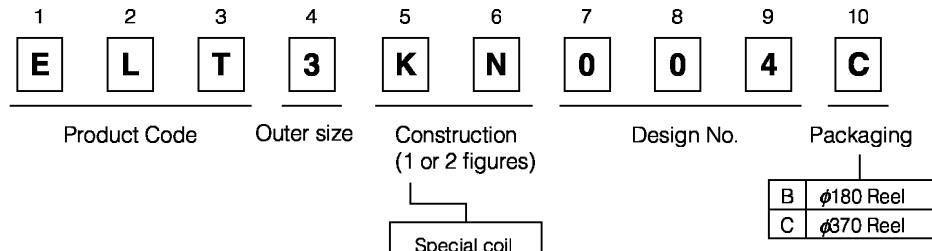


■ Standard Packing Quantity

- 1000 or 5000 pcs./Reel

■ Dimensions in mm (not to scale)

- Type 3KN

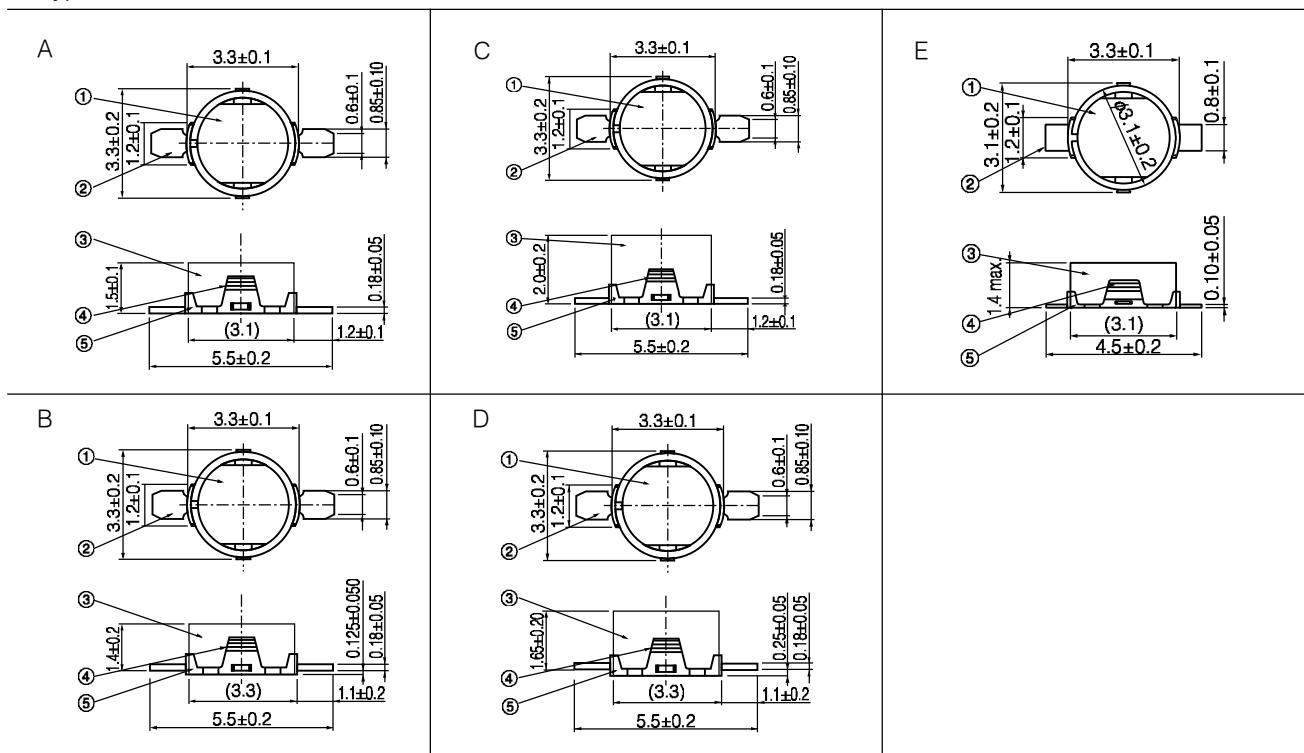

Part Name: ① Core ② Terminal ③Ring ④ Coil ⑤ Terminal board

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Examples

Part No.	Inductance		R. D. C		I.D.C (mA) max.	Dimensions	Magnetic Composition
	(mH)	Tolerance(%)	(Ω)	Tolerance(%)			
ELT3KN004□	14.00	± 40	125	± 10	1.7	A	Permalloy ring
ELT3KN007□	20.00		170		1.4		
ELT3KN113□	1.00	± 10	34	± 15	25.0	B	Brass ring
ELT3KN126□	1.50		49		29.0		
ELT3KN019□	14.00	± 40	125	± 10	1.7	B	Permalloy ring
ELT3KN109□	3.80	± 10	115	± 20	15.0		Brass ring
ELT3KN114□	2.50		83	± 15	15.0	C	
ELT3KN014□	30.00	± 40	150		1.9	Permalloy ring	Brass ring
ELT3KN018□	35.00		235	± 10	1.9		
ELT3KN028□	50.00	± 35	250	± 15	1.4	C	Permalloy ring
ELT3KN032□	25.00	± 40	185		10.0		
ELT3KN101□	10.00	± 10	285	± 10	1.4	C	Brass ring
ELT3KN104□	1.00		35		3.5		
ELT3KN118□	2.50		64		20.0		
ELT3KN122□	2.00		44		20.0		
ELT3KN127□	0.47		14		50.0		
ELT3KN128□	0.56		15		45.0		
ELT3KN129□	0.68		17		34.0		
ELT3KN130□	2.30		51		23.0		
ELT3KN020□	30.00	± 30	150		1.9	D	Permalloy ring
ELT3KN111□	7.50	± 10	177		10.0		Brass ring
ELT3KN125□	4.00		85		15.0		
ELT3KN041□	14.00	± 40	125	± 10	1.7	E	Permalloy ring
ELT3KN042□	20.00		175		1.4		
ELT3KN043□	12.00		113		1.7		
ELT3KN139□	0.68	± 10	19	± 15	40.0		Brass ring
ELT3KN140□	0.82		22		30.0		
ELT3KN135□	1.10		32		30.0		
ELT3KN136□	2.00		55		20.0		
ELT3KN137□	4.00		117	± 10	15.0		

"□" shows the packaging method.