

## UNIVERSAL 9 VOLT BATTERY HOLDERS



1294





1295

### SPECIFICATIONS

**Body:** Molded from high impact, Glass Filled Nylon


**Terminals:** Brass, Tin Plate

**Contacts:** Steel, Nickel Plate

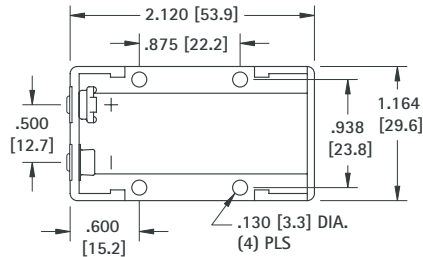


CAT. NO. 1294

PC Terminals



CAT. NO. 1295

Quick-Fit Terminals



Holds any size, any shape, standard 9 Volt battery. Eliminates need to specify an exact battery brand, size or shape. Ideal for power source or memory back-up use in PLC, telecommunications, data processing, security systems, clocks, radios, toys and appliances.


- Male-female snap-in terminals assure positive contact and proper polarity
- Durable, rugged construction
- Excellent spring retention – holds battery in place
- Withstands severe shock and vibration
- Operating temperature range: -40°F to +266°F (-40°C to +130°C)
- Impervious to most industrial solvents

## 9 VOLT SNAP-IN BATTERY HOLDERS

For use with standard 9 Volt battery. Battery snaps in place to insure positive contact. Ideal where severe shock and vibration are encountered. Available with standard solder lugs or printed circuit lugs.



1290-79



1291-79

### SPECIFICATIONS

**Frame:** Aluminum


**Solder Lugs:** Brass, Tin Plate

**PC Lugs:** Brass, Tin Plate

**Contacts & Clips:** Steel, Nickel Plate

**Insulation:** Resin Impregnated


**Polarizing Washer:** Polyethylene

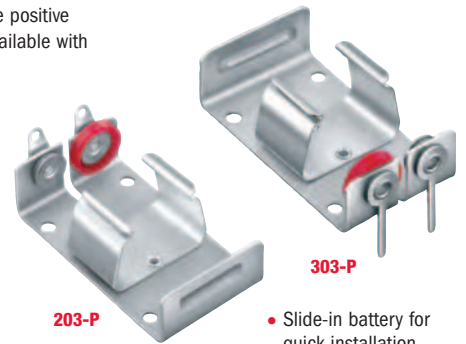




203-P

303-P

- Slide-in battery for quick installation and replacement
- Polarity clearly marked

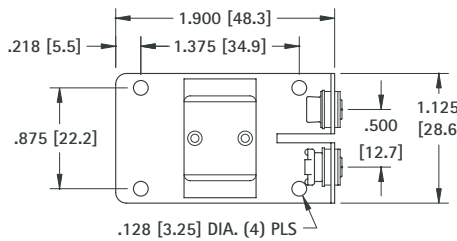


### Mounting Detail

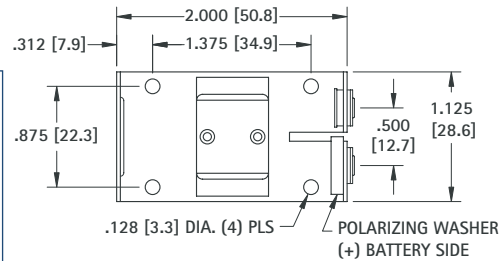


CAT. NO. 1290-79

Solder Lugs




CAT. NO. 1291-79

PC Lugs



CAT. NO. 203-P

Solder Lugs



CAT. NO. 303-P

PC Lugs

NOTE: For battery thicknesses under .640 (16.3); specify Cat. No. 1290 or 1291.