

# LM7171 Very High Speed, High Output Current, Voltage Feedback Amplifier

## General Description

The LM7171 is a high speed voltage feedback amplifier that has the slewing characteristic of a current feedback amplifier; yet it can be used in all traditional voltage feedback amplifier configurations. The LM7171 is stable for gains as low as +2 or -1. It provides a very high slew rate at 4100V/ $\mu$ s and a wide unity-gain bandwidth of 200 MHz while consuming only 6.5 mA of supply current. It is ideal for video and high speed signal processing applications such as HDSL and pulse amplifiers. With 100 mA output current, the LM7171 can be used for video distribution, as a transformer driver or as a laser diode driver.

Operation on  $\pm 15$ V power supplies allows for large signal swings and provides greater dynamic range and signal-to-noise ratio. The LM7171 offers low SFDR and THD, ideal for ADC/DAC systems. In addition, the LM7171 is specified for  $\pm 5$ V operation for portable applications.

The LM7171 is built on National's advanced VIPTM III (Vertically integrated PNP) complementary bipolar process.


## Features (Typical Unless Otherwise Noted)

- Easy-To-Use Voltage Feedback Topology
- Very High Slew Rate 4100V/ $\mu$ s
- Wide Unity-Gain Bandwidth 200 MHz
- -3 dB Frequency @  $A_V = +2$  220 MHz
- Low Supply Current 6.5 mA
- High Open Loop Gain 85 dB
- High Output Current 100 mA
- Differential Gain and Phase 0.01%, 0.02°
- Specified for  $\pm 15$ V and  $\pm 5$ V Operation



## Applications

- HDSL and ADSL Drivers
- Multimedia Broadcast Systems
- Professional Video Cameras
- Video Amplifiers
- Copiers/Scanners/Fax
- HDTV Amplifiers
- Pulse Amplifiers and Peak Detectors
- CATV/Fiber Optics Signal Processing

## Typical Performance



## Connection Diagrams



## Ordering Information

| Package              | Temperature Range            |                             | Transport Media | NSC Drawing |
|----------------------|------------------------------|-----------------------------|-----------------|-------------|
|                      | Industrial<br>-40°C to +85°C | Military<br>-55°C to +125°C |                 |             |
| 8-Pin DIP            | LM7171AIN, LM7171BIN         |                             | Rails           | N08E        |
| 8-Pin CDIP           |                              | 5962-9553601QPA*            | Rails           | J08A        |
| 8-Pin Small Outline  | LM7171AIM, LM7171BIM         |                             | Rails           | M08A        |
|                      | LM7171AIMX, LM7171BIMX       |                             | Tape and Reel   |             |
| 16-Pin Small Outline | LM7171AIWM, LM7171BIWM       |                             | Rails           | M16B        |
|                      | LM7171AWMX, LM7171BWMX       |                             | Tape and Reel   |             |

\*For the military temperature grade, please refer to the Military Datasheet: MNL7171AM-X  
 NSID for the military temperature grade is LM7171AMJ/883.

VIPTM is a trademark of National Semiconductor Corporation.

**LM7171 Very High Speed, High Output Current, Voltage Feedback Amplifier**

### Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|   |   |
|---|---|
| ESD Tolerance (Note 2)                  | 2.5 kV                                      |
| Supply Voltage ( $V^+ - V^-$ )          | 36V   |
| Differential Input Voltage (Note 11)    | $\pm 10V$                                   |
| Output Short Circuit to Ground (Note 3) | Continuous                                  |
| Storage Temperature Range               | $-65^\circ\text{C}$ to $+150^\circ\text{C}$ |
| Maximum Junction Temperature (Note 4)   | $150^\circ\text{C}$                         |

### Operating Ratings (Note 1)

|  |   |
|--|---|
| Supply Voltage                                   | $5.5V \leq V_S \leq 36V$                            |
| Junction Temperature Range<br>LM7171AI, LM7171BI | $-40^\circ\text{C} \leq T_J \leq +85^\circ\text{C}$ |
| Thermal Resistance ( $\theta_{JA}$ )             |   |
| N Package, 8-Pin Molded DIP                      | $108^\circ\text{C}/\text{W}$                        |
| M Package, 8-Pin Surface Mount                   | $172^\circ\text{C}/\text{W}$                        |
| M Package, 16-Pin Surface Mount                  | $95^\circ\text{C}/\text{W}$                         |

**$\pm 15V$  DC Electrical Characteristics** Unless otherwise specified, all limits guaranteed for  $T_J = 25^\circ\text{C}$ ,  $V^+ = +15V$ ,  $V^- = -15V$ ,  $V_{CM} = 0V$ , and  $R_L = 1\text{ k}\Omega$ . **Boldface** limits apply at the temperature extremes

| Symbol       | Parameter                             | Conditions                  | Typ<br>(Note 5) | LM7171AI<br>Limit<br>(Note 6) | LM7171BI<br>Limit<br>(Note 6) | Units                        |
|--------------|---------------------------------------|-----------------------------|-----------------|-------------------------------|-------------------------------|------------------------------|
| $V_{OS}$     | Input Offset Voltage                  |                             | 0.2             | 1<br><b>4</b>                 | 3<br><b>7</b>                 | mV<br>max                    |
| $TC\ V_{OS}$ | Input Offset Voltage<br>Average Drift |                             | 35              |                               |                               | $\mu\text{V}/^\circ\text{C}$ |
| $I_B$        | Input Bias Current                    |                             | 2.7             | 10<br><b>12</b>               | 10<br><b>12</b>               | $\mu\text{A}$<br>max         |
| $I_{OS}$     | Input Offset Current                  |                             | 0.1             | 4<br><b>6</b>                 | 4<br><b>6</b>                 | $\mu\text{A}$<br>max         |
| $R_{IN}$     | Input Resistance                      | Common Mode                 | 40              |                               |                               | M $\Omega$                   |
|              |                                       | Differential Mode           | 3.3             |                               |                               |                              |
| $R_O$        | Open Loop Output<br>Resistance        |                             | 15              |                               |                               | $\Omega$                     |
| CMRR         | Common Mode<br>Rejection Ratio        | $V_{CM} = \pm 10V$          | 105             | 85<br><b>80</b>               | 75<br><b>70</b>               | dB<br>min                    |
| PSRR         | Power Supply<br>Rejection Ratio       | $V_S = \pm 15V$ to $\pm 5V$ | 90              | 85<br><b>80</b>               | 75<br><b>70</b>               | dB<br>min                    |
| $V_{CM}$     | Input Common-Mode<br>Voltage Range    | CMRR > 60 dB                | $\pm 13.35$     |                               |                               | V                            |
| $A_V$        | Large Signal Voltage<br>Gain (Note 7) | $R_L = 1\text{ k}\Omega$    | 85              | 80<br><b>75</b>               | 75<br><b>70</b>               | dB<br>min                    |
|              |                                       | $R_L = 100\Omega$           | 81              | 75<br><b>70</b>               | 70<br><b>66</b>               | dB<br>min                    |
| $V_O$        | Output Swing                          | $R_L = 1\text{ k}\Omega$    | 13.3            | 13<br><b>12.7</b>             | 13<br><b>12.7</b>             | V<br>min                     |
|              |                                       |                             | -13.2           | -13<br><b>-12.7</b>           | -13<br><b>-12.7</b>           | V<br>max                     |
|              |                                       | $R_L = 100\Omega$           | 11.8            | 10.5<br><b>9.5</b>            | 10.5<br><b>9.5</b>            | V<br>min                     |
|              |                                       |                             | -10.5           | -9.5<br><b>-9</b>             | -9.5<br><b>-9</b>             | V<br>max                     |

**± 15V DC Electrical Characteristics** (Continued) Unless otherwise specified, all limits guaranteed for  $T_J = 25^\circ\text{C}$ ,  $V^+ = +15\text{V}$ ,  $V^- = -15\text{V}$ ,  $V_{CM} = 0\text{V}$ , and  $R_L = 1\text{ k}\Omega$ . **Boldface** limits apply at the temperature extremes

| Symbol   | Parameter                                 | Conditions                  | Typ<br>(Note 5) | LM7171AI<br>Limit<br>(Note 6) | LM7171BI<br>Limit<br>(Note 6) | Units     |
|----------|---|-----------------------------|-----------------|-------------------------------|-------------------------------|-----------|
|          | Output Current<br>(Open Loop)<br>(Note 8) | Sourcing, $R_L = 100\Omega$ | 118             | 105<br><b>95</b>              | 105<br><b>95</b>              | mA<br>min |
|          |   | Sinking, $R_L = 100\Omega$  | 105             | 95<br><b>90</b>               | 95<br><b>90</b>               | mA<br>max |
|          | Output Current<br>(in Linear Region)      | Sourcing, $R_L = 100\Omega$ | 100             |                               |                               | mA        |
|          |   | Sinking, $R_L = 100\Omega$  | 100             |                               |                               |           |
| $I_{SC}$ | Output Short Circuit<br>Current           | Sourcing                    | 140             |                               |                               | mA        |
|          |   | Sinking                     | 135             |                               |                               |           |
| $I_S$    | Supply Current                            |                             | 6.5             | 8.5<br><b>9.5</b>             | 8.5<br><b>9.5</b>             | mA<br>max |

**± 15V AC Electrical Characteristics** Unless otherwise specified,  $T_J = 25^\circ\text{C}$ ,  $V^+ = +15\text{V}$ ,  $V^- = -15\text{V}$ ,  $V_{CM} = 0\text{V}$ , and  $R_L = 1\text{ k}\Omega$ .

| Symbol   | Parameter                       | Conditions   | Typ<br>(Note 5) | LM7171AI<br>Limit<br>(Note 6) | LM7171BI<br>Limit<br>(Note 6) | Units                                |
|----------|---------------------------------|--|-----------------|-------------------------------|-------------------------------|--------------------------------------|
| SR       | Slew Rate (Note 9)              | $A_V = +2$ , $V_{IN} = 13\text{ V}_{PP}$                     | 4100            |                               |                               | $\text{V}/\mu\text{s}$               |
|          |                                 | $A_V = +2$ , $V_{IN} = 10\text{ V}_{PP}$                     | 3100            |                               |                               |                                      |
|          | Unity-Gain Bandwidth            |  | 200             |                               |                               | MHz                                  |
|          | -3 dB Frequency                 | $A_V = +2$   | 220             |                               |                               | MHz                                  |
| $\phi_m$ | Phase Margin                    |  | 50              |                               |                               | Deg                                  |
| $t_s$    | Settling Time (0.1%)            | $A_V = -1$ , $V_O = \pm 5\text{V}$<br>$R_L = 500\Omega$      | 42              |                               |                               | ns                                   |
| $t_p$    | Propagation Delay               | $A_V = -2$ , $V_{IN} = \pm 5\text{V}$ ,<br>$R_L = 500\Omega$ | 5               |                               |                               | ns                                   |
| $A_D$    | Differential Gain (Note 10)     |  | 0.01            |                               |                               | %                                    |
| $\phi_D$ | Differential Phase (Note 10)    |  | 0.02            |                               |                               | Deg                                  |
|          | Second Harmonic (Note 12)       | $f_{IN} = 10\text{ kHz}$                                     | -110            |                               |                               | dBc                                  |
|          |                                 | $f_{IN} = 5\text{ MHz}$                                      | -75             |                               |                               | dBc                                  |
|          | Third Harmonic (Note 12)        | $f_{IN} = 10\text{ kHz}$                                     | -115            |                               |                               | dBc                                  |
|          |                                 | $f_{IN} = 5\text{ MHz}$                                      | -55             |                               |                               | dBc                                  |
| $e_n$    | Input-Referred<br>Voltage Noise | $f = 10\text{ kHz}$  | 14              |                               |                               | $\frac{\text{nV}}{\sqrt{\text{Hz}}}$ |
| $i_n$    | Input-Referred<br>Current Noise | $f = 10\text{ kHz}$  | 1.5             |                               |                               | $\frac{\text{pA}}{\sqrt{\text{Hz}}}$ |

**±5V DC Electrical Characteristics** Unless otherwise specified, all limits guaranteed for  $T_J = 25^\circ\text{C}$ ,  $V^+ = +5\text{V}$ ,  $V^- = -5\text{V}$ ,  $V_{CM} = 0\text{V}$ , and  $R_L = 1\text{ k}\Omega$ . **Boldface** limits apply at the temperature extremes

| Symbol      | Parameter                              | Conditions                               | Typ<br>(Note 5) | LM7171AI<br>Limit<br>(Note 6) | LM7171BI<br>Limit<br>(Note 6) | Units                        |
|-------------|--|--|-----------------|-------------------------------|-------------------------------|------------------------------|
| $V_{OS}$    | Input Offset Voltage                   |  | 0.3             | 1.5<br><b>4</b>               | 3.5<br><b>7</b>               | mV<br>max                    |
| $TC V_{OS}$ | Input Offset Voltage<br>Average Drift  |  | 35              |                               |                               | $\mu\text{V}/^\circ\text{C}$ |
| $I_B$       | Input Bias Current                     |  | 3.3             | 10<br><b>12</b>               | 10<br><b>12</b>               | $\mu\text{A}$<br>max         |
| $I_{OS}$    | Input Offset Current                   |  | 0.1             | 4<br><b>6</b>                 | 4<br><b>6</b>                 | $\mu\text{A}$<br>max         |
| $R_{IN}$    | Input Resistance                       | Common Mode                              | 40              |                               |                               | M $\Omega$                   |
|             |  | Differential Mode                        | 3.3             |                               |                               |                              |
| $R_O$       | Output Resistance                      |  | 15              |                               |                               | $\Omega$                     |
| CMRR        | Common Mode<br>Rejection Ratio         | $V_{CM} = \pm 2.5\text{V}$               | 104             | 80<br><b>75</b>               | 70<br><b>65</b>               | dB<br>min                    |
| PSRR        | Power Supply<br>Rejection Ratio        | $V_S = \pm 15\text{V to } \pm 5\text{V}$ | 90              | 85<br><b>80</b>               | 75<br><b>70</b>               | dB<br>min                    |
| $V_{CM}$    | Input Common-Mode<br>Voltage Range     | CMRR > 60 dB                             | $\pm 3.2$       |                               |                               | V                            |
| $A_v$       | Large Signal Voltage<br>Gain (Note 7)  | $R_L = 1\text{ k}\Omega$                 | 78              | 75<br><b>70</b>               | 70<br><b>65</b>               | dB<br>min                    |
|             |  | $R_L = 100\Omega$                        | 76              | 72<br><b>67</b>               | 68<br><b>63</b>               | dB<br>min                    |
| $V_O$       | Output Swing                           | $R_L = 1\text{ k}\Omega$                 | 3.4             | 3.2<br><b>3</b>               | 3.2<br><b>3</b>               | V<br>min                     |
|             |  |  | -3.4            | -3.2<br><b>-3</b>             | -3.2<br><b>-3</b>             | V<br>max                     |
|             |  | $R_L = 100\Omega$                        | 3.1             | 2.9<br><b>2.8</b>             | 2.9<br><b>2.8</b>             | V<br>min                     |
|             |  |  | -3.0            | -2.9<br><b>-2.8</b>           | -2.9<br><b>-2.8</b>           | V<br>max                     |
|             | Output Current<br>(Open Loop) (Note 8) | Sourcing, $R_L = 100\Omega$              | 31              | 29<br><b>28</b>               | 29<br><b>28</b>               | mA<br>min                    |
|             |  | Sinking, $R_L = 100\Omega$               | 30              | 29<br><b>28</b>               | 29<br><b>28</b>               | mA<br>max                    |
| $I_{SC}$    | Output Short Circuit<br>Current        | Sourcing                                 | 135             |                               |                               | mA                           |
|             |  | Sinking                                  | 100             |                               |                               |                              |
| $I_S$       | Supply Current                         |  | 6.2             | 8<br><b>9</b>                 | 8<br><b>9</b>                 | mA<br>max                    |

**± 5V AC Electrical Characteristics** Unless otherwise specified,  $T_J = 25^\circ\text{C}$ ,  $V^+ = +5\text{V}$ ,  $V^- = -5\text{V}$ ,  $V_{CM} = 0\text{V}$ , and  $R_L = 1\text{ k}\Omega$ .

| Symbol   | Parameter                    | Conditions   | Typ<br>(Note 5) | LM7171AI<br>Limit<br>(Note 6) | LM7171BI<br>Limit<br>(Note 6) | Units                                |
|----------|------------------------------|--|-----------------|-------------------------------|-------------------------------|--------------------------------------|
| SR       | Slew Rate (Note 9)           | $A_V = +2$ , $V_{IN} = 3.5\text{ V}_{PP}$                    | 950             |                               |                               | $\text{V}/\mu\text{s}$               |
|          | Unity-Gain Bandwidth         |  | 125             |                               |                               | MHz                                  |
|          | -3 dB Frequency              | $A_V = +2$   | 140             |                               |                               | MHz                                  |
| $\phi_m$ | Phase Margin                 |  | 57              |                               |                               | Deg                                  |
| $t_s$    | Settling Time (0.1%)         | $A_V = -1$ , $V_O = \pm 1\text{V}$ ,<br>$R_L = 500\Omega$    | 56              |                               |                               | ns                                   |
| $t_p$    | Propagation Delay            | $A_V = -2$ , $V_{IN} = \pm 1\text{V}$ ,<br>$R_L = 500\Omega$ | 6               |                               |                               | ns                                   |
| $A_D$    | Differential Gain (Note 10)  |  | 0.02            |                               |                               | %                                    |
| $\phi_D$ | Differential Phase (Note 10) |  | 0.03            |                               |                               | Deg                                  |
|          | Second Harmonic (Note 12)    | $f_{IN} = 10\text{ kHz}$                                     | -102            |                               |                               | dBc                                  |
|          |                              | $f_{IN} = 5\text{ MHz}$                                      | -70             |                               |                               | dBc                                  |
|          | Third Harmonic (Note 12)     | $f_{IN} = 10\text{ kHz}$                                     | -110            |                               |                               | dBc                                  |
|          |                              | $f_{IN} = 5\text{ MHz}$                                      | -51             |                               |                               | dBc                                  |
| $e_n$    | Input-Referred Voltage Noise | $f = 10\text{ kHz}$  | 14              |                               |                               | $\frac{\text{nV}}{\sqrt{\text{Hz}}}$ |
| $i_n$    | Input-Referred Current Noise | $f = 10\text{ kHz}$  | 1.8             |                               |                               | $\frac{\text{pA}}{\sqrt{\text{Hz}}}$ |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not guaranteed. For guaranteed specifications and the test conditions, see the Electrical Characteristics.

**Note 2:** Human body model, 1.5 k $\Omega$  in series with 100 pF.

**Note 3:** Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.

**Note 4:** The maximum power dissipation is a function of  $T_{J(max)}$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any ambient temperature is  $P_D = (T_{J(max)} - T_A) / \theta_{JA}$ . All numbers apply for packages soldered directly into a PC board.

**Note 5:** Typical values represent the most likely parametric norm.

**Note 6:** All limits are guaranteed by testing or statistical analysis.

**Note 7:** Large signal voltage gain is the total output swing divided by the input signal required to produce that swing. For  $V_S = \pm 15\text{V}$ ,  $V_{OUT} = \pm 5\text{V}$ . For  $V_S = \pm 5\text{V}$ ,  $V_{OUT} = \pm 1\text{V}$ .

**Note 8:** The open loop output current is guaranteed, by the measurement of the open loop output voltage swing, using 100 $\Omega$  output load.

**Note 9:** Slew Rate is the average of the raising and falling slew rates.


**Note 10:** Differential gain and phase are measured with  $A_V = +2$ ,  $V_{IN} = 1\text{ V}_{PP}$  at 3.58 MHz and both input and output 75 $\Omega$  terminated.

**Note 11:** Input differential voltage is applied at  $V_S = \pm 15\text{V}$ .

**Note 12:** Harmonics are measured with  $V_{IN} = 1\text{ V}_{PP}$ ,  $A_V = +2$  and  $R_L = 100\Omega$ .


**Typical Performance Characteristics** unless otherwise noted,  $T_A = 25^\circ\text{C}$

**Supply Current vs Supply Voltage**




TL/H/12385-63

**Supply Current vs Temperature**




TL/H/12385-64

**Input Offset Voltage vs Temperature**




TL/H/12385-65

**Input Bias Current vs Temperature**




TL/H/12385-66

**Short Circuit Current vs Temperature (Sourcing)**




TL/H/12385-67

**Short Circuit Current vs Temperature (Sinking)**




TL/H/12385-68

**Output Voltage vs Output Current**




TL/H/12385-69

**Output Voltage vs Output Current**

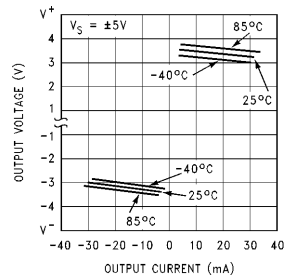


TL/H/12385-70

**CMRR vs Frequency**




TL/H/12385-71

**PSRR vs Frequency**















TL/H/12385-72

**PSRR vs Frequency**















TL/H/12385-73

# Typical Performance Characteristics (Continued) unless otherwise noted, $T_A = 25^\circ\text{C}$


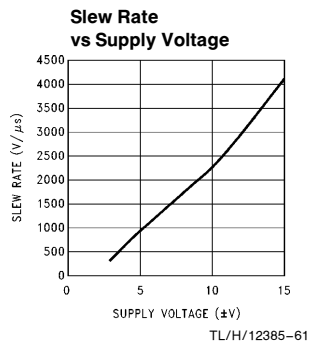
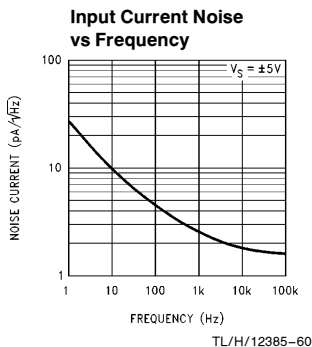








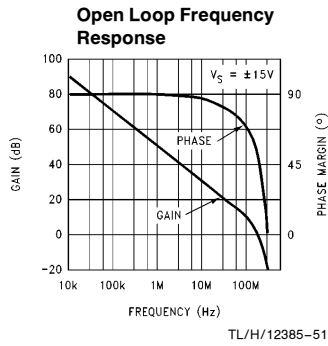


# Typical Performance Characteristics (Continued) unless otherwise noted, $T_A = 25^\circ\text{C}$

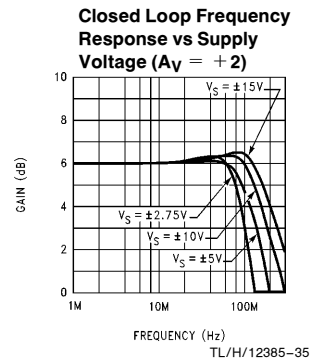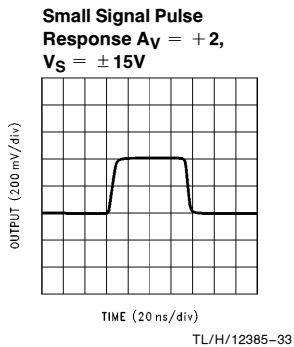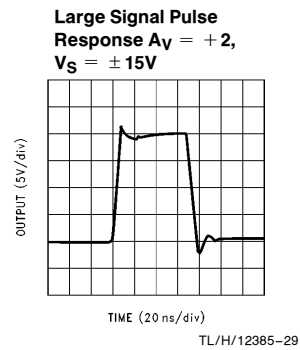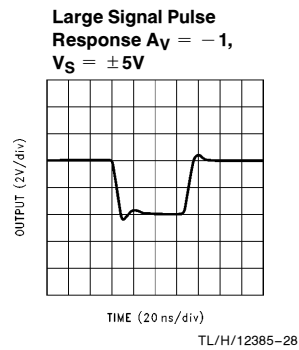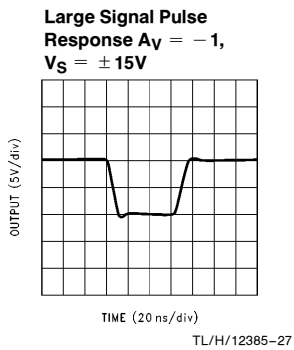




**Typical Performance Characteristics** (Continued) unless otherwise noted,  $T_A = 25^\circ\text{C}$

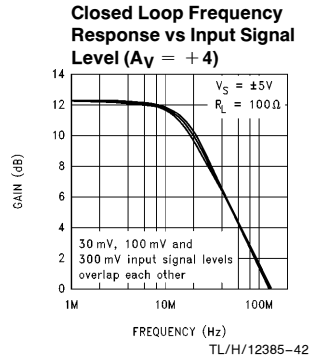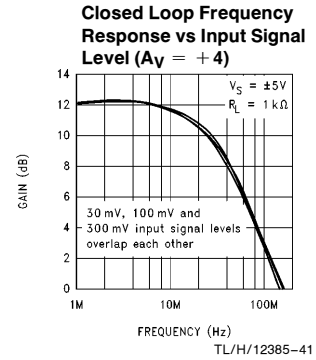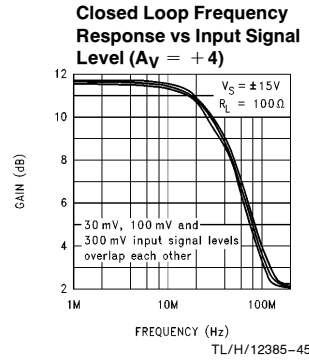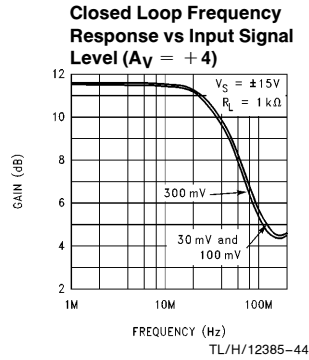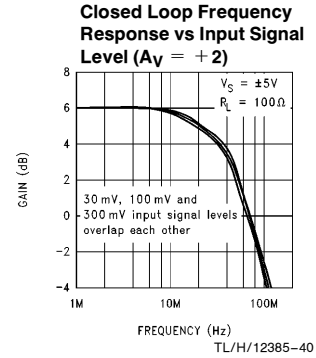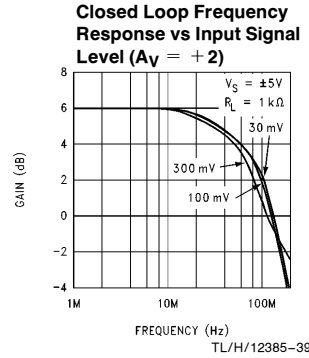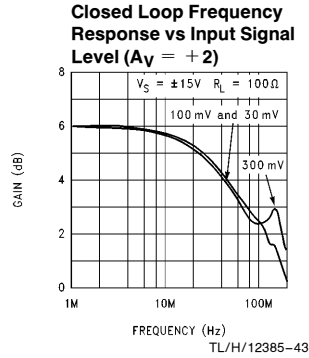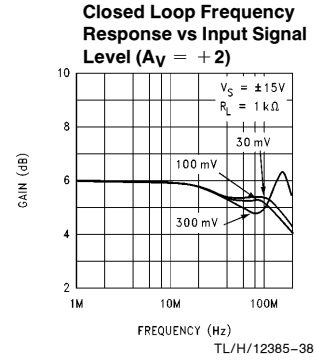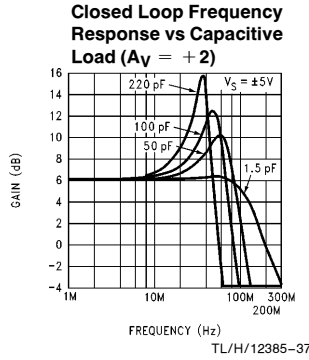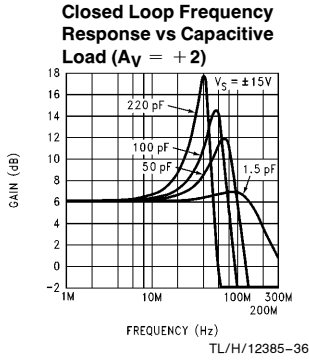

(\*) The THD measurement at low frequency is limited by the test instrument.


**Typical Performance Characteristics** (Continued) unless otherwise noted,  $T_A = 25^\circ\text{C}$

**Undistorted Output Swing vs Frequency**




TL/H/12385-49

**Undistorted Output Swing vs Frequency**




TL/H/12385-48

**Undistorted Output Swing vs Frequency**

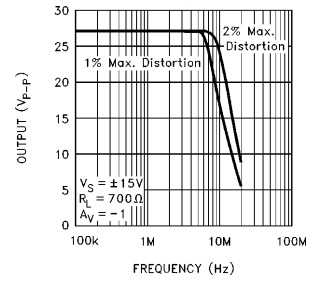


TL/H/12385-50

**Harmonic Distortion vs Frequency**




TL/H/12385-74

**Harmonic Distortion vs Frequency**

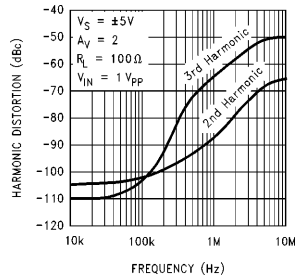

TL/H/12385-75


**Maximum Power Dissipation vs Ambient Temperature**



TL/H/12385-20

(\*) The THD measurement at low frequency is limited by the test instrument.

**Simplified Schematic Diagram**

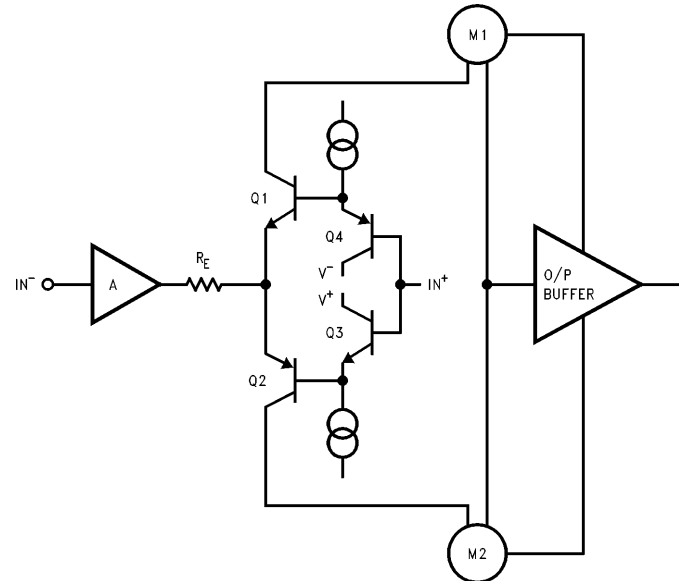

TL/H/12385-9

**Note:** M1 and M2 are current mirrors.

## Application Notes

### LM7171 Performance Discussion

The LM7171 is a very high speed, voltage feedback amplifier. It consumes only 6.5 mA supply current while providing a unity-gain bandwidth of 200 MHz and a slew rate of 4100V/ $\mu$ s. It also has other great features such as low differential gain and phase and high output current.

The LM7171 is a true voltage feedback amplifier. Unlike current feedback amplifiers (CFAs) with a low inverting input impedance and a high non-inverting input impedance, both inputs of voltage feedback amplifiers (VFAs) have high impedance nodes. The low impedance inverting input in CFAs and a feedback capacitor create an additional pole that will lead to instability. As a result, CFAs cannot be used in traditional op amp circuits such as photodiode amplifiers, I-to-V converters and integrators where a feedback capacitor is required.

### LM7171 Circuit Operation

The class AB input stage in LM7171 is fully symmetrical and has a similar slewing characteristic to the current feedback amplifiers. In the LM7171 Simplified Schematic, Q1 through Q4 form the equivalent of the current feedback input buffer,  $R_E$  the equivalent of the feedback resistor, and stage A buffers the inverting input. The triple-buffered output stage isolates the gain stage from the load to provide low output impedance.

### LM7171 Slew Rate Characteristic

The slew rate of LM7171 is determined by the current available to charge and discharge an internal high impedance node capacitor. This current is the differential input voltage divided by the total degeneration resistor  $R_E$ . Therefore, the slew rate is proportional to the input voltage level, and the higher slew rates are achievable in the lower gain configurations. A curve of slew rate versus input voltage level is provided in the "Typical Performance Characteristics".

When a very fast large signal pulse is applied to the input of an amplifier, some overshoot or undershoot occurs. By placing an external resistor such as 1 k $\Omega$  in series with the input of LM7171, the bandwidth is reduced to help lower the overshoot.

### Slew Rate Limitation

If the amplifier's input signal has too large of an amplitude at too high of a frequency, the amplifier is said to be slew rate limited; this can cause ringing in time domain and peaking in frequency domain at the output of the amplifier.

In the "Typical Performance Characteristics" section, there are several curves of  $A_V = +2$  and  $A_V = +4$  versus input signal levels. For the  $A_V = +4$  curves, no peaking is present and the LM7171 responds identically to the different input signal levels of 30 mV, 100 mV and 300 mV.

For the  $A_V = +2$  curves, with slight peaking occurs. This peaking at high frequency (> 100 MHz) is caused by a large input signal at high enough frequency that exceeds the amplifier's slew rate. The peaking in frequency response does not limit the pulse response in time domain, and the LM7171 is stable with noise gain of  $\geq +2$ .

## Layout Consideration

### PRINTED CIRCUIT BOARDS AND HIGH SPEED OP AMPS

There are many things to consider when designing PC boards for high speed op amps. Without proper caution, it is very easy to have excessive ringing, oscillation and other degraded AC performance in high speed circuits. As a rule, the signal traces should be short and wide to provide low inductance and low impedance paths. Any unused board space needs to be grounded to reduce stray signal pickup. Critical components should also be grounded at a common point to eliminate voltage drop. Sockets add capacitance to the board and can affect high frequency performance. It is better to solder the amplifier directly into the PC board without using any socket.

### USING PROBES

Active (FET) probes are ideal for taking high frequency measurements because they have wide bandwidth, high input impedance and low input capacitance. However, the probe ground leads provide a long ground loop that will produce errors in measurement. Instead, the probes can be grounded directly by removing the ground leads and probe jackets and using scope probe jacks.

### COMPONENT SELECTION AND FEEDBACK RESISTOR

It is important in high speed applications to keep all component leads short. For discrete components, choose carbon composition-type resistors and mica-type capacitors. Surface mount components are preferred over discrete components for minimum inductive effect.


Large values of feedback resistors can couple with parasitic capacitance and cause undesirable effects such as ringing or oscillation in high speed amplifiers. For LM7171, a feedback resistor of 510 $\Omega$  gives optimal performance.

### Compensation for Input Capacitance

The combination of an amplifier's input capacitance with the gain setting resistors adds a pole that can cause peaking or oscillation. To solve this problem, a feedback capacitor with a value

$$C_F > (R_G \times C_{IN})/R_F$$

can be used to cancel that pole. For LM7171, a feedback capacitor of 2 pF is recommended. Figure 1 illustrates the compensation circuit.

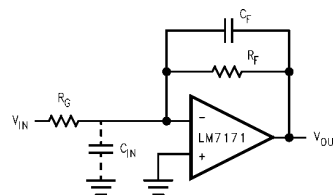


TL/H/12385-10

FIGURE 1. Compensating for Input Capacitance

## Application Notes (Continued)

### Power Supply Bypassing

Bypassing the power supply is necessary to maintain low power supply impedance across frequency. Both positive and negative power supplies should be bypassed individually by placing 0.01  $\mu\text{F}$  ceramic capacitors directly to power supply pins and 2.2  $\mu\text{F}$  tantalum capacitors close to the power supply pins.




TL/H/12385-11

FIGURE 2. Power Supply Bypassing


### Termination

In high frequency applications, reflections occur if signals are not properly terminated. *Figure 3* shows a properly terminated signal while *Figure 4* shows an improperly terminated signal.

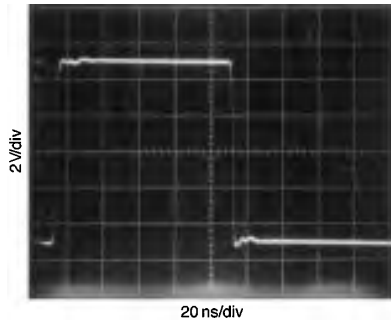

TL/H/12385-17

FIGURE 3. Properly Terminated Signal

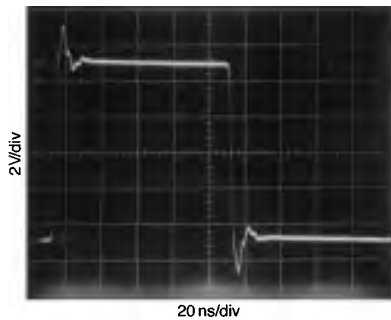


TL/H/12385-18

FIGURE 4. Improperly Terminated Signal

To minimize reflection, coaxial cable with matching characteristic impedance to the signal source should be used. The other end of the cable should be terminated with the same value terminator or resistor. For the commonly used cables, RG59 has 75 $\Omega$  characteristic impedance, and RG58 has 50 $\Omega$  characteristic impedance.


### Driving Capacitive Loads

Amplifiers driving capacitive loads can oscillate or have ringing at the output. To eliminate oscillation or reduce ringing, an isolation resistor can be placed as shown below in *Figure 5*. The combination of the isolation resistor and the load capacitor forms a pole to increase stability by adding more phase margin to the overall system. The desired performance depends on the value of the isolation resistor; the bigger the isolation resistor, the more damped the pulse response becomes. For LM7171, a 50 $\Omega$  isolation resistor is recommended for initial evaluation. *Figure 6* shows the LM7171 driving a 150 pF load with the 50 $\Omega$  isolation resistor.

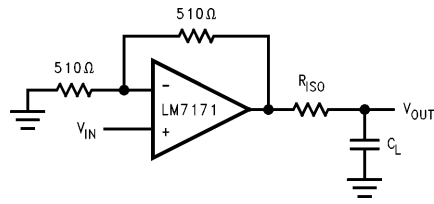

TL/H/12385-12

FIGURE 5. Isolation Resistor Used to Drive Capacitive Load

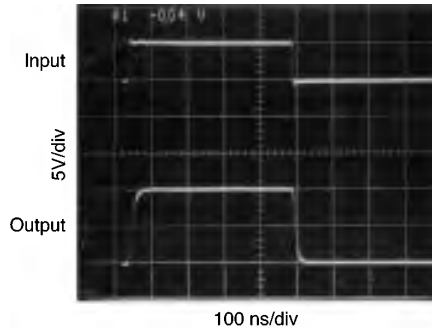

TL/H/12385-13

FIGURE 6. The LM7171 Driving a 150 pF Load with a 50 $\Omega$  Isolation Resistor

### Power Dissipation

The maximum power allowed to dissipate in a device is defined as:

$$P_D = (T_{J(\max)} - T_A) / \theta_{JA}$$

Where  $P_D$  is the power dissipation in a device  
 $T_{J(\max)}$  is the maximum junction temperature  
 $T_A$  is the ambient temperature  
 $\theta_{JA}$  is the thermal resistance of a particular package

## Application Notes (Continued)

For example, for the LM7171 in a SO-8 package, the maximum power dissipation at 25°C ambient temperature is 730 mW.

Thermal resistance,  $\theta_{JA}$ , depends on parameters such as die size, package size and package material. The smaller the die size and package, the higher  $\theta_{JA}$  becomes. The 8-pin DIP package has a lower thermal resistance (108°C/W) than that of 8-pin SO (172°C/W). Therefore, for higher dissipation capability, use an 8-pin DIP package.

The total power dissipated in a device can be calculated as:

$$P_D = P_Q + P_L$$

$P_Q$  is the quiescent power dissipated in a device with no load connected at the output.  $P_L$  is the power dissipated in the device with a load connected at the output; it is not the power dissipated by the load.

Furthermore,

$P_Q$  = supply current  $\times$  total supply voltage with no load


$P_L$  = output current  $\times$  (voltage difference between supply voltage and output voltage of the same side of supply voltage)

For example, the total power dissipated by the LM7171 with  $V_S = \pm 15V$  and output voltage of 10V into 1 k $\Omega$  is

$$\begin{aligned} P_D &= P_Q + P_L \\ &= (6.5 \text{ mA}) \times (30V) + (10 \text{ mA}) \times (15V - 10V) \\ &= 195 \text{ mW} + 50 \text{ mW} \\ &= 245 \text{ mW} \end{aligned}$$

## Application Circuit

### Fast Instrumentation Amplifier

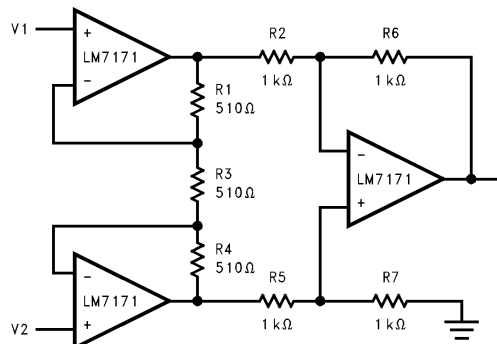


TL/H/12385-14

$$V_{IN} = V_2 - V_1$$

if  $R_6 = R_2$ ,  $R_7 = R_5$ , and  $R_1 = R_4$

$$\frac{V_{OUT}}{V_{IN}} = \frac{R_6}{R_2} \left( 1 + 2 \frac{R_1}{R_3} \right) = 3$$

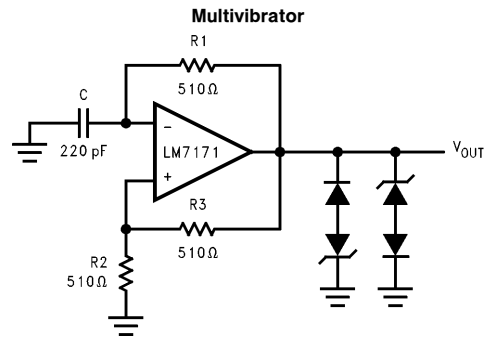


TL/H/12385-15

$$f = \frac{1}{2 \left( R_1 C \ln \left( 1 + 2 \frac{R_2}{R_3} \right) \right)}$$


$$f = 4 \text{ MHz}$$

### Pulse Width Modulator

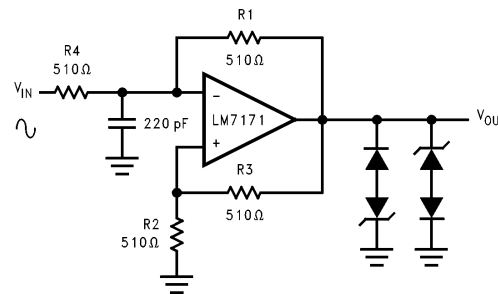

TL/H/12385-16

## Application Circuit (Continued)

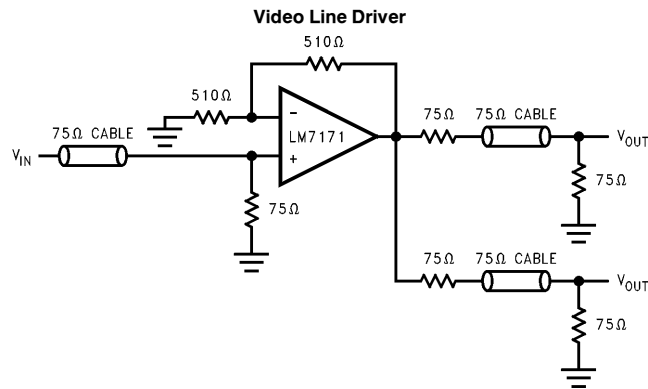

TL/H/12385-21

## Design Kit

A design kit is available for the LM7171. The design kit contains:

- High Speed Evaluation Board
- LM7171 in 8-pin DIP Package
- LM7171 Datasheet
- Pspice Macromodel Diskette With The LM7171 Macromodel
- Amplifier Selection Guide


## Pitch Pack

A pitch pack is available for the LM7171. The pitch pack contains:

- LM7171 in 8-pin DIP Package
- LM7171 Datasheet
- Pspice Macromodel Diskette With The LM7171 Macromodel
- Amplifier Selection Guide


Contact your local National Semiconductor sales office to obtain a pitch pack and design kit.

## Physical Dimensions inches (millimeters)

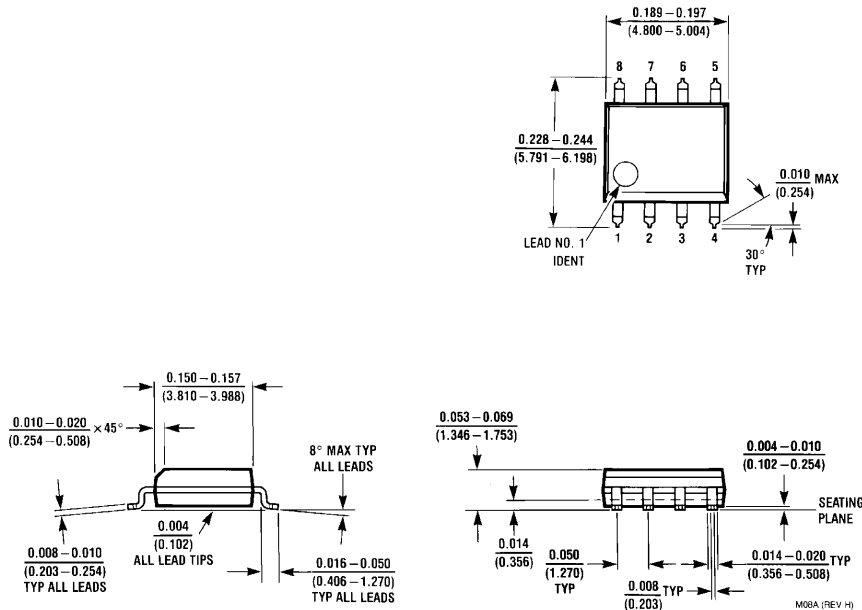


Order Number LM7171AIM, LM7171BIM,  
LM7171AIMX or LM7171BIMX  
8-Lead (0.150" Wide) Molded Small Outline Package, JEDEC  
NS Package Number M08A

**Physical Dimensions** inches (millimeters) (Continued)

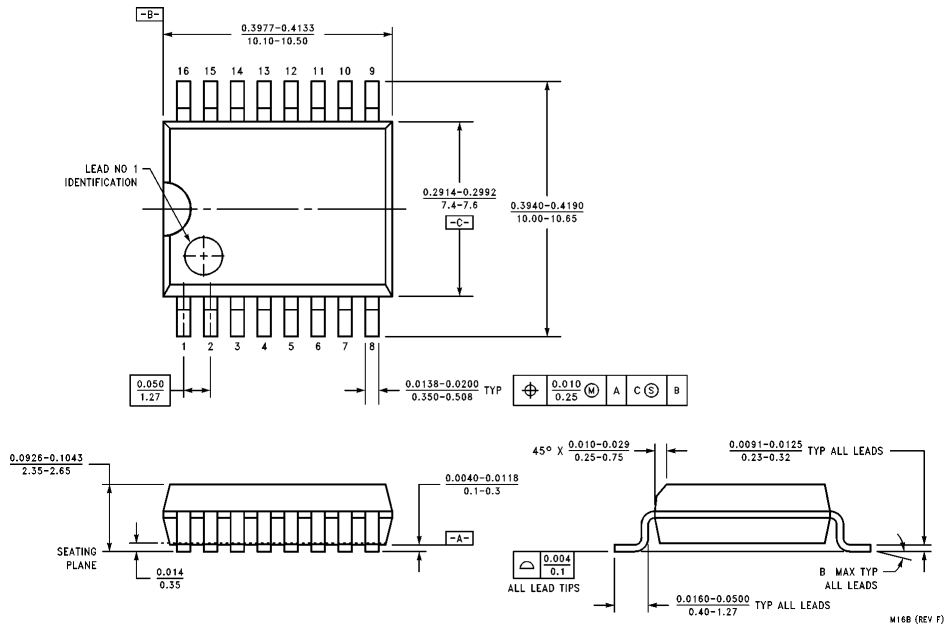


Order Number LM7171AIWM, LM7171BIWM,  
LM7171AIWMX or LM7171BIWMX  
16-Lead (0.300" Wide) Molded Small Outline Package, JEDEC  
NS Package Number M16B

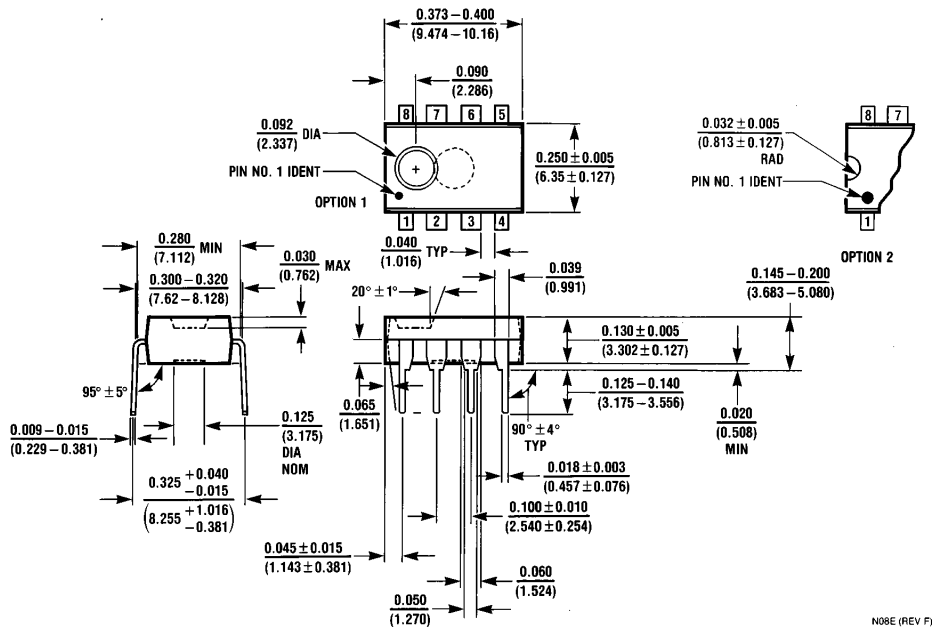

Order Number LM7171AIN or LM7171BIN  
8-Lead (0.300" Wide) Molded Dual-In-Line Package, JEDEC  
NS Package Number N08E

**Physical Dimensions** inches (millimeters) (Continued)

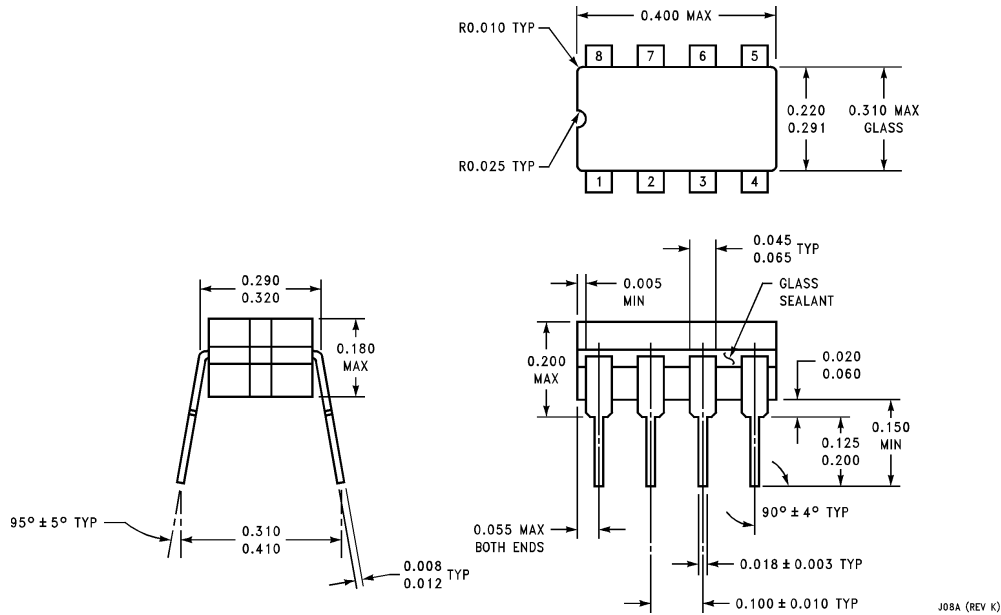

**Order Number 5962-9553601QPA**  
**8-Lead Dual-In-Line Package**  
**NS Package Number J08A**  
**NSID is LM7171AMJ/883**

J08A (REV K)

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: onjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.