


## Metal Film Resistors

# Professional Type

## Miniature Style [ MF0 Series ]

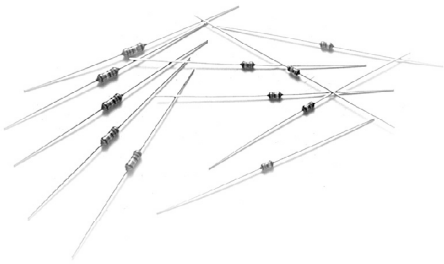

### INTRODUCTION

The MF0 Series Metal Film Professional Resistors are manufactured using a vacuum sputtering system to deposit multiple layers of mixed metal alloys and passivative materials onto a carefully treated high grade ceramic substrate. After a helical groove has been cut in the resistive layer; tinned connecting leads of electrolytic copper are welded to the end-caps. The resistors are coated with layers of blue color lacquer.


### FEATURES

Power Rating	0.4W, 0.6W
Resistance Tolerance	$\pm 0.5\%$ , $\pm 1\%$ , $\pm 5\%$
T.C.R.	$\pm 50\text{ppm}/^{\circ}\text{C}$

### DERATING CURVE

For resistors operated in ambient temperatures above  $70^{\circ}\text{C}$ , power rating must be derated in accordance with the curve below.

Rated Load (%)

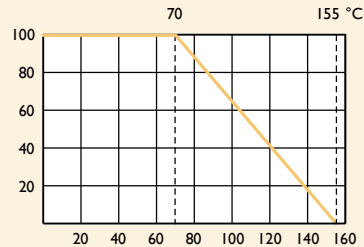

Ambient Temperature ( $^{\circ}\text{C}$ )

### DIMENSIONS

Unit: mm



STYLE	DIMENSION			
Miniature	L	øD	H	ød
MF0204	$3.4 \pm 0.3$	$1.9 \pm 0.2$	$28 \pm 2.0$	$0.45 \pm 0.05$
MF0207	$6.3 \pm 0.5$	$2.4 \pm 0.2$	$28 \pm 2.0$	$0.55 \pm 0.05$

Note:

## ELECTRICAL CHARACTERISTICS

STYLE	MF0204	MF0207
Power Rating at 70°C	0.4W	0.6W
Maximum Working Voltage	250V	350V
Maximum Overload Voltage	500V	700V
Voltage Proof	300V	500V
Resistance Range	1 $\Omega$ - 10M $\Omega$ & 0 $\Omega$ for E24 & E96 series value	
Operating Temp. Range	-55°C to +155°C	
Temperature Coefficient	$\pm 50$ ppm/°C	

Note: Special value is available on request

## ENVIRONMENTAL CHARACTERISTICS

PERFORMANCE TEST	TEST METHOD		APPRAISE
ShortTime Overload	IEC 60115-1 4.13	2.5 times RCWV for 5 Sec.	$\pm 0.25\% + 0.05 \Omega$
Voltage Proof	IEC 60115-1 4.7	in V-block for 60 Sec., test voltage by type	By type
Temperature Coefficient	IEC 60115-1 4.8	-55°C to +155°C	By type
Insulation Resistance	IEC 60115-1 4.6	in V-block for 60 Sec.	$> 10,000M \Omega$
Solderability	IEC 60115-1 4.17	235 $\pm 5$ °C for 3 $\pm 0.5$ Sec.	95% Min. coverage
Solvent Resistance of Marking	IEC 60115-1 4.30	IPA for 5 $\pm 0.5$ Min. with ultrasonic	No deterioration of coatings and markings
Robustness of Terminations	IEC 60115-1 4.16	Direct load for 10 Sec. in the direction of the terminal leads	$\geq 2.5$ kg (24.5N)
Periodic-pulse Overload	IEC 60115-1 4.39	4 times RCWV 10,000 cycles (1 Sec. on, 25 Sec. off)	$\pm 1.0\% + 0.05 \Omega$
Damp Heat Steady State	IEC 60115-1 4.24	40 $\pm 2$ °C, 90-95% RH for 56 days, loaded with 0.1 times RCWV	$\pm 1.5\% + 0.05 \Omega$
Endurance at 70°C	IEC 60115-1 4.25	70 $\pm 2$ °C at RCWV for 1,000 Hr. (1.5 Hr. on, 0.5 Hr. off)	$\pm 1.5\% + 0.05 \Omega$
Temperature Cycling	IEC 60115-1 4.19	-55°C $\Rightarrow$ Room Temp. $\Rightarrow$ +155°C $\Rightarrow$ Room Temp. (5 cycles)	$\pm 0.75\% + 0.05 \Omega$
Resistance to Soldering Heat	IEC 60115-1 4.18	260 $\pm 3$ °C for 10 $\pm 1$ Sec., immersed to a point 3 $\pm 0.5$ mm from the body	$\pm 0.25\% + 0.05 \Omega$

Note: Rated Continuous Working Voltage (RCWV) =  $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$