
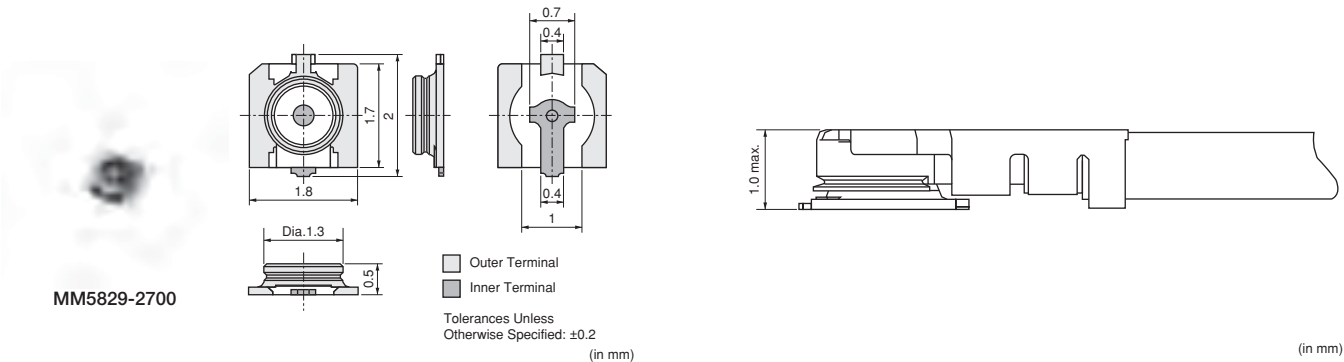


Microwave Coaxial Connectors

Microwave Coaxial Cable Connectors

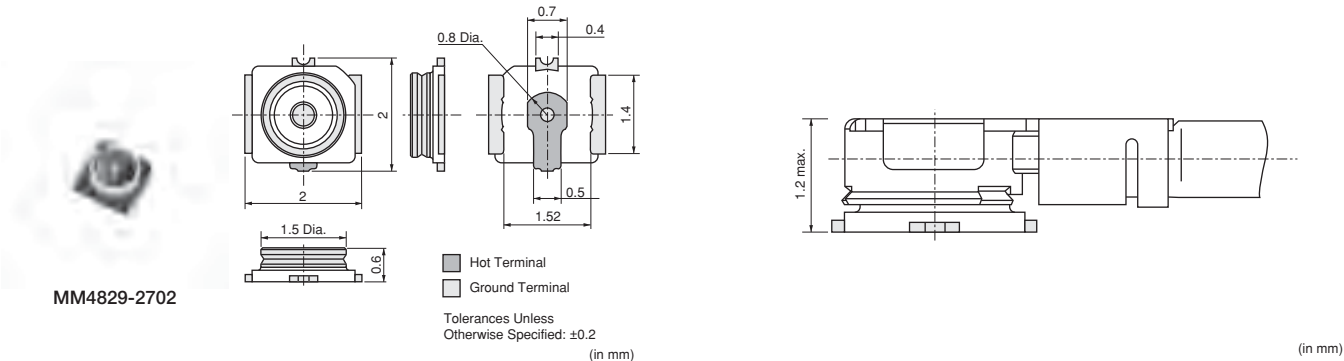


Part Number	Rated Voltage (Vrms)	Frequency Rating (GHz)	Temperature Range	VSWR
MM4829-2702	30	to 6.0	-40 to +85°C	1.3 max. (DC to 3GHz)
MM5829-2700	30	to 12	-40 to +85°C	1.3 max. (DC to 3GHz)
MXHP32_____	30	to 6.0	-40 to +85°C	1.3 max. (DC to 3GHz)
MXJA01_____	30	to 12	-40 to +85°C	1.3 max. (DC to 3GHz)

Impedance: 50ohm


Microwave Coaxial Connectors

Microwave Coaxial Connectors with Switch


MM8030-2610

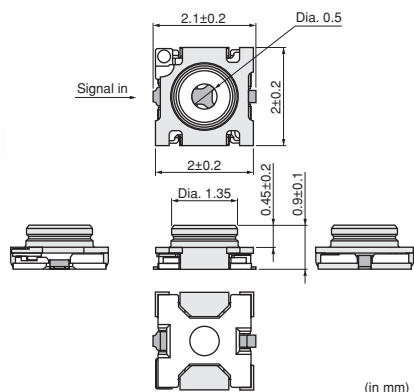


MM8130-2600

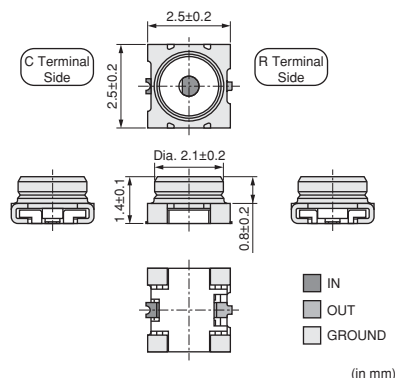


MM8430-2610

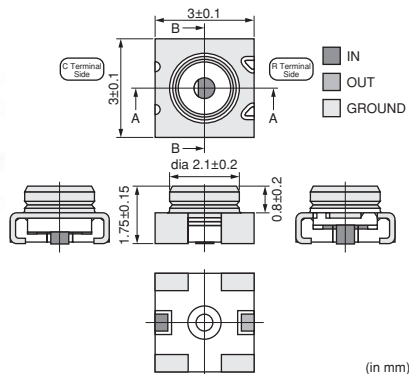


MM8930-2600

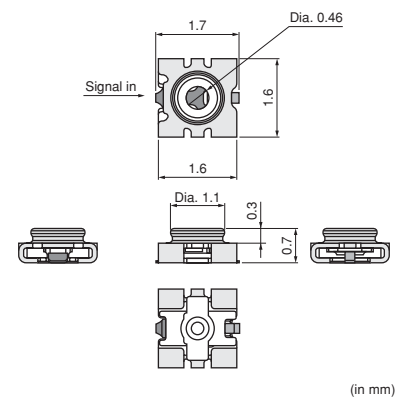


Measurement Probe for MM8030-2610/MM8130-2600/MM8430-2610
(P/N: MM126320)

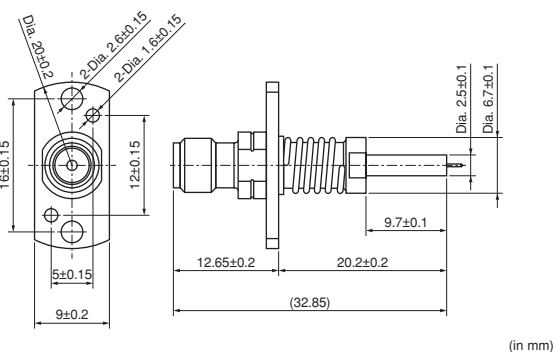


Measurement Probe for MM8030-2610
(P/N: MXHQ87WJ3000)

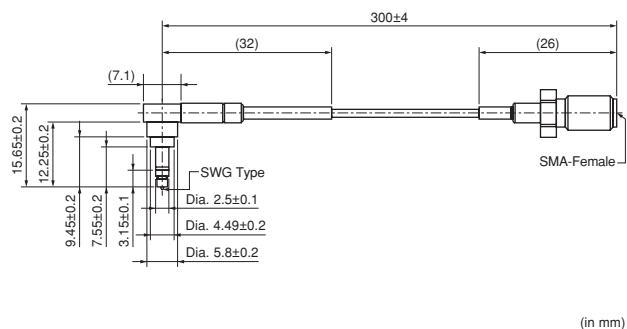

Measurement Probe for MM8130-2600/MM8430-2610
(P/N: MXHS83QE3000)

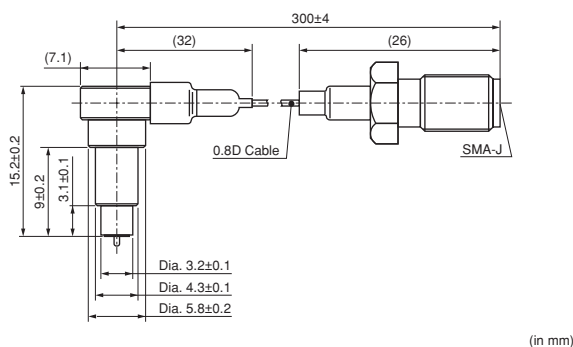


Measurement Probe for MM8930-2600
(P/N: MM126515)

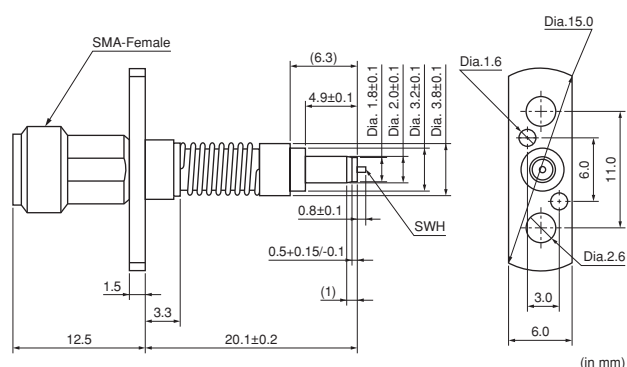

☐ Continued from the preceding page.

**Measurement Probe for MM8930-2600
 (P/N: MXHQ87PA3000)**

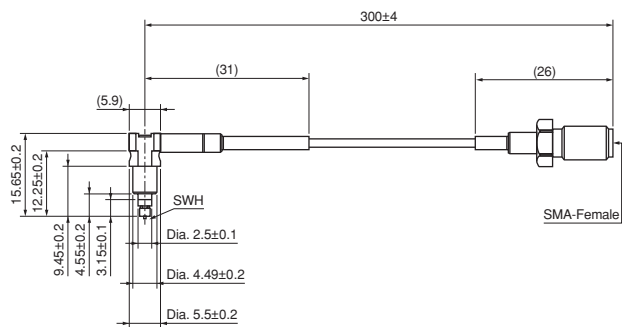

(in mm)

Part Number	Rated Voltage (Vrms)	Frequency Rating (GHz)	Temperature Range	VSWR
MM8030-2610	30	to 11	-40 to +85°C	1.2 max. (DC to 3GHz)
MM8130-2600	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)
MM8430-2610	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)
MM8930-2600	30	to 6	-40 to +85°C	1.2 max. (DC to 3GHz)

Impedance: 50ohm