


Thick film rectangular

MCR18 (3216 size: 1 / 4W)

●Features

- 1) Power rating of 1 / 4W
- 2) Highly reliable chip resistor Ruthenium oxide dielectric offers superior resistance to the elements.
- 3) Electrodes not corroded by soldering
Thick film makes the electrodes very strong.
- 4) Leading the world in development and mass production.
Since start of production in 1976 (first in the world), this component has established a solid reputation as a general-purpose chip resistor.
- 5) ROHM resistors have approved ISO-9001 certification.
Design and specifications are subject to change without notice. Carefully check the specification sheet before using or ordering it.

●Ratings

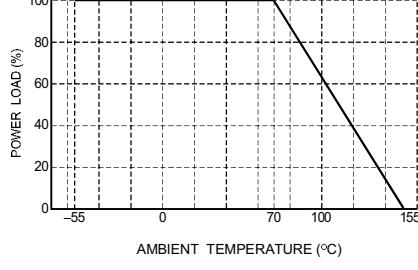Item	Conditions	Specifications	
Rated power	Power must be derated according to the power derating curve in Figure 1 when ambient temperature exceeds 70°C.	0.25W (1 / 4W) at 70°C	
	 <p>Fig.1</p>		
Rated voltage	The voltage rating is calculated by the following equation. If the value obtained exceeds the limiting element voltage, the voltage rating is equal to the maximum operating voltage.	$E = \sqrt{P \times R}$ <p>E: Rated voltage (V) P: Rated power (W) R: Nominal resistance (Ω)</p>	
Nominal resistance	See Table 1.	Limiting element voltage	
Operating temperature	-55°C to +155°C		

Resistors

Jumper type

Table 1

Resistance	Max. 50mΩ	Resistance tolerance	Resistance range (Ω)	Resistance temperature coefficient (ppm / °C)
Rated current	2A	F (±1%)	0.1 ≤ R < 0.15 (E24)	400±200
Operating temperature	-55°C to +155°C		0.15 ≤ R < 10 (E24)	±250
			10 ≤ R ≤ 2.2M (E24,96)	±100
		J (±5%)	0.1 ≤ R < 0.15 (E24)	400±200
			0.15 ≤ R < 1 (E24)	±250
			1.0 ≤ R < 2.2 (E24)	500±350
			2.2 ≤ R < 10 (E24)	±500
			10 ≤ R ≤ 10M (E24)	±200


- Before using components in circuits where they will be exposed to transients such as pulse loads (short-duration, high-level loads), be certain to evaluate the component in the mounted state. In addition, the reliability and performance of this component cannot be guaranteed if it is used with a steady state voltage that is greater than its rated voltage.

● Characteristics

Item	Guaranteed value		Test conditions (JIS C 5201-1)
	Resistor type	Jumper type	
Resistance	J : ±5% F : ±1%	Max. 50mΩ	JIS C 5201-1 4.5
Variation of resistance with temperature	See Table.1		JIS C 5201-1 4.8 Measurement : -55 / +25 / +125°C
Overload	± (2.0%+0.1Ω)	Max. 50mΩ	JIS C 5201-1 4.13 Rated voltage (current) ×2.5, 2s. Limiting Element Voltage×2 : 400V
Solderability	A new uniform coating of minimum of 95% of the surface being immersed and no soldering damage.		JIS C 5201-1 4.17 Rosin-Ethanol (25%WT) Soldering condition : 235±5°C Duration of immersion : 2.0±0.5s.
Resistance to soldering heat	± (1.0%+0.05Ω) No remarkable abnormality on the appearance.	Max. 50mΩ	JIS C 5201-1 4.18 Soldering condition : 260±5°C Duration of immersion : 10±1s.
Rapid change of temperature	± (1.0%+0.05Ω)	Max. 50mΩ	JIS C 5201-1 4.19 Test temp. : -55°C~+125°C 5cyc
Damp heat, steady state	± (3.0%+0.1Ω)	Max. 100mΩ	JIS C 5201-1 4.24 40°C, 93%RH Test time : 1,000h~1,048h
Endurance at 70°C	± (3.0%+0.1Ω)	Max. 100mΩ	JIS C 5201-1 4.25.1 Rated voltage (current), 70°C 1.5h : ON – 0.5h : OFF Test time : 1,000h~1,048h
Endurance	± (3.0%+0.1Ω)	Max. 100mΩ	JIS C 5201-1 4.25.3 155°C Test time : 1,000h~1,048h
Resistance to solvent	± (1.0%+0.05Ω)	Max. 50mΩ	JIS C 5201-1 4.29 23±5°C, Immersion cleaning, 5±0.5min. Solvent : 2-propanol
Bend strength of the end face plating	± (1.0%+0.05Ω) Without mechanical damage such as breaks.	Max. 50mΩ	JIS C 5201-1 4.33

Resistors

● External dimensions (Units : mm)

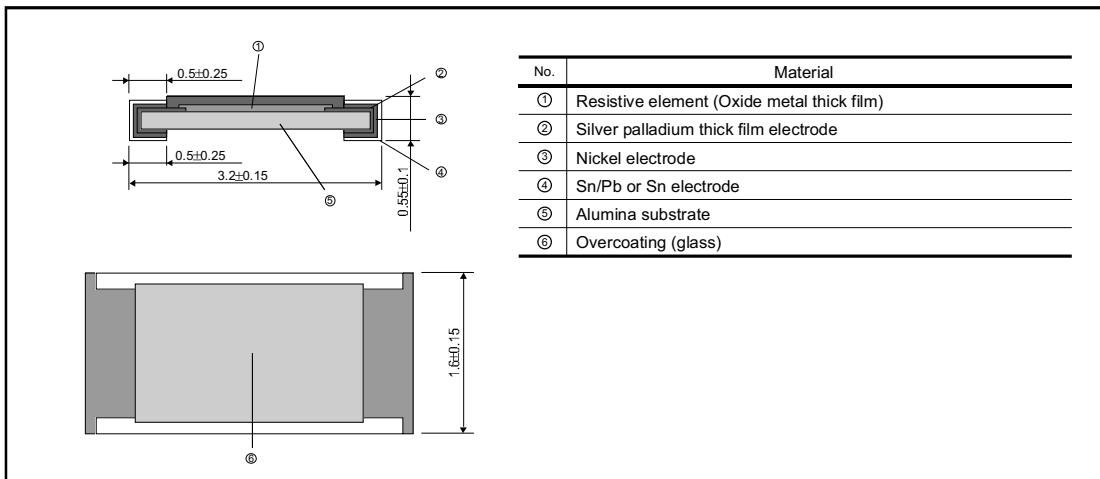


● Packaging




Reel	Taping																												
<p>EIAJ ET-7200A compliant</p> <p>(Units: mm)</p> <table border="1"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> <th>D</th> </tr> </thead> <tbody> <tr> <td>$\phi 180$ -3</td> <td>$\phi 60$ 0</td> <td>9 +1.0 0</td> <td>$\phi 13$ ±0.2</td> </tr> </tbody> </table>	A	B	C	D	$\phi 180$ -3	$\phi 60$ 0	9 +1.0 0	$\phi 13$ ±0.2	<p>Heat crimp cover/Tape</p> <p>Thick paper (Underside paper tape)</p> <p>Chip resistor</p> <p>Square punchout hole</p> <p>Mount</p> <p>(Units: mm)</p> <table border="1"> <thead> <tr> <th>W</th> <th>F</th> <th>E</th> <th>A₂</th> <th>B₂</th> </tr> </thead> <tbody> <tr> <td>8.0 ± 0.3</td> <td>3.5 ± 0.05</td> <td>1.75 ± 0.1</td> <td>1.95 +0.1 -0.05</td> <td>3.5 +0.15 -0.05</td> </tr> <tr> <td>D₂</td> <td>P₂</td> <td>P₂</td> <td>P₂</td> <td>T₂</td> </tr> <tr> <td>$\phi 1.5$ 0</td> <td>4.0 ± 0.1</td> <td>4.0 ± 0.1</td> <td>2.0 ± 0.05</td> <td>Max. 1.1</td> </tr> </tbody> </table>	W	F	E	A ₂	B ₂	8.0 ± 0.3	3.5 ± 0.05	1.75 ± 0.1	1.95 +0.1 -0.05	3.5 +0.15 -0.05	D ₂	P ₂	P ₂	P ₂	T ₂	$\phi 1.5$ 0	4.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	Max. 1.1
A	B	C	D																										
$\phi 180$ -3	$\phi 60$ 0	9 +1.0 0	$\phi 13$ ±0.2																										
W	F	E	A ₂	B ₂																									
8.0 ± 0.3	3.5 ± 0.05	1.75 ± 0.1	1.95 +0.1 -0.05	3.5 +0.15 -0.05																									
D ₂	P ₂	P ₂	P ₂	T ₂																									
$\phi 1.5$ 0	4.0 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	Max. 1.1																									
	<p>EIAJ ET-7201A compliant</p> <p>(Units: mm)</p>																												

Resistors




● Makeup of the part number

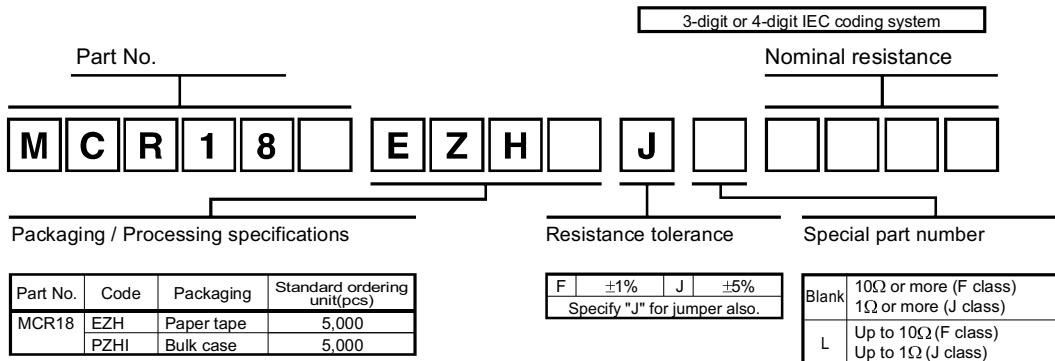

● Dimensions

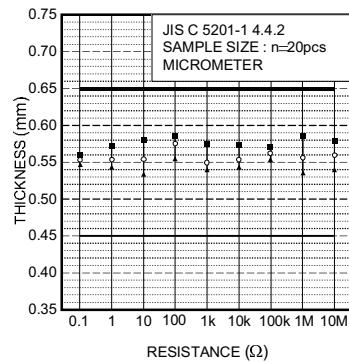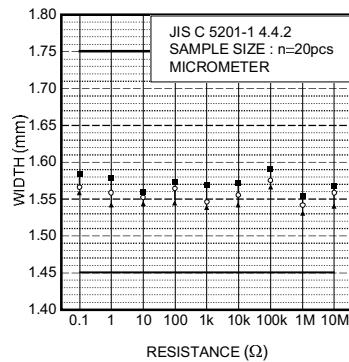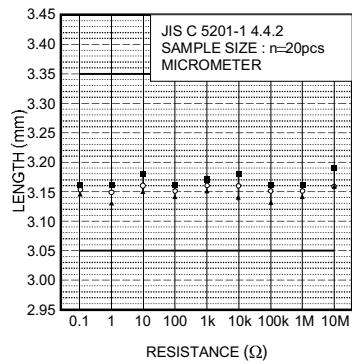

● Electrical characteristics

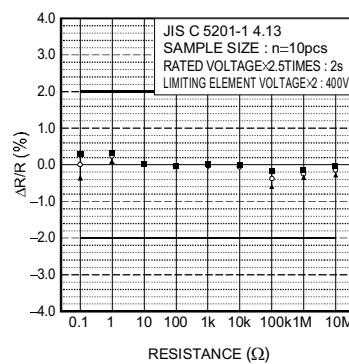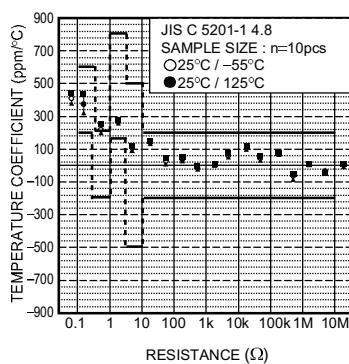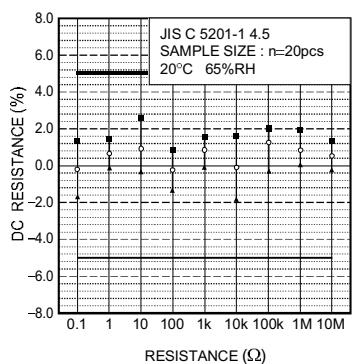

Resistors

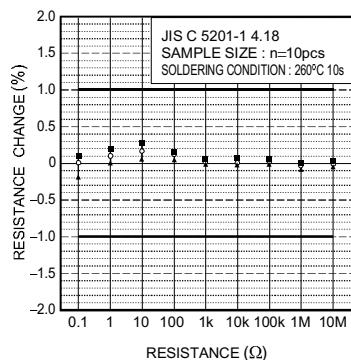


Fig.8 Resistance to soldering heat

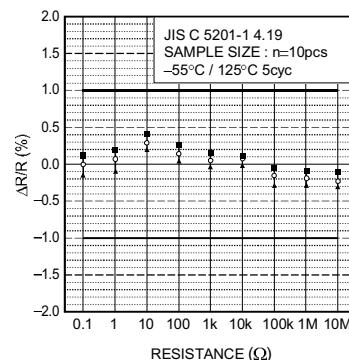


Fig.9 Rapid change of temperature

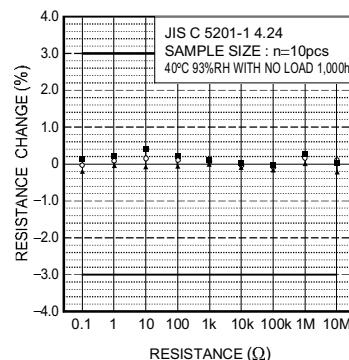


Fig.10 Damp heat, steady state

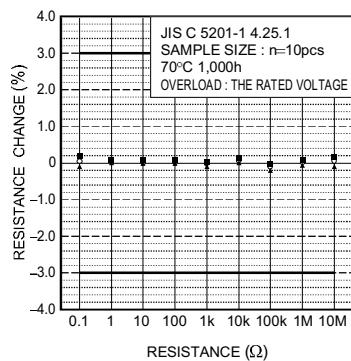


Fig.11 Endurance (at 70°C)

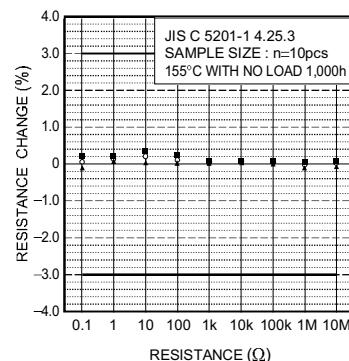


Fig.12 Endurance

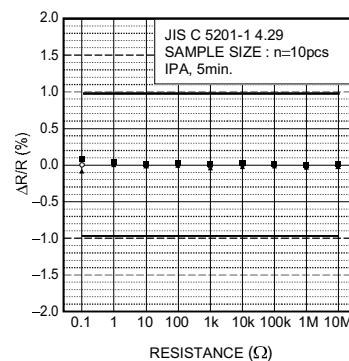


Fig.13 Resistance to solvents

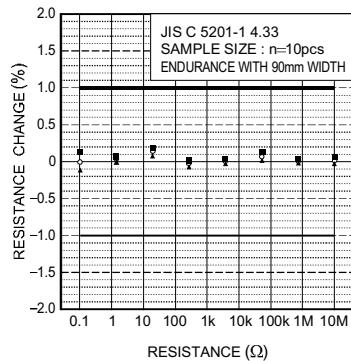


Fig.14 Bend strength of the end face plating