DUAL OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJM4558/4559 integrated circuit are a dual high-gain operational amplifier internally compensated and constructed on a single silicon chip using an advanced epitaxial process.

Combining the features of the NJM741 with the close parameter matching and tracking of a dual device on a monolithic chip results in unique performance characteristics. Excellent channel separation allow the use of the dual device in single NJM741 operational amplifier applications providing density. It is especially well suited for applications in differential-in, differential-out as well as in potentiometric amplifiers and where gain and phase matched channels are mandatory.

■ PACKAGE OUTLINE

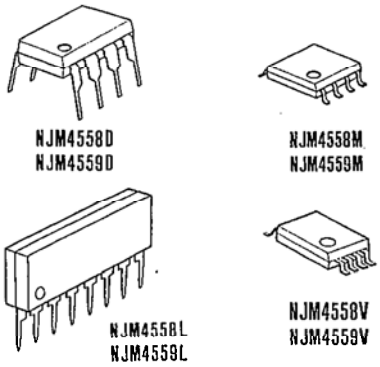

■ FEATURES

- Operating Voltage (±4V～±18V)
- High Voltage Gain (100dB typ.)
- High Input Resistance (5MΩ typ.)
- Package Outline DIP8, DMP8, SIP8, SSOP8
- Bipolar Technology

■ PIN CONFIGURATION



NJM4558D, NJM4558M, NJM4558V
NJM4559D, NJM4559M, NJM4559V



NJM4558L
NJM4559L

PIN FUNCTION
1. A OUTPUT
2. A−INPUT
3. A+INPUT
4. V⁻
5. B+INPUT
6. B−INPUT
7. B OUTPUT
8. V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

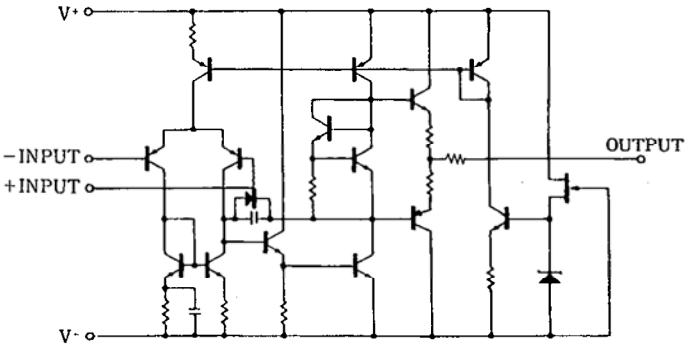

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25℃)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+/V^-	±18	V
Differential Input Voltage	V_{ID}	±30	V
Input Voltage	V_{IC}	±15 (note)	V
Power Dissipation	P_D	(DIP8) 500	mW
		(DMP8) 300	mW
		(SSOP8) 250	mW
		(SIP8) 800	mW
Operating Temperature Range	T_{opr}	−40～+85	℃
Storage Temperature Range	T_{stg}	−40～+125	℃

(note) For supply voltage less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

■ ELECTRICAL CHARACTERISTICS

(V^+/V^-=±15V Ta=25℃)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	R_S ≦10kΩ	—	0.5	6	mV
Input Offset Current	I_{IO}		—	5	200	nA
Input Bias Current	I_B		—	25	500	nA
Input Resistance	R_{IN}		0.3	5	—	MΩ
Large Signal Voltage Gain	A_V	R_L ≧2kΩ, V_O=±10V	86	100	—	dB
Maximum Output Voltage Swing 1	V_{OM1}	R_L ≧10kΩ	±12	±14	—	V
Maximum Output Voltage Swing 2	V_{OM2}	R_L ≧2Ω	±10	±13	—	V
Input Common Mode Voltage Range	V_{ICM}		±12	14	—	V
Common Mode Rejection Ratio	CMR	R_S ≦10kΩ	70	90	—	dB
Supply Voltage Rejection Ratio	SVR	R_S ≦10kΩ	76.5	90	—	dB
Operating Current	I_{CC}		—	3.5	5.7	mA
Slew Rate						
NJM4558	SR		—	1	—	V/μS
NJM4559	SR		—	2	—	V/μS
Equivalent Input Noise Voltage	V_{NI}	RIAA, R_S =1kΩ, 30kHz LPF	—	1.4	—	μVrms
Gain Bandwidth Product	GB					
NJM4558				3		MHz
NJM4559				6		MHz

■ TYPICAL CHARACTERISTICS

Open Loop Voltage Gain vs. Frequency

($V^+/V^-=\pm15V$, $R_L=2k\Omega$, $Ta=25°C$)

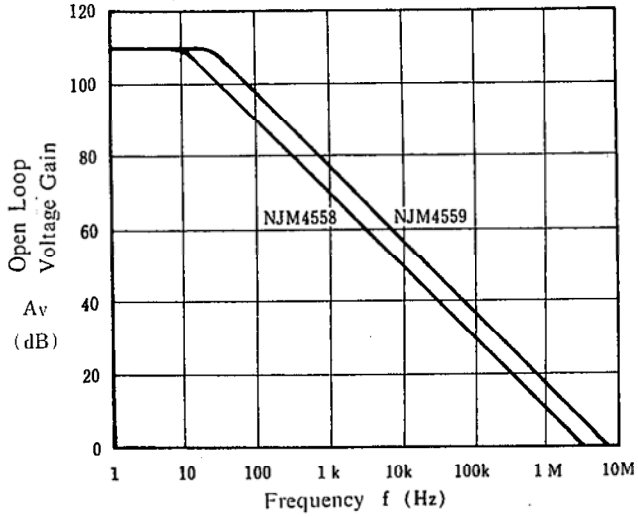

Maximum Output Voltage Swing vs. Frequency

($V^+/V^-=\pm15V$, $R_L=2k\Omega$, $Ta=25°C$)

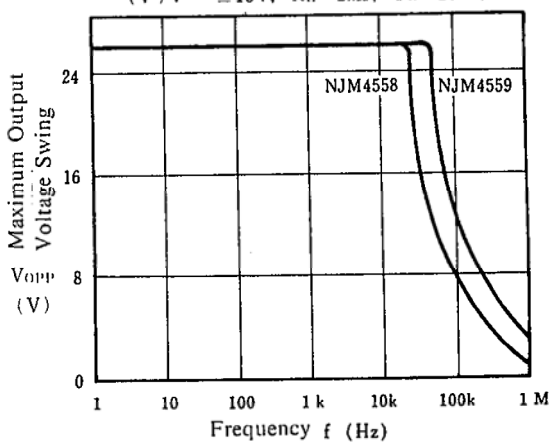

Maximum Output Voltage Swing vs. Load Resistance

($V^+/V^-=\pm15V$, $Ta=25°C$)

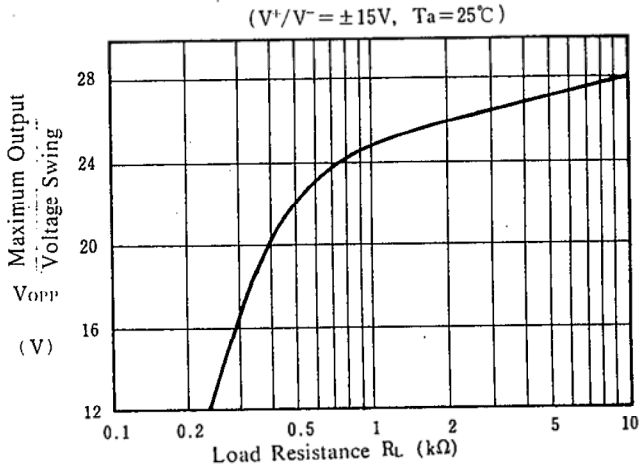

Equivalent Input Noise Voltage vs. Frequency

($V^+/V^-=\pm15V$, $Rs=50\Omega$, $Av=60dB$, $Ta=25°C$)

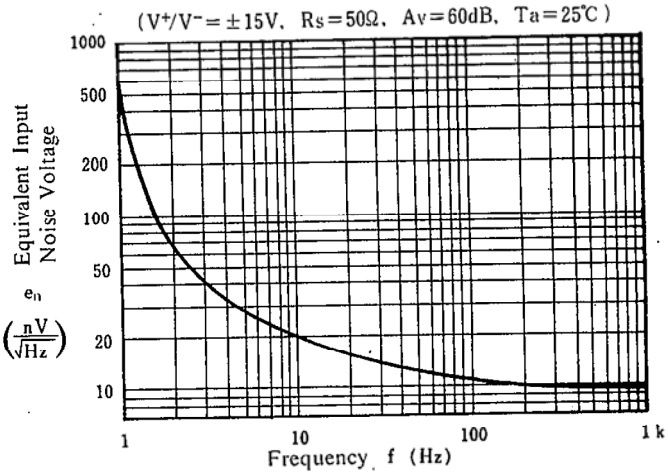

Operating Current vs. Temperature

($V^+/V^-=\pm15V$)

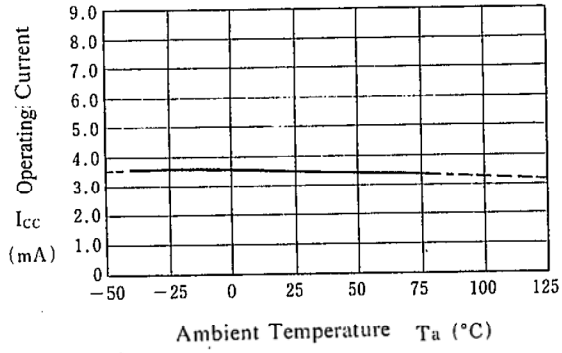

Maximum Output Voltage Swing vs. Temperature

($V^+/V^-=\pm15V$, $R_L=10k\Omega$)

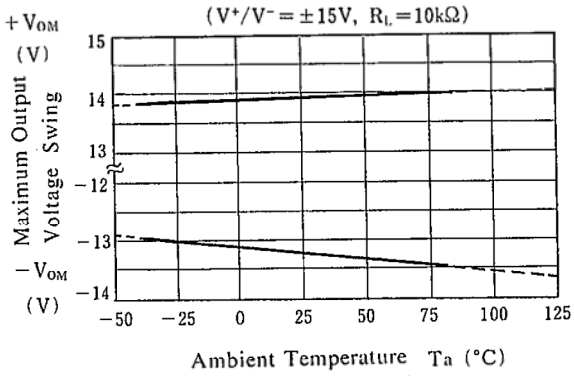

■ TYPICAL CHARACTERISTICS

Input Offset Voltage vs. Temperature

(V+/V− = ±15V)

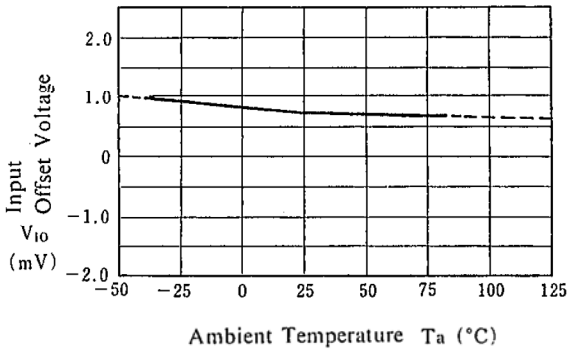

Input Bias Current vs. Temperature

(V+/V− = ±15V)

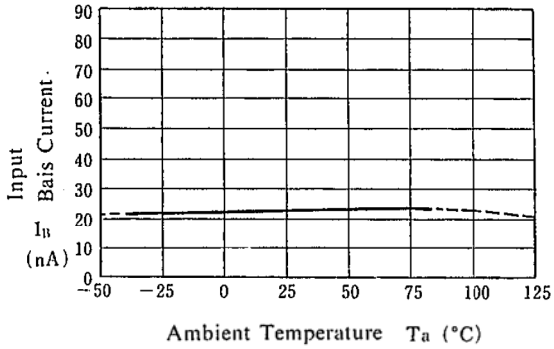

Maximum Output Voltage Swing vs. Operating Voltage

(RL = 2kΩ, Ta = 25°C)

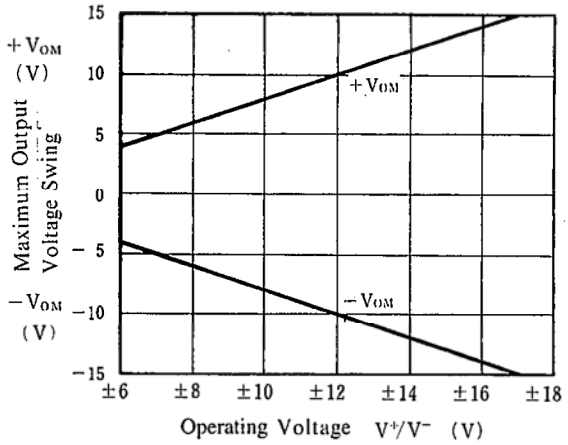

Operating Current vs. Operating Voltage

(Ta = 25°C)

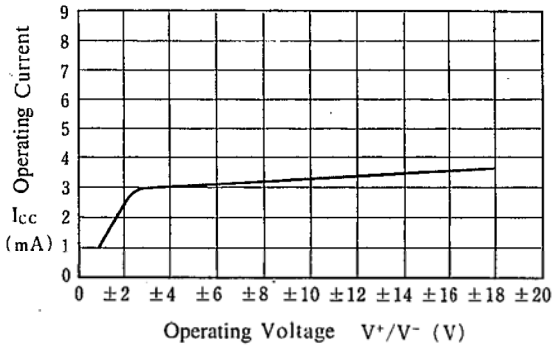

MEMO

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.