


| Pin | Dimensions (mm/inch) | | | | Ordering Code |
|-----|----------------------|---------------|---------------|------------------------|------------------------|
| | "A" | "B" | "C" | | |
| 6 | 7,62/.300 | 7,62 .300 | 10,16 .400 | | PSO-306-H093-95 |
| 8 | 10,16/.400 | | | PSO-308-H093-95 | |
| 10 | 12,70/.500 | | | PSO-310-H093-95 | |
| 14 | 17,78/.700 | | | PSO-314-H093-95 | |
| 16 | 20,32/.800 | | | PSO-316-H093-95 | |
| 18 | 22,86/.900 | | | PSO-318-H093-95 | |
| 20 | 25,40/1.000 | | | PSO-320-H093-95 | |
| 24 | 30,48/1.200 | 15,24 .600 | 17,78 .700 | | PSO-624-H093-95 |
| 28 | 35,56/1.400 | | | PSO-628-H093-95 | |
| 32 | 40,64/1.600 | | | PSO-632-H093-95 | |
| 36 | 45,72/1.800 | | | PSO-636-H093-95 | |
| 40 | 50,80/2.000 | | | PSO-640-H093-95 | |
| 48 | 60,96/2.400 | | | PSO-648-H093-95 | |

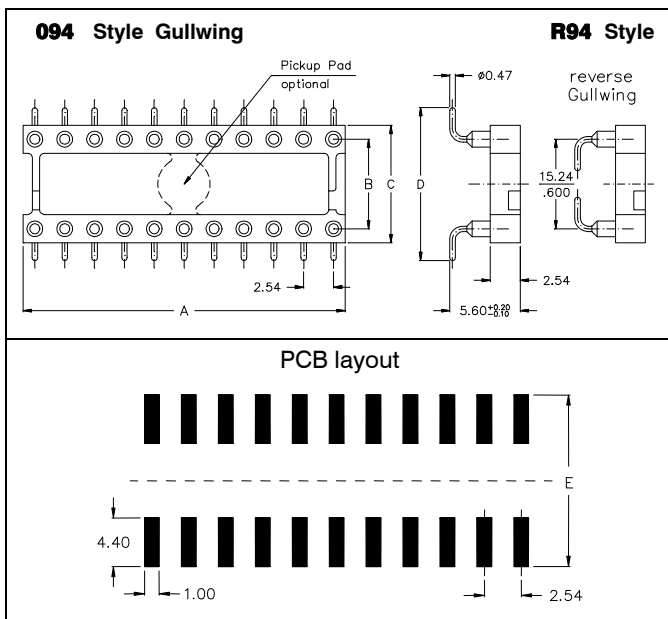

| Pin | Dimensions (mm/inch) | | | | | Ordering Code | |
|-----|----------------------|---------------|---------------|------------------|-------------------|------------------------|------------------------|
| | "A" | "B" | "C" | "D" | "E" 094 Style | | |
| 10 | 12,70/.500 | 5,08 .200 | 7,62 .300 | 10,46 .412 | | PSO-210-H094-95 | |
| 6 | 7,62/.300 | 7,62 .300 | 10,16 .400 | 13,00 .512 | 15,00 .590 | PSO-306-H094-95 | |
| 8 | 10,16/.400 | | | | | PSO-308-H094-95 | |
| 10 | 12,70/.500 | | | | | PSO-310-H094-95 | |
| 14 | 17,78/.700 | | | | | PSO-314-H094-95 | |
| 16 | 20,32/.800 | | | | | PSO-316-H094-95 | |
| 18 | 22,86/.900 | | | | | PSO-318-H094-95 | |
| 20 | 25,40/1.000 | | | | | PSO-320-H094-95 | |
| | | | | "E" 094 Style | "E" R 94 Style | | |
| 24 | 30,48/1.20 | 15,24 .600 | 17,78 .700 | 20,70 .815 | 22,70 .894 | 16,50 .650 | PSO-624-Hxxx-95 |
| 28 | 35,56/1.40 | | | | | | PSO-628-Hxxx-95 |
| 32 | 40,64/1.60 | | | | | | PSO-632-Hxxx-95 |
| 40 | 50,80/2.00 | | | | | | PSO-640-Hxxx-95 |

| | | |
|--|--|--|
| <p>Body types</p> <p>Standard = Open frame (PSO Series)</p> <p>Optional = Closed frame (PSC Series)</p> | <p>Insulator</p> <p>high-temp plastic UL 94 V-0 (RoHS compliant)</p> <p>For further technical data refer to page 49</p> | <p>Temperature</p> <p>Operating temp. -55 °C to +125 °C</p> <p>Processing temp. +250°C +/-5°C for 20~40sec.</p> |
|--|--|--|

How to order

PSO - x x x - H x x x - 95 (/ P)

if with Pickup Pad only 28- & 32-pin -others on request-

