

Switching (30V, 6A)

RK4936


●Features

- 1) Low Qg.
- 2) Low on-resistance.
- 3) Excellent resistance to damage from static electricity.

●Structure


Silicon N-channel
MOS FET

●Equivalent circuit

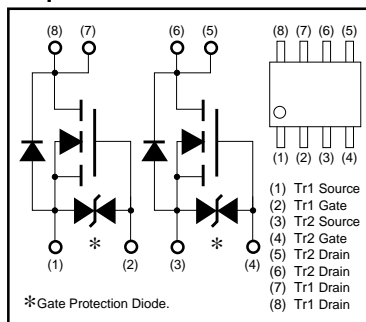

* A protection diode is included between the gate and the source terminals to protect the diode against static electricity when the product is in use. Use a protection circuit when the fixed voltage are exceeded.

●External dimensions (Units : mm)

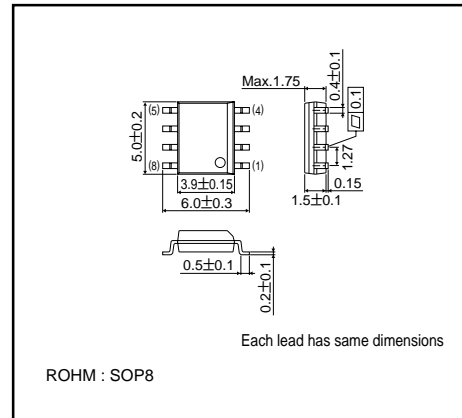

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit	
Drain-Source Voltage	V_{DSS}	30	V	
Gate-Source Voltage	V_{GSS}	±20	V	
Drain Current	Continuous	I_D	6	A
	Pulsed	I_{DP}^*	24	A
Reverse Drain Current	Continuous	I_{DR}	6	A
	Pulsed	I_{DRP}^*	24	A
Source Current (Body Diode)	Continuous	I_S	1.3	A
	Pulsed	I_{SP}^*	5.2	A
Total Power Dissipation(Tc=25°C)	P_D	2	W	
Channel Temperature	T_{ch}	150	°C	
Storage Temperature	T_{stg}	-55~+150	°C	

* $P_w \leq 10\mu s$, Duty cycle $\leq 1\%$

Transistors

● Thermal resistance (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Channel to Ambient	Rth(ch-A)	62.5	°C/W

● Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Gate-Source Leakage	I _{GSS}	–	–	±10	μA	V _{GS} =±20V, V _{DS} =0V
Drain-Source Breakdown Voltage	V _{(BR) DSS}	30	–	–	V	I _D =1mA, V _{GS} =0V
Zero Gate Voltage Drain Current	I _{DSS}	–	–	10	μA	V _{DS} =30V, V _{GS} =0V
Gate Threshold Voltage	V _{GS(th)}	1.0	–	2.5	V	V _{DS} =10V, I _D =1mA
Static Drain-Source On-State Resistance	R _{DS(on)*}	–	22	28	mΩ	I _D =6A, V _{GS} =10V
		–	32	42		I _D =6A, V _{GS} =4.5V
		–	40	52		I _D =6A, V _{GS} =4V
Forward Transfer Admittance	Y _{fs} *	5	–	–	S	I _D =6A, V _{DS} =10V
Input Capacitance	C _{iss}	–	740	–	pF	V _{DS} =10V
Output Capacitance	C _{oss}	–	420	–	pF	V _{GS} =0V
Reverse Transfer Capacitance	C _{rss}	–	180	–	pF	f=1MHz
Turn-On Delay Time	t _{d(on)*}	–	14	–	ns	I _D =3A, V _{DD} =15V
Rise Time	t _r *	–	30	–	ns	V _{GS} =10V
Turn-Off Delay Time	t _{d(off)*}	–	55	–	ns	R _L =5Ω
Fall Time	t _f *	–	25	–	ns	R _{GS} =10Ω
Total Gate Charge	Q _g *	–	21	42	nC	V _{DD} =15V
Gate-Source Charge	Q _{gs} *	–	2.7	–	nC	V _{GS} =10V
Gate-Drain Charge	Q _{gd} *	–	5.6	–	nC	I _D =6A

* Pulsed

● Body diode characteristics (Source-Drain characteristics) (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Forward Voltage	V _{SD} *	–	–	1.5	V	I _S =5.2A, V _{GS} =0V
Reverse Recovery Time	t _{rr} *	–	140	–	ns	I _{DR} =5.2A, V _{GS} =0V
Reverse Recovery Charge	Q _{rr} *	–	140	–	nC	di/dt=100A/μs

* Pulsed

Transistors

● Electrical characteristic curves

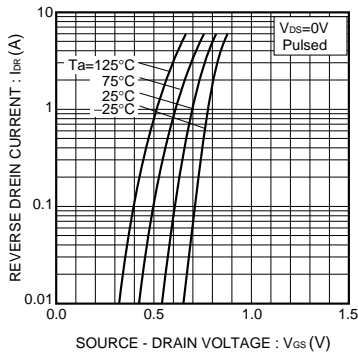


Fig.1 Reverse Drain Current vs. Source-Drain Voltage

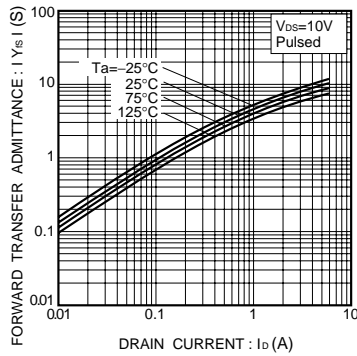


Fig.2 Forward Transfer Admittance vs. Drain Current

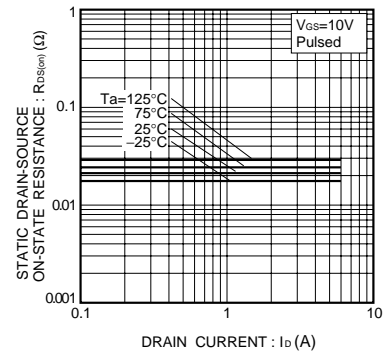


Fig.3 Static Drain-Source On-State Resistance vs. Drain Current (I)

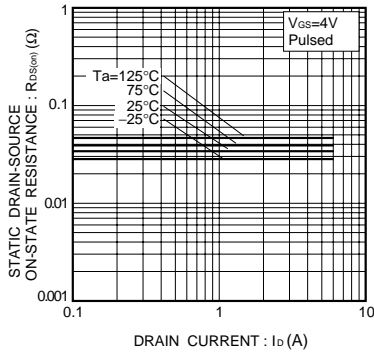


Fig.4 Static Drain-Source On-State Resistance vs. Drain Current (II)

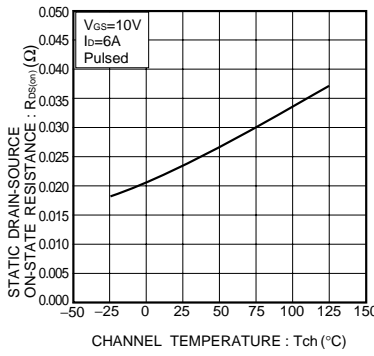


Fig.5 Static Drain-Source On-State Resistance vs. Channel Temperature

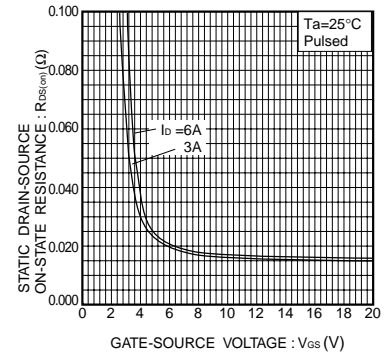


Fig.6 Static Drain-Source On-State Resistance vs. Gate-Source Voltage

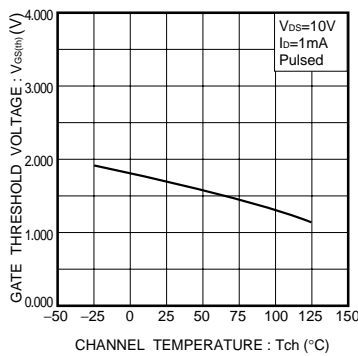


Fig.7 Gate Threshold Voltage vs. Channel Temperature

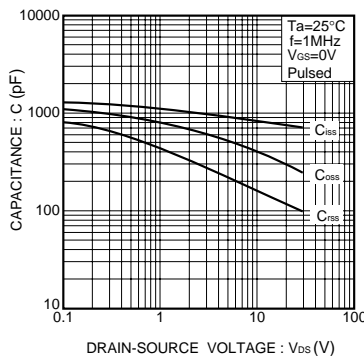


Fig.8 Typical Capacitance vs. Drain-Source Voltage

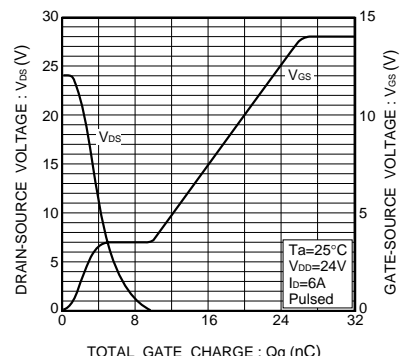


Fig.9 Dynamic Input Characteristics

Transistors

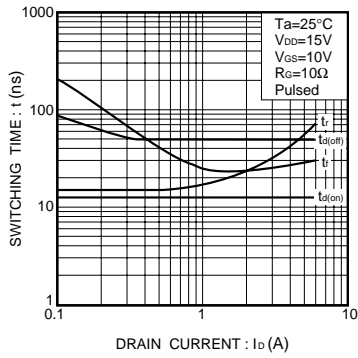


Fig.10 Switching Characteristics

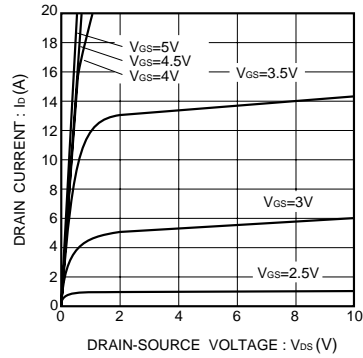


Fig.11 Typical Output Characteristics

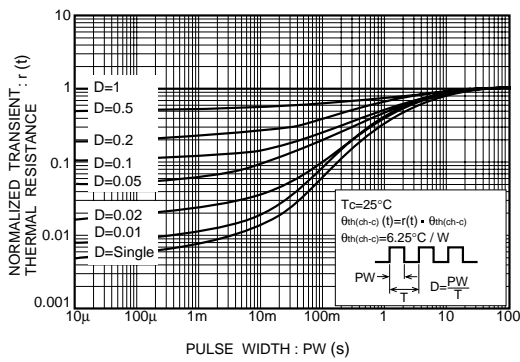


Fig.12 Normalized Transient Thermal Resistance vs. Pulse Width