

SEV SERIES
85°C, Lead Free Reflow Soldering.
◆FEATURES

- Case Dia $\phi 3 \sim \phi 18$ mm
- Lead free reflow soldering is available.
- Available for high density mounting.
- RoHS compliance.


◆SPECIFICATIONS

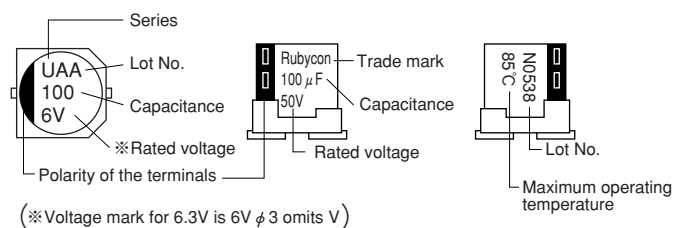
Items	Characteristics																																								
Category Temperature Range	-40~+85°C																																								
Rated Voltage Range	4~100V.DC																																								
Capacitance Tolerance	±20% (20°C, 120Hz)																																								
Leakage Current(MAX)	I=0.01CV or 3 μ A whichever is greater. (After 2 minutes application of rated voltage) I=Leakage Current(μ A) C=Rated Capacitance(μ F) V=Rated Voltage(V)																																								
Dissipation Factor(MAX) (tan δ)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>$\phi 3$</td> <td>0.40</td> <td>0.30</td> <td>—</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.14</td> <td>—</td> <td>—</td> </tr> <tr> <td>$\phi 4, \phi 5, \phi 6.3 \times 5.5$</td> <td>0.40</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.16</td> <td>0.13</td> <td>0.12</td> <td>—</td> <td>—</td> </tr> <tr> <td>$\phi 6.3 \times 8, \phi 8 \sim \phi 18$</td> <td>0.50</td> <td>0.35</td> <td>0.26</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> <td>0.10</td> </tr> </tbody> </table> <p>(20°C, 120Hz)</p> <p>When rated capacitance is over 1000 μF, tan δ shall be added 0.02 to the listed value with increase of every 1000 μF.</p>	Rated Voltage (V)	4	6.3	10	16	25	35	50	63	100	$\phi 3$	0.40	0.30	—	0.20	0.16	0.14	0.14	—	—	$\phi 4, \phi 5, \phi 6.3 \times 5.5$	0.40	0.26	0.22	0.18	0.16	0.13	0.12	—	—	$\phi 6.3 \times 8, \phi 8 \sim \phi 18$	0.50	0.35	0.26	0.20	0.16	0.14	0.12	0.12	0.10
Rated Voltage (V)	4	6.3	10	16	25	35	50	63	100																																
$\phi 3$	0.40	0.30	—	0.20	0.16	0.14	0.14	—	—																																
$\phi 4, \phi 5, \phi 6.3 \times 5.5$	0.40	0.26	0.22	0.18	0.16	0.13	0.12	—	—																																
$\phi 6.3 \times 8, \phi 8 \sim \phi 18$	0.50	0.35	0.26	0.20	0.16	0.14	0.12	0.12	0.10																																
Endurance	<p>After applying rated voltage with rated ripple current for 2000 hrs at 85°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±25% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </tbody> </table>	Capacitance Change	Within ±25% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.																																		
Capacitance Change	Within ±25% of the initial value.																																								
Dissipation Factor	Not more than 200% of the specified value.																																								
Leakage Current	Not more than the specified value.																																								
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>15</td> <td>8</td> <td>8</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>5</td> <td>5</td> </tr> </tbody> </table> <p>(120Hz)</p>	Rated Voltage (V)	4	6.3	10	16	25	35	50	63	100	Z(-25°C)/Z(20°C)	7	4	3	2	2	2	2	2	2	Z(-40°C)/Z(20°C)	15	8	8	4	4	3	3	5	5										
Rated Voltage (V)	4	6.3	10	16	25	35	50	63	100																																
Z(-25°C)/Z(20°C)	7	4	3	2	2	2	2	2	2																																
Z(-40°C)/Z(20°C)	15	8	8	4	4	3	3	5	5																																

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency (Hz)	60 (50)	120	500	1k	10k \leq
0.1~1 μ F	0.50	1.00	1.20	1.30	1.50
2.2~4.7 μ F	0.65	1.00	1.20	1.30	1.50
10~47 μ F	0.80	1.00	1.20	1.30	1.50
100~1000 μ F	0.80	1.00	1.10	1.15	1.20
2200~10000 μ F	0.80	1.00	1.05	1.10	1.15

◆MARKING

 〈 $\phi 3 \sim \phi 6.3, \phi 8 \times 6.5$ 〉 〈 $\phi 8 \times 10.5, \phi 10 \sim \phi 18$ 〉

◆PART NUMBER

□□□	SEV	□□□□□	□	□□□	DXL
Rated Voltage	Series	Rated Capacitance	Capacitance Tolerance	Option	Case Size

