



Metallized Polyester (PET) SMD Film Capacitors with Box Encapsulation

Special Features

- Size codes 1812, 2220, 2824, 4030, 5040 and 6054 with PET and encapsulated
- Operating temperature up to 100° C
- Self-healing
- According to RoHS 2002/95/EC

Typical Applications

- For general DC-applications e.g.
- By-pass
 - Blocking
 - Coupling and decoupling
 - Timing

Construction


Dielectric:

Polyethylene-terephthalate (PET) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

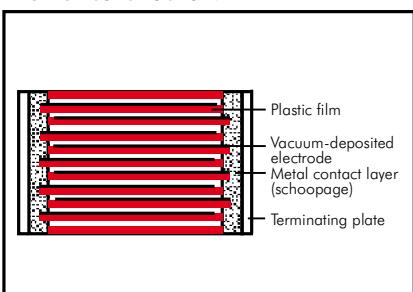

Encapsulation:

Solvent-resistant, flame-retardant plastic case, UL 94 V-0

Terminations:

Tinned plates.

Marking:

Box colour: Black.

Electrical Data

Capacitance range:

0.01 µF to 6.8 µF

Rated voltages:

63 VDC, 100 VDC, 250 VDC, 400 VDC, 630 VDC, 1000 VDC

Capacitance tolerances:

±20%, ±10% (±5% available subject to special enquiry)

Operating temperature range:

-55° C to +100° C (+125° C available subject to special enquiry)

Climatic test category:

55/100/21 according to IEC

for size codes 1812 to 2824

55/100/56 according to IEC

for size codes 4030 to 6054

Insulation resistance at +20° C:

U_r	U_{test}	$C \leq 0.33 \mu F$	$0.33 \mu F < C \leq 6.8 \mu F$
63 VDC	50 V	$\geq 3.75 \times 10^3 M\Omega$ (mean value: $1 \times 10^4 M\Omega$)	$\geq 1250 \text{ sec } (M\Omega \times \mu F)$ (mean value: 3000 sec)
100 VDC	100 V		
$\geq 250 \text{ VDC}$	100 V	$\geq 1 \times 10^4 M\Omega$ (mean value: $5 \times 10^4 M\Omega$)	$\geq 3000 \text{ sec } (M\Omega \times \mu F)$ (mean value: 10000 sec)

Measuring time: 1 min.

Dissipation factors at +20° C: $\tan \delta$

at f	$C \leq 0.1 \mu F$	$0.1 \mu F < C \leq 1.0 \mu F$	$C > 1.0 \mu F$
1 kHz	$\leq 8 \times 10^{-3}$	$\leq 8 \times 10^{-3}$	$\leq 10 \times 10^{-3}$
10 kHz	$\leq 15 \times 10^{-3}$	$\leq 15 \times 10^{-3}$	-
100 kHz	$\leq 30 \times 10^{-3}$	-	-

Maximum pulse rise time:

for pulses equal to the rated voltage

Capacitance μF	Pulse rise time V/µsec max. operation/test					
	63 VDC	100 VDC	250 VDC	400 VDC	630 VDC	1000 VDC
0.01 ... 0.022	30/300	35/350	40/400	35/350	40/400	50/500
0.033 ... 0.068	20/200	20/200	40/400	21/210	25/250	32/320
0.1 ... 0.22	10/100	10/100	12/120	14/140	17/170	-
0.33 ... 0.68	8/80	6/60	9/90	10/100	-	-
1.0 ... 2.2	3.5/35	4/40	7/70	-	-	-
3.3 ... 6.8	3/30	3/30	-	-	-	-

Dip Solder Test/Processing

Resistance to soldering heat:

Test Tb in accordance with DIN IEC 60068-2-58/DIN EN 60384-19.

Soldering bath temperature max. 260° C.

Soldering duration max. 5 sec.

Change in capacitance $\Delta C/C < 5\%$.

Soldering process:

Wave soldering and re-flow soldering (see temperature/time graphs page 12).

Packing

Available taped and reeled in 12 mm blister pack.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data

Capacitance	63 VDC/40 VAC*			100 VDC/63 VAC*			250 VDC/160 VAC*		
	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number
0.01 μF	1812	3.0	SMDTC02100KA00_____	1812	3.0	SMDTD02100KA00_____	1812	4.0	SMDTF02100KB00_____
	2220	3.5	SMDTC02100QA00_____	2220	3.5	SMDTD02100QA00_____	2220	3.5	SMDTF02100QA00_____
	2824	3.0	SMDTC02100TA00_____	2824	3.0	SMDTD02100TA00_____	2824	3.0	SMDTF02100TA00_____
0.015 "	1812	3.0	SMDTC02150KA00_____	1812	3.0	SMDTD02150KA00_____	1812	4.0	SMDTF02150KB00_____
	2220	3.5	SMDTC02150QA00_____	2220	3.5	SMDTD02150QA00_____	2220	3.5	SMDTF02150QA00_____
	2824	3.0	SMDTC02150TA00_____	2824	3.0	SMDTD02150TA00_____	2824	3.0	SMDTF02150TA00_____
0.022 "	1812	3.0	SMDTC02220KA00_____	1812	3.0	SMDTD02220KA00_____	1812	4.0	SMDTF02220KB00_____
	2220	3.5	SMDTC02220QA00_____	2220	3.5	SMDTD02220QA00_____	2220	3.5	SMDTF02220QA00_____
	2824	3.0	SMDTC02220TA00_____	2824	3.0	SMDTD02220TA00_____	2824	3.0	SMDTF02220TA00_____
0.033 "	1812	3.0	SMDTC02330KA00_____	1812	3.0	SMDTD02330KA00_____	2220	3.5	SMDTF02330QA00_____
	2220	3.5	SMDTC02330QA00_____	2220	3.5	SMDTD02330QA00_____	2824	3.0	SMDTF02330TA00_____
	2824	3.0	SMDTC02330TA00_____	2824	3.0	SMDTD02330TA00_____	4030	5.0	SMDTF02330VA00_____
0.047 "	1812	3.0	SMDTC02470KA00_____	1812	3.0	SMDTD02470KA00_____	2220	3.5	SMDTF02470QA00_____
	2220	3.5	SMDTC02470QA00_____	2220	3.5	SMDTD02470QA00_____	2824	3.0	SMDTF02470TA00_____
	2824	3.0	SMDTC02470TA00_____	2824	3.0	SMDTD02470TA00_____	4030	5.0	SMDTF02470VA00_____
0.068 "	1812	3.0	SMDTC02680KA00_____	1812	3.0	SMDTD02680KA00_____	2220	3.5	SMDTF02680QA00_____
	2220	3.5	SMDTC02680QA00_____	2220	3.5	SMDTD02680QA00_____	2824	3.0	SMDTF02680TA00_____
	2824	3.0	SMDTC02680TA00_____	2824	3.0	SMDTD02680TA00_____	4030	5.0	SMDTF02680VA00_____
0.1 μF	1812	3.0	SMDTC03100KA00_____	1812	3.0	SMDTD03100KA00_____	2220	3.5	SMDTF03100QA00_____
	2220	3.5	SMDTC03100QA00_____	2220	3.5	SMDTD03100QA00_____	2824	5.0	SMDTF03100TB00_____
	2824	3.0	SMDTC03100TA00_____	2824	3.0	SMDTD03100TA00_____	4030	5.0	SMDTF03100VA00_____
0.15 "	1812	3.0	SMDTC03150KA00_____	1812	4.0	SMDTD03150KB00_____	2220	4.5	SMDTF03150QB00_____
	2220	3.5	SMDTC03150QA00_____	2220	3.5	SMDTD03150QA00_____	2824	5.0	SMDTF03150TB00_____
	2824	3.0	SMDTC03150TA00_____	2824	3.0	SMDTD03150TA00_____	4030	5.0	SMDTF03150VA00_____
0.22 "	1812	3.0	SMDTC03220KA00_____	1812	4.0	SMDTD03220KB00_____	2220	4.5	SMDTF03220QB00_____
	2220	3.5	SMDTC03220QA00_____	2220	3.5	SMDTD03220QA00_____	2824	5.0	SMDTF03220TB00_____
	2824	3.0	SMDTC03220TA00_____	2824	3.0	SMDTD03220TA00_____	4030	5.0	SMDTF03220VA00_____
0.33 "	1812	4.0	SMDTC03330KB00_____	2220	4.5	SMDTD03330QB00_____	2824	5.0	SMDTF03330TB00_____
	2220	3.5	SMDTC03330QA00_____	2824	5.0	SMDTD03330TB00_____	4030	5.0	SMDTF03330VA00_____
	2824	3.0	SMDTC03330TA00_____	4030	5.0	SMDTD03330VA00_____	5040	6.0	SMDTF03330XA00_____
0.47 "	1812	4.0	SMDTC03470KB00_____	2220	4.5	SMDTD03470QB00_____	4030	5.0	SMDTF03470VA00_____
	2220	3.5	SMDTC03470QA00_____	2824	5.0	SMDTD03470TB00_____	5040	6.0	SMDTF03470XA00_____
	2824	3.0	SMDTC03470TA00_____	4030	5.0	SMDTD03470VA00_____			
0.68 "	2220	4.5	SMDTC03680QB00_____	2824	5.0	SMDTD03680TB00_____	5040	6.0	SMDTF03680XA00_____
	2824	3.0	SMDTC03680TA00_____	4030	5.0	SMDTD03680VA00_____			
	4030	5.0	SMDTC03680VA00_____	5040	6.0	SMDTD03680XA00_____			
1.0 μF	2220	4.5	SMDTC04100QB00_____	2824	5.0	SMDTD04100TB00_____	6054	7.0	SMDTF04100YA00_____
	2824	3.0	SMDTC04100TA00_____	4030	5.0	SMDTD04100VA00_____			
	4030	5.0	SMDTC04100VA00_____	5040	6.0	SMDTD04100XA00_____			
1.5 "	2824	5.0	SMDTC04150TB00_____	4030	5.0	SMDTD04150VA00_____			
	4030	5.0	SMDTC04150VA00_____	5040	6.0	SMDTD04150XA00_____			
2.2 "	2824	5.0	SMDTC04220TB00_____	5040	6.0	SMDTD04220XA00_____			
	4030	5.0	SMDTC04220VA00_____						
3.3 "	4030	5.0	SMDTC04330VA00_____	5040	6.0	SMDTD04330XA00_____			
4.7 "	5040	6.0	SMDTC04470XA00_____	6054	7.0	SMDTD04470YA00_____			
6.8 "	6054	7.0	SMDTC04680YA00_____						

Part number completion:
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: none = 00
Taped version see page 126.

* AC voltage: f = 50 Hz; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

Dims. in mm.

Rights reserved to amend design data without prior notification.

Continuation


General Data

Capacitance	400 VDC/200 VAC*			630 VDC/300 VAC*			1000 VDC/400 VAC*		
	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number	Size code	H ± 0.3	Part number
0.01 μF	2824 4030	3.0 5.0	SMDTG02100TA00 SMDTG02100VA00	4030	5.0	SMDTJ02100VA00			
0.015 "	2824 4030	3.0 5.0	SMDTG02150TA00 SMDTG02150VA00	4030	5.0	SMDTJ02150VA00	5040	6.0	SMDTO12150XA00
0.022 "	2824 4030	3.0 5.0	SMDTG02220TA00 SMDTG02220VA00	5040	6.0	SMDTJ02220XA00	5040	6.0	SMDTO12220XA00
0.033 "	2824 4030	5.0 5.0	SMDTG02330TB00 SMDTG02330VA00	5040	6.0	SMDTJ02330XA00	5040	6.0	SMDTO12330XA00
0.047 "	2824 4030	5.0 5.0	SMDTG02470TB00 SMDTG02470VA00	5040	6.0	SMDTJ02470XA00	6054	7.0	SMDTO12470YA00
0.068 "	4030 5040	5.0 6.0	SMDTG02680VA00 SMDTG02680XA00	5040	6.0	SMDTJ02680XA00			
0.1 μF	4030 5040	5.0 6.0	SMDTG03100VA00 SMDTG03100XA00	6054	7.0	SMDTJ03100YA00			
0.15 "	4030 5040	5.0 6.0	SMDTG03150VA00 SMDTG03150XA00	6054	7.0	SMDTJ03150YA00			
0.22 "	5040	6.0	SMDTG03220XA00	6054	7.0	SMDTJ03220YA00			
0.33 "	5040	6.0	SMDTG03330XA00						
0.47 "	6054	7.0	SMDTG03470YA00						

* AC voltage: f = 50 Hz; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

Dims. in mm.

Solder pad recommendation



Part number completion:						
Tolerance: 20 % = M						
10 % = K						
5 % = J						
Packing: bulk = S						
Pin length: none = 00						
Taped version see page 126.						

The values of the WIMA SMD-PEN range according to the main catalogue 2009 are still available on request.


Size code	L ± 0.3	W ± 0.3	d	a min.	b min.	c max.
1812	4.8	3.3	0.5	1.2	3.5	3.5
2220	5.7	5.1	0.5	1.2	4	4.5
2824	7.2	6.1	0.5	1.2	4	6.5
4030	10.2	7.6	0.5	2.5	6	9
5040	12.7	10.2	0.7	2.5	6	11.5
6054	15.3	13.7	0.7	2.5	6	14

Recommendation for Processing and Application of SMD Capacitors

Layout Form

The components can generally be positioned on the carrier material as desired. In order to prevent soldering shadows or ensure regular temperature distribution, extreme concentration of the components should be avoided. In practice, it has proven best to keep a minimum distance of the soldering surfaces between two WIMA SMDs of twice the height of the components.

Solder Pad Recommendation



Size code	L ± 0.3	W ± 0.3	d	a min.	b min.	c max.
1812	4.8	3.3	0.5	1.2	3.5	3.5
2220	5.7	5.1	0.5	1.2	4	4.5
2824	7.2	6.1	0.5	1.2	4	6.5
4030	10.2	7.6	0.5	2.5	6	9
5040	12.7	10.2	0.7	2.5	6	11.5
6054	15.3	13.7	0.7	2.5	6	14

The solder pad size recommendations given for each individual series are to be understood as minimum dimensions which can at any time be adjusted to the layout form.

Processing



The processing of SMD components

- assembling
- soldering
- electrical final inspection/ calibrating

must be regarded as a complete process. The soldering of the printed circuit board, for example, can constitute considerable stress on all the electronic components. The manufacturer's instructions on the processing of the components are mandatory.

Soldering Process

Re-flow soldering

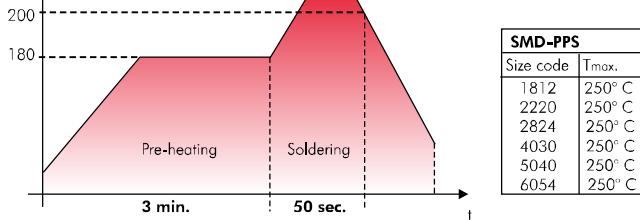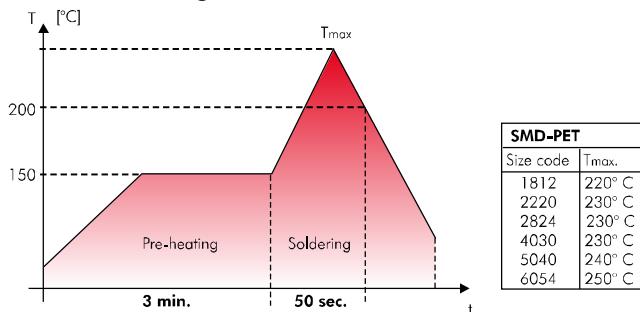

Temperature/time graph for the permissible processing temperature of the WIMA SMD film capacitor for typical convection soldering processes.

Due to the diverse procedures and the varying heat requirements of the different types of components, an exact processing temperature for re-flow soldering processes cannot be specified. The graph shows the upper limits of temperature and time which

must not be exceeded when establishing the solder profile according to your actual requirements.

A max. temperature of $T = 210^\circ\text{C}$ inside the component should not be exceeded when processing WIMA SMD capacitors.

SMD Handsoldering

WIMA SMD capacitors with plastic film dielectric are generally suitable for hand-soldering with a soldering iron where, however, similar to automated soldering processes, a certain duration and temperature should not be exceeded. These parameters are dependent on the physical size of the components and the relevant heat absorption involved.

The below data are to be regarded as guideline values and should serve to avoid damage to the dielectric caused by excessive heat during the soldering process. The soldering quality depends on the tool used and on the skill and experience of the person with the soldering iron in hand.

Size code	Temperature °C / °F	Time duration
1812	225 / 437	2 sec plate 1 / 5 sec off / 2 sec plate 2
2220	225 / 437	3 sec plate 1 / 5 sec off / 3 sec plate 2
2824	250 / 482	3 sec plate 1 / 5 sec off / 3 sec plate 2
4030	260 / 500	5 sec plate 1 / 5 sec off / 5 sec plate 2
5040	260 / 500	5 sec plate 1 / 5 sec off / 5 sec plate 2
6054	260 / 500	5 sec plate 1 / 5 sec off / 5 sec plate 2

Recommendation for Processing and Application of SMD Capacitors (Continuation)

Solder Paste

To obtain the best soldering performance we suggest the use of following solder paste alloy:

Lead free solder paste

Sn - Bi
Sn - Zn (Bi)
Sn - Ag - Cu

Solder paste with lead

Sn - Pb - Ag (Sn60-Pb40-A, Sn63-Pb37-A)

Initial Operation/Calibration

Due to the stress which the components are subjected to during processing, reversible parameter changes occur in almost all electronic components. The capacitance recovery accuracy to be expected with careful processing is within a scope of

$$|\Delta C/C| \leq 5\%.$$

For the initial operation of the device a minimum storage time of

$$t \geq 24 \text{ hours}$$

is to be taken into account. With calibrated devices or when the application is largely dependent on capacitance it is advisable to prolong the storage time to

$$t \geq 10 \text{ days}$$

In this way ageing effects of the capacitor structure can be anticipated. Parameter changes due to processing are not to be expected after this period of time

Humidity Protection Bags

Taped WIMA SMD capacitors are shipped in humidity protection bags according to JEDEC standard, level 1 (EMI/static-shielding bags conforming to MIL-B 81705, Type 1, Class 1). Under controlled conditions the components can be stored two years

and more in the originally sealed bag. Opened packing units should be consumed instantly or resealed for specific storage under controlled conditions.

now be used for all the demanding capacitor applications for which, in the past, the use of through-hole components was mandatory:

- measuring techniques
- oscillator circuits
- differentiating and integrating circuits
- A/D or D/A transformers
- sample and hold circuits
- automotive electronics

Reliability

Taking account of the manufacturer's guidelines and compatible processing, the WIMA SMD stand out for the same high quality and reliability as the analogous through-hole WIMA series. The technology of metallized film capacitors used e.g. in WIMA SMD-PET achieves the best values for all fields of application. The expected value is about:

$$\lambda_0 \leq 2 \text{ fit}$$

Furthermore the production of all WIMA components is subject to the regulations laid down by ISO 9001:2008 as well as the guidelines for component specifications set out by IEC quality assessment system (IECQ-CECC) for electronic components.

With the WIMA SMD programme available today, the major part of all plastic film capacitors can be replaced by WIMA SMD components. The field of application ranges from standard coupling capacitors to use in switch-mode power supplies as filter or charging capacitors with high voltage and capacitance values, as well as in telecommunications e.g. the well-known telephone capacitor 1μF/250VDC.

Electrical Characteristics and Fields of Application

Basically the WIMA SMD series have the same electrical characteristics as the analogous through-hole WIMA capacitors. Compared to ceramic or tantalum dielectrics WIMA SMD capacitors have a number of other outstanding qualities:


- favourable pulse rise time
- low ESR
- low dielectric absorption
- available in high voltage series
- large capacitance spectrum
- stand up to high mechanical stress
- good long-term stability

As regards technical performance as well as quality and reliability, the WIMA SMD series offer the possibility to cover nearly all applications of conventionally through-hole film capacitors with SMD components. Furthermore, the WIMA SMD series can




Blister Tape Packaging and Packing Units of the WIMA SMD Capacitors

Tape reel:

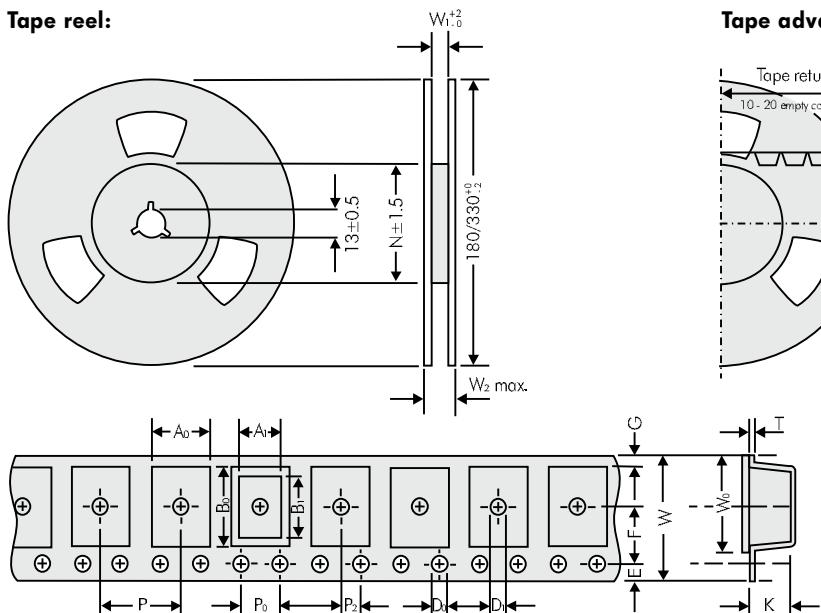

Tape advance and return:

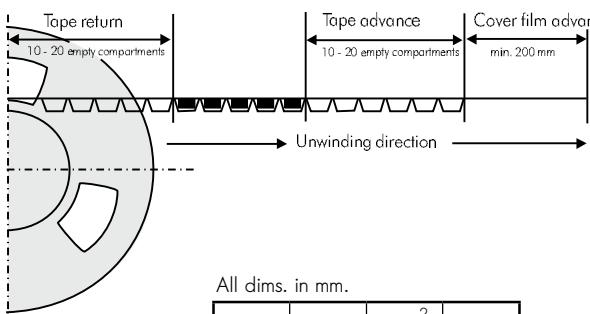

All dims. in mm.

Type	W2max	W1± ² ₀	N±1.5
1812	19	12.4	62
2220	19	12.4	62
2824	19	12.4	62
4030	22.4	16.4	60
5040	30.4	24.4	90
6054	30.4	24.4	90

Packing units

Size Code 1812		A ₀ ±0.1	A ₁ ±0.1	B ₀ B ₁	D ₀ +0.1 -0	D ₁ +0.1 -0	P ±0.1	P ₀ * ±0.1	P ₂ ±0.05	E ±0.1	F ±0.05	G	W ±0.3	W ₀ ±0.2	K ±0.1	T ±0.1	
Box size	Code																
4.8x3.3x3	KA	3.55	3.3	5.1	4.8	Ø1.5	Ø1.5	8	4	2	1.75	5.5	2.2	12	9.5	3.4	0.3
4.8x3.3x4	KB	3.55	3.3	5.1	4.8	Ø1.5	Ø1.5	8	4	2	1.75	5.5	2.2	12	9.5	4.4	0.3

	taped Reel 180 mm Ø	taped Reel 330 mm Ø	bulk
	Mini	Standard	
750	2500	1000	3000
500	2000	1000	3000

Size Code 2220		A ₀ ±0.1	A ₁ ±0.1	B ₀ B ₁	D ₀ +0.1 -0	D ₁ +0.1 -0	P ±0.1	P ₀ * ±0.1	P ₂ ±0.05	E ±0.1	F ±0.05	G	W ±0.3	W ₀ ±0.2	K ±0.1	T ±0.1	
Box size	Code																
5.7x5.1x3.5	QA	6.3	5.7	5.6	5.1	Ø1.5	Ø1.5	8	4	2	1.75	5.5	1.95	12	9.5	3.7	0.3
5.7x5.1x4.5	QB	6.3	5.7	5.6	5.1	Ø1.5	Ø1.5	8	4	2	1.75	5.5	1.95	12	9.5	4.7	0.3

	taped Reel 180 mm Ø	taped Reel 330 mm Ø	bulk
	Mini	Standard	
500	1800	1000	3000
400	1500	1000	3000

Size Code 2824		A ₀ ±0.1	A ₁ ±0.1	B ₀ B ₁	D ₀ +0.1 -0	D ₁ +0.1 -0	P ±0.1	P ₀ * ±0.1	P ₂ ±0.05	E ±0.1	F ±0.05	G	W ±0.3	W ₀ ±0.2	K ±0.1	T ±0.1	
Box size	Code																
7.2x6.1x3	TA	6.6	6.1	7.7	7.2	Ø1.5	Ø1.5	12	4	2	1.75	5.5	0.9	12	9.5	3.4	0.3
7.2x6.1x5	TB	6.6	6.1	7.7	7.2	Ø1.5	Ø1.5	12	4	2	1.75	5.5	0.9	12	9.5	5.4	0.4

	taped Reel 330 mm Ø	bulk
	Mini	Standard
1500	500	2000
750	500	2000

Size Code 4030		A ₀ ±0.1	A ₁ ±0.1	B ₀ B ₁	D ₀ +0.1 -0	D ₁ +0.1 -0	P ±0.1	P ₀ * ±0.1	P ₂ ±0.05	E ±0.1	F ±0.05	G	W ±0.3	W ₀ ±0.2	K ±0.1	T ±0.1	
Box size	Code																
	VA	10.7	10.2	8.1	9.1	Ø1.5	Ø1.5	16	4	2	1.75	7.5	1.9	16	13.3	5.5	0.3
	XA	13.5	12.7	11	11.5	Ø1.5	Ø1.5	16	4	2	1.75	11.5	4.7	24	21.3	6.5	0.3
	YA	17.0	16.5	15.6	15.0	Ø1.5	Ø1.5	20	4	2	1.75	11.5	2.95	24	21.3	7.5	0.3

	taped Reel 330 mm Ø	bulk
	Mini	Standard
775	500	2000
600	200	1000
450	100	500

Part number codes for SMD packing

W (Blister)	Ø in mm	Code
12	180	P
12	330	Q
16	330	R
24	330	T
Bulk Standard		S



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Special features (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Lead length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2		63 VDC		0.01 μ F		2.5x6.5x7.2		-		20%		bulk		6 -2			
Type description:		Rated voltage:		Capacitance:		Size:		Tolerance:		Packing:							
SMD-PET = SMDT		2.5 VDC = A1		22 pF = 0022		4.8x3.3x3 Size 1812 = KA		20% = M		AMMO H16.5 340x340 = A							
SMD-PPS = SMDI		4 VDC = A2		47 pF = 0047		4.8x3.3x4 Size 1812 = KB		10% = K		AMMO H16.5 490x370 = B							
FKP 02 = FKPO		14 VDC = A3		100 pF = 0100		5.7x5.1x3.5 Size 2220 = QA		5% = J		AMMO H18.5 340x340 = C							
MKS 02 = MKS0		28 VDC = A4		150 pF = 0150		5.7x5.1x4.5 Size 2220 = QB		2.5% = H		AMMO H18.5 490x370 = D							
FKS 2 = FKS2		40 VDC = A5		220 pF = 0220		7.2x6.1x3 Size 2824 = TA		1% = E		REEL H16.5 360 = F							
FKP 2 = FKP2		5 VDC = A6		330 pF = 0330		7.2x6.1x5 Size 2824 = TB		...		REEL H16.5 500 = G							
MKS 2 = MKS2		50 VDC = B0		470 pF = 0470		10.2x7.6x5 Size 4030 = VA		...		REEL H18.5 360 = H							
MKP 2 = MKP2		63 VDC = C0		680 pF = 0680		12.7x10.2x6 Size 5040 = XA		...		REEL H18.5 490x370 = I							
FKS 3 = FKS3		100 VDC = D0		1000 pF = 1100		15.3x13.7x7 Size 6054 = YA		...		REEL H18.5 500 = J							
FKP 3 = FKP3		160 VDC = E0		1500 pF = 1150		2.5x7x4.6 PCM 2.5 = OB		...		ROLL H16.5 = K							
MKS 4 = MKS4		250 VDC = F0		2200 pF = 1220		3x7.5x4.6 PCM 2.5 = OC		...		ROLL H18.5 = L							
MKP 4 = MKP4		400 VDC = G0		3300 pF = 1330		2.5x6.5x7.2 PCM 5 = 1A		...		REEL H18.5 360 = M							
MKP 10 = MKP1		450 VDC = H0		4700 pF = 1470		3x7.5x7.2 PCM 5 = 1B		...		REEL H18.5 490x370 = N							
FKP 4 = FKP4		600 VDC = I0		6800 pF = 1680		2.5x7x10 PCM 7.5 = 2A		...		REEL H18.5 500 = O							
FKP 1 = FKP1		630 VDC = J0		0.01 μ F = 2100		3x8.5x10 PCM 7.5 = 2B		...		BLISTER W12 180 = P							
MKP-X2 = MKX2		700 VDC = K0		0.022 μ F = 2220		3x9x13 PCM 10 = 3A		...		BLISTER W12 330 = Q							
MKP-X2 R = MKXR		800 VDC = L0		0.047 μ F = 2470		4x9x13 PCM 10 = 3C		...		BLISTER W16 330 = R							
MKP-Y2 = MKY2		850 VDC = M0		0.1 μ F = 3100		5x11x18 PCM 15 = 4B		...		BLISTER W24 330 = T							
MP 3-X2 = MPX2		900 VDC = N0		0.22 μ F = 3220		6x12.5x18 PCM 15 = 4C		...		Bulk Standard = S							
MP 3-X1 = MPX1		1000 VDC = O0		0.47 μ F = 3470		5x14x26.5 PCM 22.5 = 5A		...		TPS Standard = Y							
MP 3-Y2 = MPY2		1100 VDC = P0		1 μ F = 4100		6x15x26.5 PCM 22.5 = 5B		...									
MP 3R-Y2 = MPRY		1200 VDC = Q0		2.2 μ F = 4220		9x19x31.5 PCM 27.5 = 6A		...									
Snubber MKP = SNMP		1250 VDC = R0		4.7 μ F = 4470		11x21x31.5 PCM 27.5 = 6B		...									
Snubber FKP = SNFP		1500 VDC = S0		10 μ F = 5100		9x19x41.5 PCM 37.5 = 7A		...									
GTO MKP = GTOM		1600 VDC = T0		22 μ F = 5220		11x22x41.5 PCM 37.5 = 7B		...									
DC-LINK MKP 4 = DCP4		2000 VDC = U0		47 μ F = 5470		94x49x182 DCH_ = HO		...									
DC-LINK MKP 5 = DCP5		2500 VDC = V0		100 μ F = 6100		94x77x182 DCH_ = H1		...									
DC-LINK MKP 6 = DCP6		3000 VDC = W0		220 μ F = 6220										
DC-LINK HC = DCH_		4000 VDC = X0		1 F = A010										
SuperCap C = SCSC		6000 VDC = Y0		2.5 F = A025										
SuperCap MC = SCMC		250 VAC = 0W		50 F = A500										
SuperCap R = SCSR		275 VAC = 1W		100 F = B100										
SuperCap MR = SCMR		300 VAC = 2W		110 F = B110										
...		400 VAC = 3W		600 F = B600										
...		440 VAC = 4W		1200 F = C120										
...		500 VAC = 5W										

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.