

Radial Leads/SkyCap®



GENERAL INFORMATION

AVX SR Series


Conformally Coated Radial Leaded MLC

Temperature Coefficients: C0G (NPO), X7R, Z5U

200, 100, 50 Volts (300V, 400V & 500V also available)

Case Material: Epoxy

Lead Material: Solderable

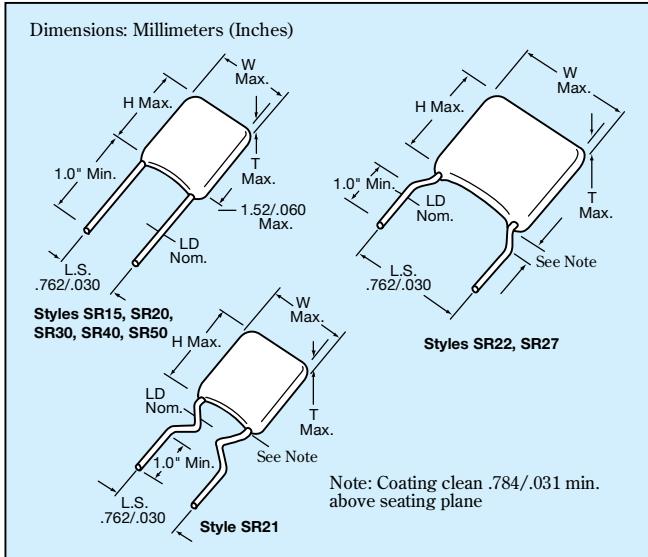

HOW TO ORDER

SR21

5

E

104

M

A

R

AVX Style

Voltage

Temperature Coefficient

Capacitance
First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, order 100,000 pF as 104. (For values below 10pF use "R" in place of decimal point, e.g., 1R4 = 1.4pF.)

Capacitance Tolerance

C0G (NPO):	X7R:
C = $\pm 25\text{pF}$	J = $\pm 5\%$
D = $\pm 5\text{pF}$	K = $\pm 10\%$
F = $\pm 1\%$	M = $\pm 20\%$
$(>50\text{pF only})$	
G = $\pm 2\%$	Z5U:
$(>25\text{pF only})$	
J = $\pm 5\%$	M = $\pm 20\%$
K = $\pm 10\%$	Z = $+80\%$ -20%

Failure Rate


A = Not Applicable

Leads


T = Trimmed Leads
.230" $\pm .030"$
A = Long Leads
1.0" minimum
(Other lead lengths are available, contact AVX)
R = RoHS
Long Lead
1.0" minimum

MARKING

FRONT



BACK



PACKAGING REQUIREMENTS

		Quantity per Bag
SR15, 20, 21, 22, 27, 30		1000 Pieces
SR40, 50		500 Pieces

Note: SR15, SR20, SR21, SR30, and SR40 available on tape and reel per EIA specifications RS-468. See Pages 29 and 30.



Radial Leads/SkyCap®



C0G (NP0) Dielectric

SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic									Dimensions: Millimeters (Inches)														
AVX Style	SR15			SR20			SR21			SR22			SR27			SR30		SR40		SR50			
AVX "Insertable"	SR07			SR29			SR59			N/A			N/A			SR65		SR75		N/A			
Width (W)	3.81 (.150)			5.08 (.200)			5.08 (.200)			5.08 (.200)			6.604 (.260)			7.62 (.300)		10.16 (.400)		12.70 (.500)			
Height (H)	3.81 (.150)			5.08 (.200)			5.08 (.200)			5.08 (.200)			6.35 (.250)			7.62 (.300)		10.16 (.400)		12.70 (.500)			
Thickness (T)	2.54 (.100)			3.175 (.125)			3.175 (.125)			3.175 (.125)			4.06 (.160)			3.81 (.150)		3.81 (.150)		5.08 (.200)			
Lead Spacing (L.S.)	2.54 (.100)			2.54 (.100)			5.08 (.200)			6.35 (.250)			7.62 (.300)			5.08 (.200)		5.08 (.200)		10.16 (.400)			
Lead Diameter (L.D.)	.508 (.020)			.508 (.020)			.508 (.020)			.508 (.020)			.508 (.020)			.508 (.020)		.508 (.020)		.635 (.025)			
Cap. in.* Industry Preferred pF Values in Blue	WVDC 200 100 50			WVDC 200 100 50			WVDC 200 100 50			WVDC 200 100 50			WVDC 200 100 50			WVDC 100 50		WVDC 100 50		WVDC 100 50			
1.0-9.9 10 15	SR151A1R0DAA SR151A100KAA SR.....A150KAA																						
22 33 39	SR.....A220KAA SR.....A330KAA SR.....A390KAA																						
47 68 100	SR.....A470KAA SR.....A680KAA SR151A101KAA																						
150 220 330	SR.....A151KAA SR.....A221KAA SR.....A331KAA																						
390 470 680	SR.....A391KAA SR.....A471KAA SR.....A681KAA																						
1000 1500 2200	SR211A102KAA SR.....A152KAA SR.....A222KAA																						
3900 4700 6800	SR.....A392KAA SR.....A472KAA SR.....A682KAA																						
8200 10,000 15,000	SR.....A822KAA SR305A103KAA SR.....A153KAA																						
22,000 33,000 39,000	SR.....A223KAA SR.....A333KAA SR.....A393KAA																						
47,000 68,000 100,000	SR.....A473KAA SR.....A683KAA SR.....A104KAA																						

For other styles, voltages, tolerances and lead lengths see Part No. Codes or contact factory.

*Other capacitance values available upon special request.

= Industry preferred values

= SR20 only

NOTE: Capacitance Ranges available for SR12 same as SR15
 SR62 same as SR21
 SR64 same as SR30
 SR89 same as SR21

Radial Leads/SkyCap®



X7R Dielectric

SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic		Dimensions: Millimeters (Inches)																	
AVX Style	SR15	SR20			SR21			SR22			SR27			SR30			SR40		
AVX "Insertable"	SR07	SR29			SR59			N/A			N/A			SR65			SR75		
Width (W)		3.81 (.150)		5.08 (.200)		5.08 (.200)		5.08 (.200)		6.604 (.260)		7.62 (.300)		10.16 (.400)		12.70 (.500)			
Height (H)		3.81 (.150)		5.08 (.200)		5.08 (.200)		5.08 (.200)		6.35 (.250)		7.62 (.300)		10.16 (.400)		12.70 (.500)			
Thickness (T)		2.54 (.100)		3.175 (.125)		3.175 (.125)		3.175 (.125)		4.06 (.160)		3.81 (.150)		3.81 (.150)		5.08 (.200)			
Lead Spacing (L.S.)		2.54 (.100)		2.54 (.100)		5.08 (.200)		6.35 (.250)		7.62 (.300)		5.08 (.200)		5.08 (.200)		10.16 (.400)			
Lead Diameter (L.D.)		.508 (.020)		.508 (.020)		.508 (.020)		.508 (.020)		.508 (.020)		.508 (.020)		.508 (.020)		.635 (.025)			
Cap. in.* Industry Preferred pF Values in Blue		WVDC 200 100 50			WVDC 200 100 50			WVDC 200 100 50			WVDC 100 50			WVDC 100 50			WVDC 200 100 50		
470 SR_____C471KAA																			
1000 SR155C102KAA																			
1500 SR_____C152KAA																			
2200 SR_____C222KAA																			
3300 SR_____C332KAA																			
4700 SR_____C472KAA																			
6800 SR_____C682KAA																			
10,000 SR215C103KAA																			
15,000 SR_____C153KAA																			
22,000 SR_____C223KAA																			
33,000 SR_____C333KAA																			
47,000 SR_____C473KAA																			
68,000 SR_____C683KAA																			
100,000 SR215C104KAA																			
150,000 SR_____C154KAA																			
220,000 SR215C224KAA																			
330,000 SR_____C334KAA																			
390,000 SR_____C394KAA																			
470,000 SR305C474KAA																			
1.0 µF SR305C105KAA																			
2.2 µF SR405C225KAA																			
2.7 µF SR505C275KAA																			
4.7 µF SR505C475KAA																			

For other styles, voltages, tolerances and lead lengths see Part No. Codes or contact factory.

*Other capacitance values available upon special request.

-  = Industry preferred values
-  = SR20 only
-  = Extended range
-  = Extended range, SR20 only
-  = Extended range with 0.150" thickness maximum

NOTE: Capacitance Ranges available for SR12 same as SR15
 SR62 same as SR21
 SR64 same as SR30
 SR89 same as SR21



Radial Leads/SkyCap®



Z5U Dielectric

SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic		Dimensions: Millimeters (Inches)											
AVX Style	SR15	SR20		SR21		SR22		SR27		SR30	SR40	SR50	
AVX "Insertable"	SR07	SR29		SR59		N/A		N/A		SR65	SR75	N/A	
Width (W)	3.81 (.150)	5.08 (.200)		5.08 (.200)		5.08 (.200)		6.604 (.260)		7.62 (.300)	10.16 (.400)	12.70 (.500)	
Height (H)	3.81 (.150)	5.08 (.200)		5.08 (.200)		5.08 (.200)		6.35 (.250)		7.62 (.300)	10.16 (.400)	12.70 (.500)	
Thickness (T)	2.54 (.100)	3.175 (.125)		3.175 (.125)		3.175 (.125)		4.06 (.160)		3.81 (.150)	3.81 (.150)	5.08 (.200)	
Lead Spacing (L.S.)	2.54 (.100)	2.54 (.100)		5.08 (.200)		6.35 (.250)		7.62 (.300)		5.08 (.200)	5.08 (.200)	10.16 (.400)	
Lead Diameter (L.D.)	.508 (.020)	.508 (.020)		.508 (.020)		.508 (.020)		.508 (.020)		.508 (.020)	.508 (.020)	.635 (.025)	
Cap. in.* Industry Preferred pF Values in Blue	WVDC 100 50		WVDC 100 50		WVDC 100 50		WVDC 100 50		WVDC 100 50		WVDC 100 50		
10,000 SR155E103ZAA													
47,000 SR_____E473ZAA													
100,000 SR215E104ZAA													
150,000 SR_____E154ZAA													
220,000 SR215E224ZAA													
330,000 SR215E334ZAA													
470,000 SR215E474ZAA													
680,000 SR_____E684ZAA													
1.0 µF SR_____105ZAA													
1.5 µF SR30E155ZAA													
2.2 µF SR30E225ZAA													
3.3 µF SR30E335ZAA													
4.7 µF SR30E475ZAA													

For other styles, voltages, tolerances and lead lengths see Part No. Codes or contact factory.

*Other capacitance values available upon special request.

= Industry preferred values

= SR20 only

AVX 500 VOLT SKYCAPS**

STYLE*	MAXIMUM CAPACITANCE VALUE	
	C0G (NP0)	X7R
SR29	900 pF	.015 µF
SR20	1800 pF	.033 µF
SR28 SR59	900 pF	.015 µF
SR13 SR21	1800 pF	.033 µF
SR30 SR61 SR65	7200 pF	.12 µF
SR40 SR75	.015 µF	.27 µF
SR22	1800 pF	.033 µF
SR27	1800 pF	.033 µF
SR76	.015 µF	.27 µF
SR50	.036 µF	.59 µF

*Consult pages 22 and 23 for style sizes.

**Voltage rating based on DWV of 150% of rated voltage.

SkyCap®/AR Series

Configurations by Lead Spacing



LEAD SPACING .100 ±.030				Dimensions: Inches (Millimeters)
AR07/SR07* (T=.100)	AR14/SR14 (T=.100)	AR15/SR15* (T=.100)	AR20/SR20* (T=.125)	
.250 (6.35) Max. 1.0 (25.4) Min. .100 (2.54) ±.030	.200 (5.08) Max. Meniscus Free .031 (.787) Above Seating Plane .050 (1.27) Clean Above Seating Plane .300 (7.62) Max. .230 (5.84) ±.030 .100 (2.54) ±.030	.060 (1.52) Max. .100 (2.54) ±.030	.200 (5.08) Max. .200 (5.08) Max. 1.0 (25.4) Min. .060 (1.52) Max. .100 (2.54) ±.030	
AR29/SR29* (T=.125)	AR62/SR62* (T=.125)	SR62-LP* (T=.100)		
.200 (5.08) Max. Meniscus Free .031 (.787) Above Seating Plane .250 (6.35) Max. 1.0 (25.4) Min. .100 (2.54) ±.030	.358 (9.09) Max. 0.008 ±.002 (.203 ±.051) .100 ±.031 (.254 ±.0787)	.210 (5.33) Max. .040 (1.016) Min.	.170 (4.32) Max. 0.04 (1.02) Min. .271 (6.88) Max. 1.0 (25.4) Min. .100 (2.54) ±.030	
	Leads = #22 AWG	Leads = #22 AWG		

LEAD SPACING .200 ±.030					Dimensions: Inches (Millimeters)
AR12/SR12* (T=.100)	SR13* (T=.125)	AR21/SR21* (T=.125)	SR21-85* (T=.125)	SR28* (T=.125)	
.150 (3.81) Max. .230 (5.84) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	.200 (5.08) Max. Meniscus Free .031 (.787) Above Seating Plane .350 (8.89) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	.200 (5.08) Max. .300 (7.62) Max. 0.031 (.787) Clean Above Seat 1.0 (25.4) Min. .200 (5.08) ±.030	.200 (5.08) Max. Meniscus Free .031 (.787) Above Seating Plane .300 (7.62) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	.200 (5.08) Max. Meniscus Free .031 (.787) Above Seating Plane .250 (6.35) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	
AR30/SR30* (T=.150)	SR30-LP* (T=.150)	AR32/SR32* (T=.150)	AR40/SR40* (T=.150)	AR59/SR59* (T=.125)	
.300 (7.62) Max. .060 (1.52) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	.300 (7.62) Max. .059 (1.5) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	.300 (7.62) Max. Meniscus Free .031 (.787) Above Seating Plane .390 (9.91) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	.400 (10.16) Max. .060 (1.52) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	.200 (5.08) Max. 0.031 (.787) Clean Above Seat .300 (7.62) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	
SR61 (T=.150)	SR63* (T=.150)	SR64* (T=.150)	SR64-LP* (T=.150)	AR65/SR65* (T=.150)	
.300 (7.62) Max. Meniscus Free .031 (.787) Above Seating Plane .500 (12.7) Max. .230 (5.84) ±.030 .100 (2.54) ±.030	.300 (7.62) Max. 1.0 (25.4) Min. .500 (12.7) Max. (.348/.196) (.98) .100 (2.54) ±.030	.0040 (1.02) Min. a = .009 ±.002 (.229 ±.051) .500 (12.7) Max. 1.0 (25.4) Min. .200 (5.08) ±.031	.268 (6.81) Max. 0.04 (1.02) Min. .330 (8.38) Max. 1.0 (25.4) Min. .200 (5.08) ±.030	.300 (7.62) Max. 1.0 (25.4) Min. .400 (10.16) Max. .200 (5.08) ±.030	
	Leads = #22 AWG		Leads = #22 AWG		

SkyCap®/AR Series

Configuration by Lead Spacing



LEAD SPACING .200 ±.030 continued

Dimensions: Inches (Millimeters)

SR65-LP* (T=.150)	SR67 (T=.125)	AR75/SR75* (T=.150) Leads = #22 AWG	AR89/SR89* (T=.125) Leads = #22 AWG

LEAD SPACING .250 ±.030

Dimensions: Inches (Millimeters)

SR16 (T=.125)	SR22 (T=.125)	SR33 (T=.150)

LEAD SPACING .300 ±.030

SR27 (T=.150)	SR34 (T=.150)

LEAD SPACING .375 ±.030

AR38/SR38 (T=.150)

LEAD SPACING .400 ±.030

SR50 (T=.200)	SR76 (T=.175)

Leads = #22 AWG

- NOTES:**
1. All leads are #24 AWG unless otherwise noted.
 2. Available in tape and reel packaging(“).
 3. Other styles are also available, contact factory.
 4. (T = XXX) under type designation is maximum thickness in inches.

Radial Leads/Packaging

Tape and Reel



GENERAL INFORMATION

- Standard reel diameter is 355 millimeters (14 inches) maximum.
- Reeling standard (#1 or #2) should be specified when ordering.




HOW TO ORDER

To specify tape and reel packaging, add TR1, TR2 or TRX to the end of the AVX 12 digit part number.

Examples:

SR215C104KAATR1
SR305E105MAATR2
SR215C103JAATRX

THE INSERTABLES

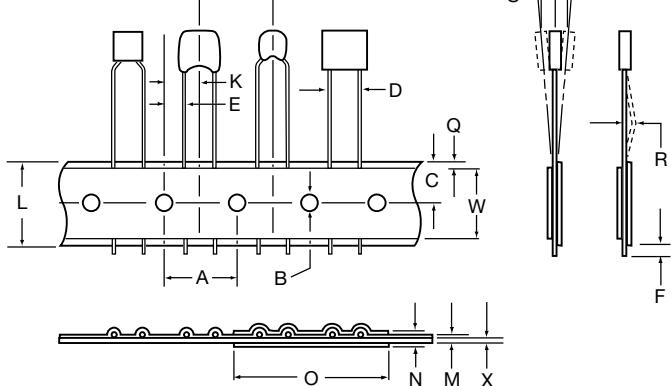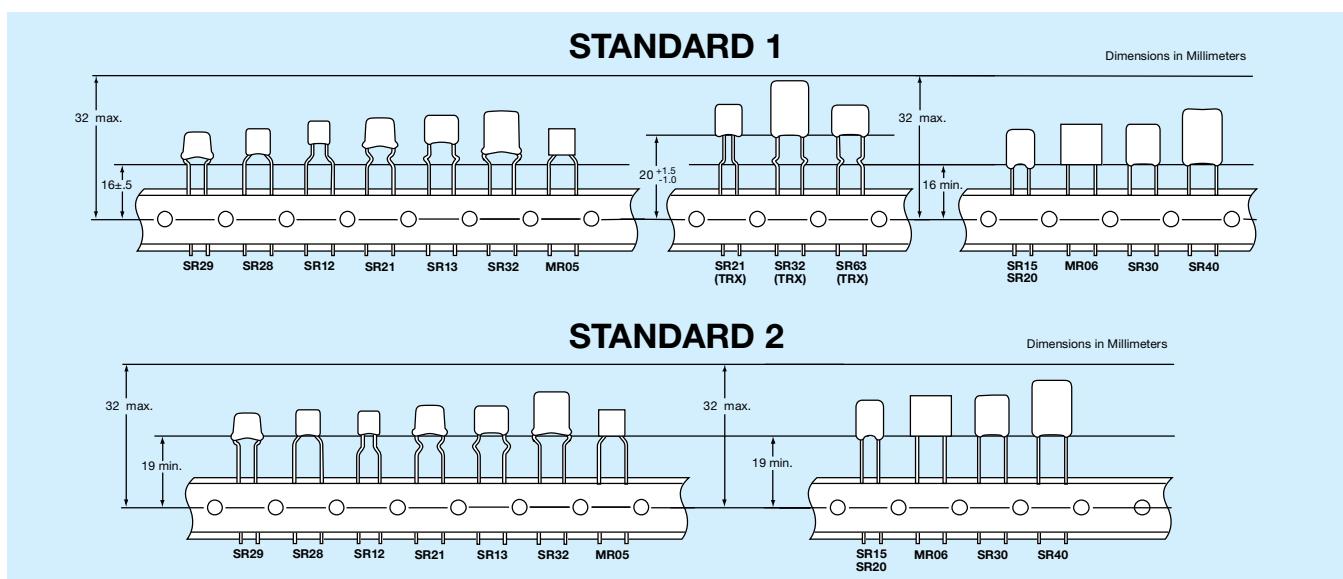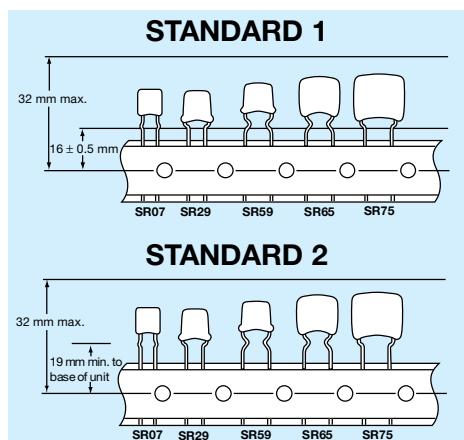

DESCRIPTION


	DIMENSIONS (MM)
A. Feed Hole Pitch	12.70 ± .20
B. Feed Hole Diameter	3.99 ± .20
C. Feed Hole Location	9.02 ± .51
D. Component Lead Spacing	5.00 ^{+.79} _{-.20} or 2.54 ^{+.79} _{-.20}
E. Component Lead Location	3.81 ± .51 or 5.00 ± .51 for 2.54 lead spacing
F. Component Lead Protrusion (edge of carrier to cut end of lead)	2.00 maximum
K. Component Body Location	6.35 ± .41
L. Carrier Tape Width	18.01 ^{+.102} _{-.51}
M. Carrier Tape Assembly Thickness	.71 ± .20
N. Carrier Tape Spliced Thickness	1.42 maximum
O. Carrier Tape Spliced Length	50.80 - 88.90
Q. Adhesive Tape Border	3.00 maximum
R. Component Bent Leads (either direction)	.79 maximum
S. Component Misalignment	.99 maximum
T. Component Pitch	12.70 ± .99
W. Adhesive Tape Width	5.00 minimum
X. Carrier Tape Thickness	.51 ± .10
Y. Cumulative Pitch over 20 Pitches	254 ± 2.00



Radial Leads/Packaging




REEL DIRECTION

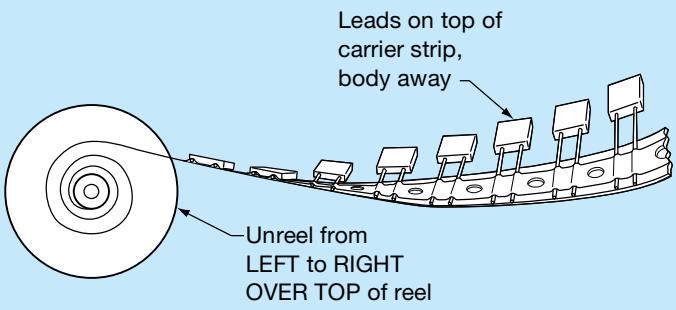

QUANTITY PER REEL SR/AR

PART	PCS
SR15, 07, 12	3500
SR20, 21, 23, 28 13, 29, 59, 62, 89	3000
SR30, 32, 40, 63, 64 65, 75	2000
MR05, 06	2500

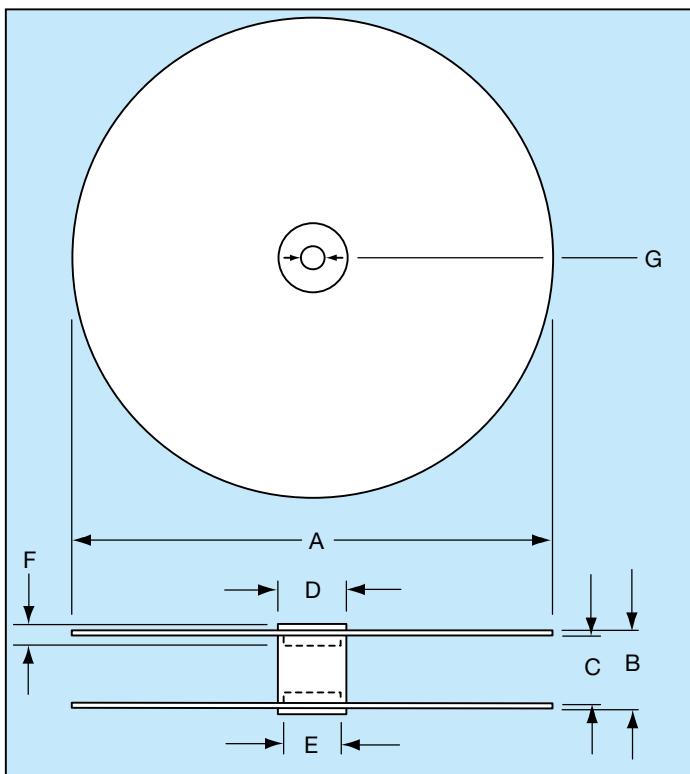

DESCRIPTION	DIMENSIONS (MM)
A – Reel Diameter	304.80 - 355
B – Reel Outside Width	50.80 maximum
C – Reel Inside Width	38.10 - 46.02
D – Core Diameter (O.D.)	102.01 maximum
E – Hub Recess Diameter	86.36 maximum
F – Hub Recess Depth	9.50 minimum
G – Arbor Hole Diameter	25.40 - 30.48

CONVERSION TABLE									
MM	IN	MM	IN	MM	IN	MM	IN	MM	IN
.10	.004	1.52	.060	5.00	.197	9.91	.390	32.00	1.260
.20	.007	2.00	.079	5.08	.200	10.03	.395	38.10	1.500
.38	.015	2.54	.100	6.22	.245	10.16	.400	46.02	1.812
.41	.016	3.00	.118	6.35	.250	11.68	.460	50.80	2.000
.51	.020	3.18	.125	6.60	.260	12.50	.492	86.36	3.400
.71	.028	3.48	.137	6.99	.275	12.70	.500	88.90	3.500
.79	.031	3.81	.150	7.62	.300	16.00	.630	102.01	4.016
.99	.039	3.99	.157	8.89	.350	18.01	.709	254.00	10.000
1.02	.040	4.45	.175	9.02	.355	25.40	1.000	304.80	12.000
1.42	.056	4.98	.196	9.50	.374	30.48	1.200	355.00	14.000