




**PIN HEADER „SMD“ 1,27 mm**  
**ID: 179**                      STL 21-XXXVD

Series 520

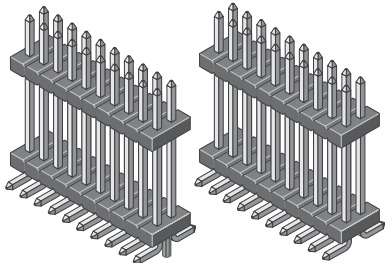

**TECHNICAL DATA**

Pitch	1,27 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	copper alloy
Rated Current	1 Amp.
Rated Voltage	150 V <sub>RMS</sub> /V <sub>DC</sub>
Withstanding Voltage	500 V <sub>AC</sub> for one minute
Operating Temperature	-40°C to +105°C
Maximum Soldering Temperature	260°C for 10 seconds

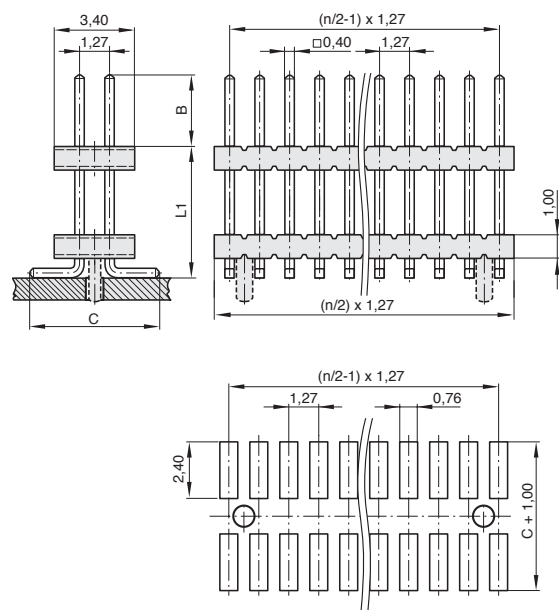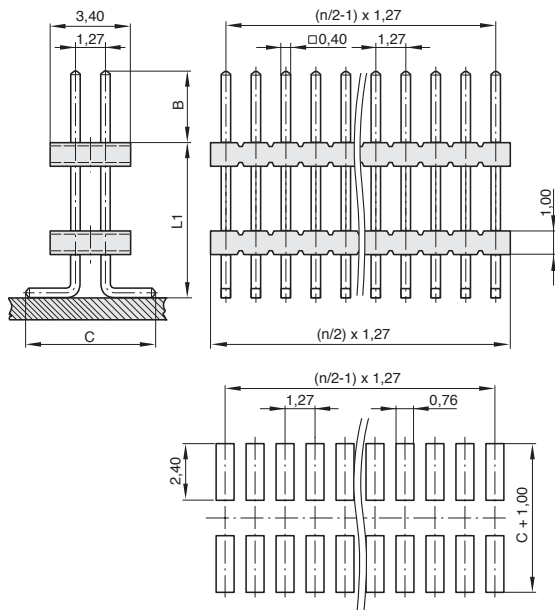

n = No. of Positions

Code	B	L1	C
0260	3,00	2,60	5,50
0268	3,00	2,68	4,50
0269	7,50	2,68	4,50
0358	3,00	3,58	5,50
0975	3,00	9,75	5,50
1041	3,00	10,41	5,50
Custom	_____	_____	_____

All dimensions in mm.  
 Other dimensions upon request.

**STL 21 - XXXX VD XX - XXX P U**

- 21: 2 rows, pitch 1,27mm
- Code: see table
- VD: SMD vertical sandwich
- Plating: TT = Sn  
 GT = sel. Au  
 GG = Au
- XX: \_\_\_\_\_
- XXX: \_\_\_\_\_
- P: Pos. Pin (optional)
- U: RoHS-compliant with high temp. plastic
- Poles: 6 - 100 contacts