

C&K Pushbutton Switches

Cannon



8020 SERIES: SNAP-ACTING MOMENTARY PUSHBUTTON SWITCHES

- Features:**
- Positive tactile feel
 - Epoxy sealed
- Applications:**
- Telecommunication equipment
 - Computer peripherals

- Specifications:**
- Contact Material: B- Cu alloy, w/ Au plate over Ni plate, Au plate terminal
G- Coin Ag, w/ Au plate over Ni plate, Au plate terminal
 - Contact Rating: B- 0.4VA @ 20VAC or DC max.
G- 0.4VA @ 20VAC or DC max., or 1A @ 120VAC

For quantities 500 and up, call for quote.

MOUSER STOCK NO.	ITT/Cannon Part No.	Fig.	Contact Form	Circuit () = Momentary	Contact Material	Price Each			
						1	25	100	250
PC Thru-Hole									
611-8121-222	8121SHCGE	A	SPDT	On - (On)	G	6.77	6.19	5.42	4.38
611-8125-222	8125SHCBE	A	SPDT	On - (On)	B	4.67	4.27	3.74	2.91
Right-Angle PC Thru-Hole									
611-8121-231	8121SD9AGE	B	SPDT	On - (On)	G	7.11	6.50	5.68	4.67
611-8121-290	8121SD9AV2GE	C	SPDT	On - (On)	G	7.21	6.59	5.77	4.76
611-8125-232	8125SD9AV2BE	C	SPDT	On - (On)	B	5.11	4.67	4.09	3.29
Solder Lug									
611-8121-221	8121SHZGE	D	SPDT	On - (On)	G	6.69	6.11	5.35	4.31
611-8125-231	8125SD9ABE	B	SPDT	On - (On)	B	5.01	4.58	4.00	3.20
611-8125-241	8125SHZBE	D	SPDT	On - (On)	B	4.59	4.19	3.67	2.84
611-8121-211	8121J81ZGE22	E	SPDT	On - (On)	G	7.39	6.75	5.91	4.91
611-8125-211	8125J81ZBE22	E	SPDT	On - (On)	B	5.29	4.83	4.23	3.44
611-8221-211	8221J81ZGE22	E	DPDT	On - (On)	G	10.75	9.82	8.60	7.25
611-8121-311	8121J83ZGE22	F	SPDT	On - (On)	G	7.39	6.75	5.91	4.91
V-Bracket									
611-8121-236	8121SD9V3GE	G	SPDT	On - (On)	G	7.07	6.46	5.66	4.64
611-8125-223	8125SD3V3BE	G	SPDT	On - (On)	B	4.97	4.54	3.98	3.17

8060 SERIES: ALTERNATE ACTION PUSHBUTTON SWITCHES

- Features:**
- Epoxy sealed
 - Long electrical life (50,000 cycles @ full load)

- Applications:**
- Telecommunication equipment
 - Computer peripherals
 - Instrumentation

- Specifications:**
- Contact Material: B- Cu alloy, w/ Au plate over Ni plate, Au plate terminal
G- Coin Ag, w/ Au plate over Ni plate, Au plate terminal
Q- Cu alloy, w/ Au plate, Ag plate terminal
 - Contact Rating: B- 0.4VA @ 20VAC or DC max.
G- 0.4VA @ 20VAC or DC max., or 1A @ 120VAC
Q- 6A @ 120VAC or 28VDC; 3A @ 250VAC

For quantities 500 and up, call for quote.

MOUSER STOCK NO.	ITT/Cannon Part No.	Fig.	Contact Form	Circuit () = Momentary	Contact Material	Price Each			
						1	25	100	250
Right-Angle PC Thru-Hole									
611-8168-221	8168SH9ABE2	H	SPDT	On-(On)	B	5.48	5.01	4.38	3.44
Solder Lug									
611-8161-201	8161SHZQE2	I	SPDT	On-On	Q	5.04	4.61	4.03	3.06
611-8168-203	8168LHZQE2	I	SPDT	On-(On)	Q	5.04	4.61	4.03	3.06
611-8168-202	8168SHZGE2	I	SPDT	On-(On)	G	5.29	4.83	4.23	3.27
611-8168-201	8168SHZQE2	I	SPDT	On-(On)	Q	5.04	4.61	4.03	3.06
611-8261-202	8261SHZGE2	I	DPDT	On-On	G	9.85	9.01	7.88	6.29
611-8261-201	8261SHZQE2	I	DPDT	On-On	Q	9.01	8.24	7.21	5.57
611-8261-211	8261J81ZGE22	J	DPDT	On-On	G	10.82	9.89	8.65	7.11

8500 SERIES: SUBMINIATURE PUSHBUTTON SWITCHES

- Features:**
- Reliable contact design
 - Epoxy Sealed

- Applications:**
- Telecommunication equipment
 - Computer peripherals
 - Instrumentation

- Specifications:**
- Contact Material: Q- Coin Ag, w/ Ag plate, Ag plate terminal
B- Cu alloy, w/ Au plate over Ni plate, Ag plate terminal
Q- (853x models) - 1A @ 120VAC or 28VDC
Q- (855x models) - 3A @ 120VAC or 28VDC
B- 0.4VA @ 20VAC or DC max.
 - Contact Rating: B- 0.4VA @ 20VAC or DC max.

For quantities 500 and up, call for quote.

MOUSER STOCK NO.	ITT/Cannon Part No.	Fig.	Contact Form	Circuit () = Momentary	Contact Material	Price Each			
						1	25	100	250
PC Thru-Hole									
611-8531-251	8531MCQE2	K	SPST	(On)-Off	Q	4.06	3.71	3.25	2.31
611-8533-251	8533MCQE2	K	SPST	On-(Off)	Q	4.52	4.13	3.61	2.58
Solder Lug									
611-8531-252	8531MZQE2	L	SPST	(On)-Off	Q	3.97	3.63	3.18	2.24
611-8532-252	8532MZQE2	M	SPST	(On)-Off	Q	3.97	3.63	3.18	2.24
611-8551-252	8551MZQE2	M	SPST	(On)-Off	Q	3.97	3.63	3.18	2.24
611-8532-261	8532T1ZBE2	N	SPST	(On)-Off	B	4.50	4.11	3.60	2.69


8600 SERIES: MICROMINIATURE PUSHBUTTON SWITCHES

- Features:**
- Ideal for applications where space is limited
 - Hardware included: nut, brass or nickel plated

- Specifications:**
- Contact Material: Q- Coin Ag, w/ Ag plate, Ag plate terminal
 - Contact Rating: Q- 500mA @ 120VAC or 28VDC

For quantities 500 and up, call for quote.

MOUSER STOCK NO.	ITT/Cannon Part No.	Fig.	Contact Form	Circuit () = Momentary	Contact Material	Price Each			
						1	25	100	250
PC Thru-Hole									
611-8631-261	8631CQD2	O	SPST	(On)-Off	Q	4.43	4.05	3.54	2.81
611-8632-261	8632CQD2	P	SPST	(On)-Off	Q	4.43	4.05	3.54	2.81
Solder Lug									
611-8631-252	8631ZQD2	Q	SPST	(On)-Off	Q	4.34	3.97	3.47	2.73
611-8632-252	8632ZQD2	R	SPST	(On)-Off	Q	4.34	3.97	3.47	2.73

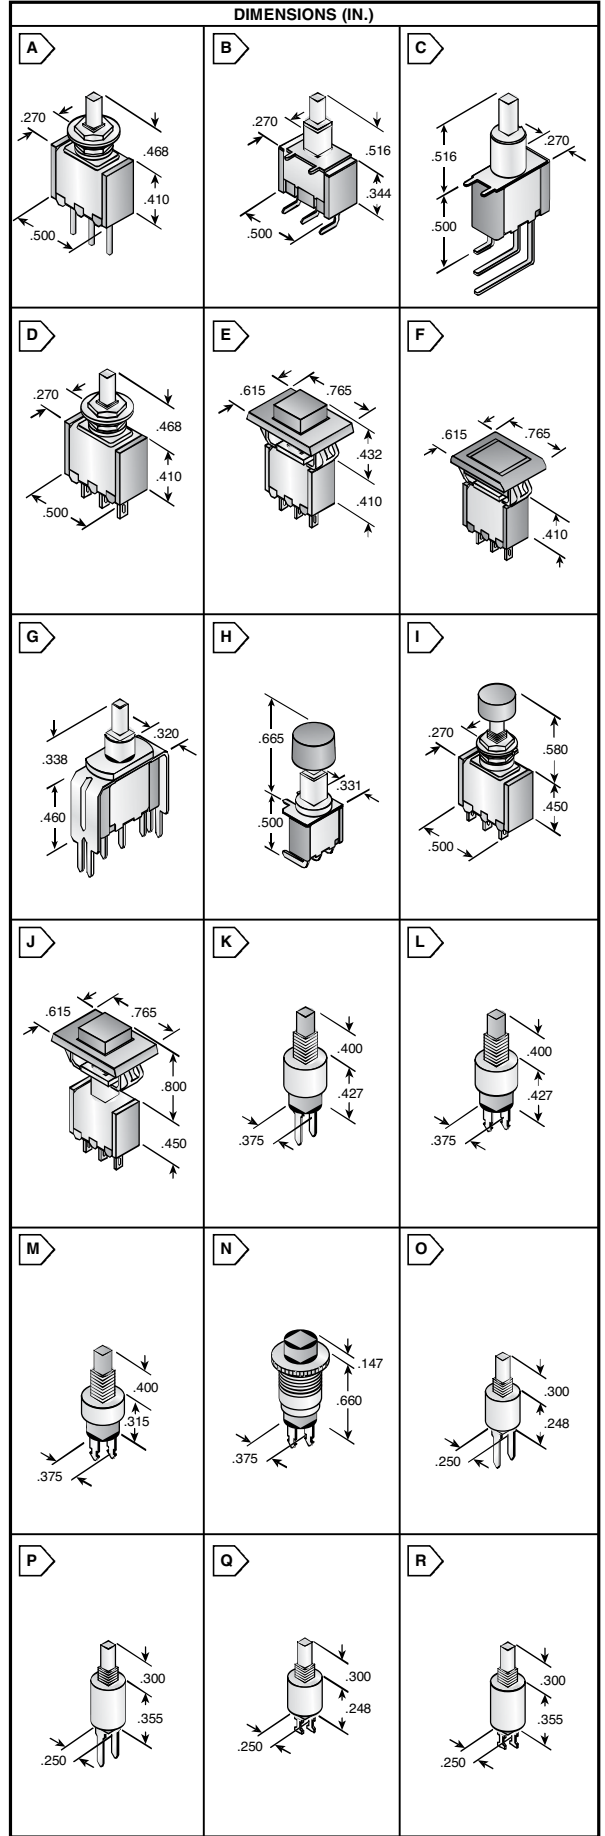

Catalog #621, February - April 2005
© Copyright 2005 Mouser Electronics

Catalog #621, February - April 2005
© Copyright 2005 Mouser Electronics

C&K Pushbutton Switches