

Plug-in relays

Zelio Relay

Catalogue
January

06



Selection guide	page 2
-----------------------	--------

RSB interface relays

■ Presentation, characteristics	pages 4 and 5
■ References	page 6
■ Dimensions, Schemes.....	page 7

RXM miniature relays

■ Presentation	page 8
■ Characteristics.....	pages 9 and 10
■ References	pages 11 and 12
■ Dimensions	pages 13 and 14
■ Schemes	page 15

RUM universal relays

■ Presentation	page 16
■ Characteristics.....	pages 17 and 18
■ References	pages 19 and 20
■ Dimensions	pages 21 and 22
■ Schemes	page 22
■ Setting-up	page 23

RPM power relays

■ Presentation	page 24
■ characteristics	pages 25 and 26
■ References	pages 27 and 28
■ Dimensions	pages 29 and 30
■ Schemes	page 31

RPF power relays

■ Presentation, characteristics	pages 32 and 33
■ References	page 34
■ Dimensions	page 35

Zelio Relay - plug-in relays

■ Technical appendices	pages 36 and 37
------------------------------	-----------------

Application	Plug-in relays	Miniature relays	
Number and type of contacts / conventional thermal current (I _{th} on N/O contact)	1 C/O / 16 A 1 C/O / 12 A 2 C/O / 8 A	2 C/O / 12 A 3 C/O / 10 A 4 C/O / 6 A 4 C/O / 3 A (low level)	
Control circuit voltage	~ ---	24...240 V 6...110 V	
Type of pins	Flat (Faston type)	Flat (Faston type)	
Operational voltage	Up to ~ 400 V / --- 300 V	Up to 250 V	
Durability (operating cycles)	Electrical, resistive load Mechanical, no-load	100 000 30 000 000	
Functions	LED Test button and mechanical indicator Low level contacts	Yes (with protection modules) Yes Yes	
Type reference	RSB	RXM	
Page	6	11 and 12	
  			
Conventional thermal current (I _{th})	12 A (1)	10 A	12 A (2)
Contact terminal arrangements	Separate	Mixed	Separate
Connection	Connector	Screw clamp terminals or connector	Connector
Accessories	Protection modules Timer module Maintaining clamps Socket identification legend Mounting adapters for U rail Mounting adapters with fixing lugs Bus jumper, 2-pole (I _{th} = 5 A)	Yes — Yes Yes — — —	Yes — Yes Yes (except RXZ E2M114) Yes Yes Yes
Associated socket types	RSZ E1S●●●	RXZ E2M●●●	RXZ E2S●●●
Pages	6	12	12

(1) When using relay RSB 1A160●● with socket RSZ E1S48M, terminals must be linked.

(2) Except for sockets RXZ E2S11●M: 10 A.

Universal relays



2 C/O / 10 A
3 C/O / 10 A
3 C/O / 3 A (low level)

24...230 V
12...220 V

Cylindrical

Up to 250 V

100 000
5 000 000

Yes (depending on version)
Yes
Yes

RUM

19



12 A

Mixed Separate

Connector

Yes

Yes

Yes

Yes

—

—

Yes

RUZ C•M

RUZ SC•M

RUZ SF3M

Power relays



2 C/O / 10 A
3 C/O / 10 A

12...110 V

Flat (Faston type)

Up to 250 V

100 000
10 000 000

Yes (depending on version)
Yes
—

RPM

27



1 C/O / 15 A
2 C/O / 15 A
3 C/O / 15 A
4 C/O / 15 A

24...230 V
12...110 V

Flat (Faston type)

Up to 250 V

100 000
10 000 000

Yes (depending on version)
Yes
—

RPF

Relays with clamp fixing



2 N/O / 30 A (3)
2 C/O / 30 A (3)

24...240 V
12...125 V

Flat (Faston type)

Up to 250 V

50 000
5 000 000

—



16 A

Mixed

Connector

Yes

Yes (for 3 and 4-pole)

Yes (on socket RPZ F1)

Yes

Yes

Yes

RPZ F•

—

—

—

—

—

—

—


20

20

28

—

(3) 30 A when mounted with 13 mm gap between two relays and 25 A when mounted side by side without a gap.

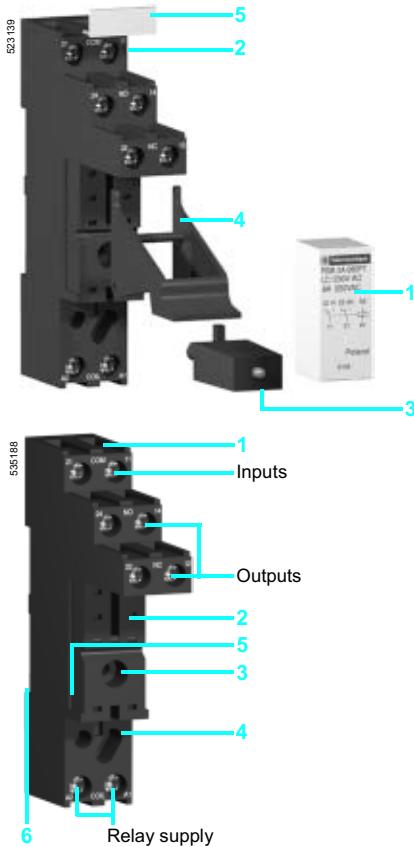

Presentation of the range

The RSB interface relay range comprises:

- 1 12 A relays with 1 C/O contact , 16 A relays with 1 C/O contact and 8 A relays with 2 C/O contacts.
- 2 Sockets with separate contact terminals.
- 3 Protection modules (diode, diode + LED, RC circuit or varistor + LED). All these modules are common to all sockets.
- 4 A plastic maintaining clamp for all sockets.
- 5 Clip-in legends for the sockets.

Socket description

Sockets with separate contact terminals (1)

- 1 Connection by connector.
- 2 Five or eight female contacts for the relay pins.
- 3 A fixing hole for panel mounting.
- 4 Location for protection modules.
- 5 Locking components for plastic maintaining clamp.
- 6 Locating slot for mounting on U rail.

(1) The inputs and outputs are separate from the relay supply.

General characteristics

Conforming to standards	IEC/EN 61810-1, UL 508, CSA C22-2 n° 14		
Product certifications	UL, CSA		
Ambient air temperature around the device	Storage	°C	- 40...+ 85
	Operation	°C	— - 40...+ 85, ~ - 40...+ 70
Vibration resistance	Conforming to IEC/EN 60068-2-6		
Degree of protection	Conforming to IEC/EN 60529		
Shock resistance conforming to IEC/EN 60068-2-27	Opening	gn	5 gn
	Closing	gn	10 gn
Protection category	RT I		
Mounting position	Any		

Insulation characteristics


Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	400
Rated impulse withstand voltage (Uimp)		kV	3.6 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	5000
	Between poles	~ V	2500
	Between contacts	~ V	1000


Contact characteristics


Relay type	RSB 1A120●●	RSB 1A160●●	RSB 2A080●●
Number and type of contacts	1 C/O	1 C/O	2 C/O
Contact materials	AgNi		
Conventional thermal current (Ith)	For ambient temperature <= 40°C		
Rated operational current in utilisation categories AC-1 and DC-1	Conforming to IEC N/O N/C	A 12 A 6	16 8
Maximum operating rate in operating cycles/hour	No-load Under load	72 000 600	
Switching voltage	Maximum	V ~ 400, — 300	
Switching capacity	Minimum Maximum	mA 5 VA 3000	4000 2000

Contact characteristics (continued)

Relay type	RSB 1A120●●	RSB 1A160●●	RSB 2A080●●
Mechanical durability	In millions of operating cycles ≥ 30		
Electrical durability	Resistive load 12 A - 250 V: ≥ 0.1	16 A - 250 V: ≥ 0.07	8 A - 250 V: ≥ 0.1
In millions of operating cycles/hour	Inductive load See curves below		
Electrical durability of contacts	Reduction coefficient for inductive load ∼ (depending on power factor cos φ)	Maximum switching capacity on resistive load	---
Resistive load ∼			







A RSB 2A080●● B RSB 1A160●● C RSB 1A120●●

Durability (inductive load) = durability (resistive load) × reduction coefficient.

Coil characteristics

Average consumption	--- 0.45 W, ~ 0.75 VA											
Drop-out voltage threshold	≥ --- 0.1 Uc, ≥ ~ 0.15 Uc											
Operating time (response time)	Between coil energisation and making of the On-delay contact	~ ms	About 12									
	Between coil de-energisation and making of the Off-delay contact	~ ms	About 9									
Between coil de-energisation and making of the Off-delay contact	~ ms	About 10										
Between coil de-energisation and making of the Off-delay contact	~ ms	About 4										
Control circuit voltage Uc	V	6	12	24	48	60	110	120	220	230	240	
Relay control voltage codes	RD	JD	BD	ED	ND	FD	—	—	—	—	—	
DC	Average resistance at 20 °C ± 10%	Ω	90	360	1440	5700	7500	25 200	—	—	—	
	Operating voltage limits	Min.	V	4.8	9.6	19.2	38.4	48	88	—	—	
		Max.	V	6.6	13.2	26.4	52.8	66	121	—	—	
Relay control voltage codes	—	—	B7	E7	—	—	F7	M7	P7	U7	—	
AC	Average resistance at 20 °C ± 15%	Ω	—	—	400	1550	—	—	10 200	35 500	38 500	
50/60 Hz	Operating voltage limits	Min.	50 Hz	V	—	19.2	38.4	—	96	176	184	
		60 Hz	—	—	20.4	40.8	—	—	102	187	195.5	
		Max.	50/60 Hz	V	—	—	26.4	57.6	—	—	144	
							—	144	264	276	288	

Socket characteristics

Socket type	RSZ E1S35M	RSZ E1S48M
Relay types used	RSB 1A120●●	RSB 2A080●● RSB 1A160●● (1)
Product certifications	UL, CSA	
Conventional thermal current (Ith)	A	12
Degree of protection	Conforming to IEC/EN 60529	IP 20
Connection	Solid cable without cable end	mm ² 1 conductor: 0.5...2.5 mm ² (AWG 20...AWG 12) 2 conductors: 0.5...1.5 mm ² (AWG 20...AWG 14)
	Flexible cable with cable end	mm ² 1 conductor: 0.2...2.5 mm ² (AWG 24...AWG 14) 2 conductors: 0.2...1.5 mm ² (AWG 24...AWG 16)
Maximum tightening torque	Nm	0.6 (M3 screw)
Contact terminal arrangement		Separate

(1) When using the relay with socket RSZ E1S48M, terminals must be linked. See connection schemes on page 7.

RSB 1A120JD + RZM 031FPD
+ RSZ E1S35M**Relays for standard applications**

Control circuit voltage	Sold in lots of	Number and type of contacts - Thermal current (I _{th})			
		1 C/O -12 A	1 C/O -16 A	2 C/O -8 A	Weight kg
V	Unit reference (1)	Unit reference (1)	Unit reference (1)	Unit reference (1)	
--- 6	10	RSB 1A120RD	RSB 1A160RD	RSB 2A080RD	0.014
--- 12	10	RSB 1A120JD	RSB 1A160JD	RSB 2A080JD	0.014
--- 24	10	RSB 1A120BD	RSB 1A160BD	RSB 2A080BD	0.014
--- 48	10	RSB 1A120ED	RSB 1A160ED	RSB 2A080ED	0.014
--- 60	10	RSB 1A120ND	RSB 1A160ND	RSB 2A080ND	0.014
--- 110	10	RSB 1A120FD	RSB 1A160FD	RSB 2A080FD	0.014



RSB 1A160BD + RSZ E1S48M

~ 24	10	RSB 1A120B7	RSB 1A160B7	RSB 2A080B7	0.014
~ 48	10	RSB 1A120E7	RSB 1A160E7	RSB 2A080E7	0.014
~ 120	10	RSB 1A120F7	RSB 1A160F7	RSB 2A080F7	0.014
~ 220	10	RSB 1A120M7	RSB 1A160M7	RSB 2A080M7	0.014
~ 230	10	RSB 1A120P7	RSB 1A160P7	RSB 2A080P7	0.014
~ 240	10	RSB 1A120U7	RSB 1A160U7	RSB 2A080U7	0.014

Sockets - 12 A, ~ 300 V

Contact terminal arrangement	Connection	Relay type	Sold in lots of	Unit reference	Weight kg
Separate	Connector	RSB 1A120●●	10	RSZ E1S35M	0.060
		RSB 1A160●●(2)	10	RSZ E1S48M	0.050
		RSB 2A080●●			

Protection modules

Description	For use with	Voltage	Sold in lots of	Unit reference	Weight
		V			kg
Diode	All sockets	--- 6...230	20	RZM 040W	0.003
RC circuit	All sockets	~ 24...60	10	RZM 041BN7	0.010
		~ 110...240	10	RZM 041FU7	0.010
Diode + green LED	All sockets	--- 6...24	10	RZM 031RB	0.004
		--- 24...60	10	RZM 031BN	0.004
		--- 110...230	10	RZM 031FPD	0.004
Varistor + green LED	All sockets	--- or ~ 6...24	10	RZM 021RB	0.005
		--- or ~ 24...60	10	RZM 021BN	0.005
		--- or ~ 110...230	10	RZM 021FP	0.005

Accessories


Description	For use with	Sold in lots of	Unit reference	Weight kg
Plastic maintaining clamp	All sockets	10	RSZ R215	0.002
Legend	All sockets	10	RSZ L300	0.001

(1) To order a relay complete with socket (sold in lots of 20): add suffix **S** to the references selected above.

Example: RSB 2A080RD + RSZ E1S48M becomes RSB 2A080RDS.

(2) When using the relay with socket RSZ E1S48M, terminals must be linked. See connection schemes on page 7.

RSZ R215





Dimensions

Interface relays

RSB 1A120●●



RSB 2A080●●, RSB 1A160●●

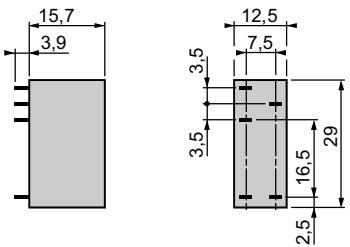

Sockets

RSZ E1S35M

RSZ E1S48M

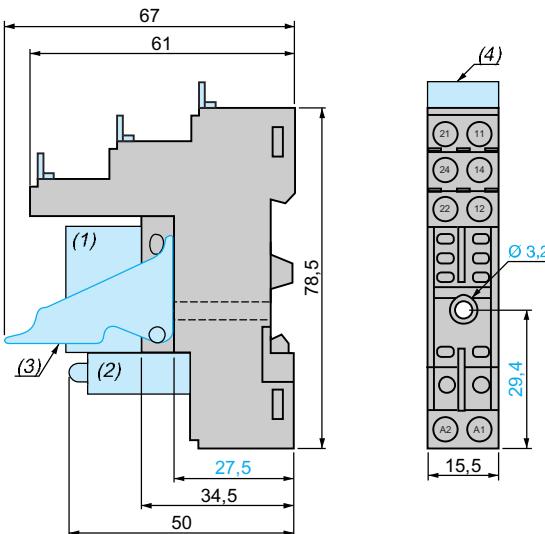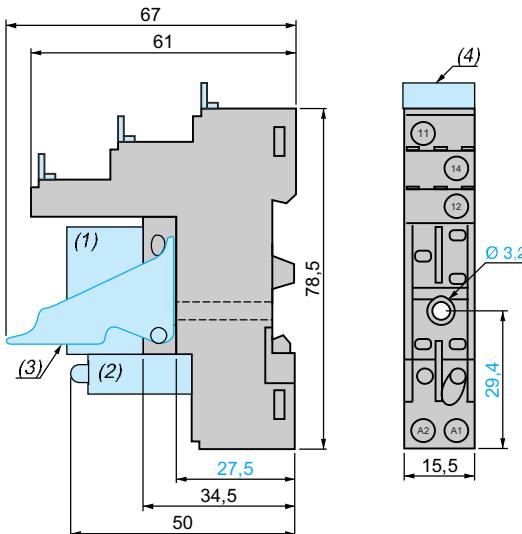

- (1) Relays
- (2) Add-on protection module
- (3) Maintaining clamp
- (4) Legend




Schemes

Interface relays


RSB 1A120●●

RSB 1A160●●

RSB 2A080●●

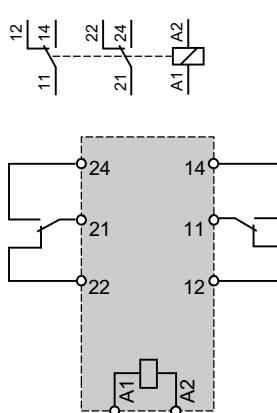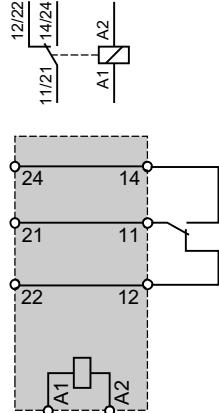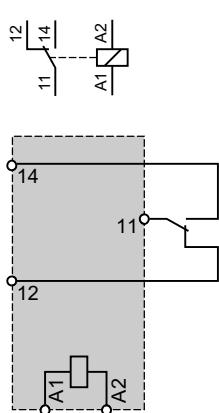



When using relay RSB 1A160●● with socket
RSZ E1S48M: terminals 11 and 21, 14 and 24,
12 and 22 must be linked

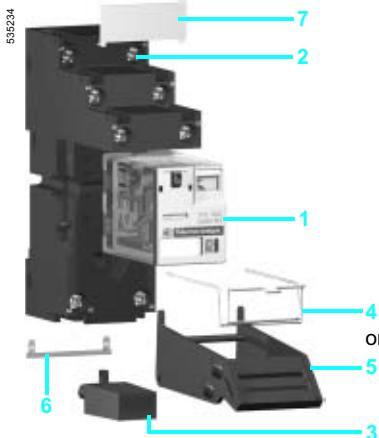

Presentation of the range


The RXM miniature relay range comprises:

- 1 12 A relays with 2 C/O contacts, 10 A relays with 3 C/O contacts, 6 A relays with 4 C/O contacts and 3 A "low level" relays with 4 C/O contacts. All these relays have the same dimensions.
- 2 Sockets with mixed or separate contact terminals.
- 3 Protection modules (diode, RC circuit or varistor). All these modules are common to all sockets.
- 4 A metal maintaining clamp for all sockets.
- 5 A plastic maintaining clamp for all sockets.
- 6 A 2-pole bus jumper that can be used on sockets with separate contact terminals in order to simplify cabling when creating an equipotential link between the coil terminals.
- 7 Clip-in legends for all the sockets except RXZ E2M114.

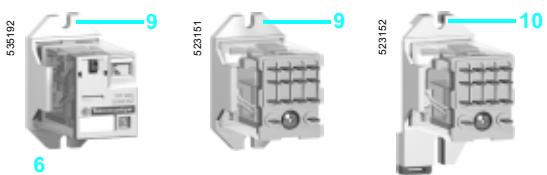

Relay description


- 1 Spring return pushbutton for testing the contacts (green: —, red: ~).
- 2 Mechanical "relay status" indicator.
- 3 Removable lock-down door enabling forced maintaining of the contacts for test or maintenance purposes. During operation, this lock-down door must always be in the closed position.
- 4 LED (depending on version) indicating the relay status.
- 5 Removable legend for relay identification.
- 6 Four notches for rail mounting adapter or panel mounting adapter with fixing lugs.
- 7 Eight, eleven or fourteen Faston type pins.
- 8 Area by which the product can be easily gripped.
- 9 Mounting adapter enabling direct mounting of the relay on a panel.
- 10 Mounting adapter enabling direct mounting of the relay on a U rail.

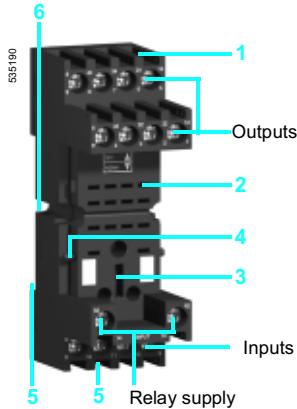

Socket description

Sockets with mixed contact terminals (1)

- 1 Connection by screw clamp terminals or connector.
- 2 Fourteen female contacts for the relay pins.
- 3 Location for protection modules.
- 4 Locking components for plastic and metal maintaining clamps.
- 5 Locating slot for mounting on U rail with fixing clip.
- 6 Two or four fixing holes for panel mounting.

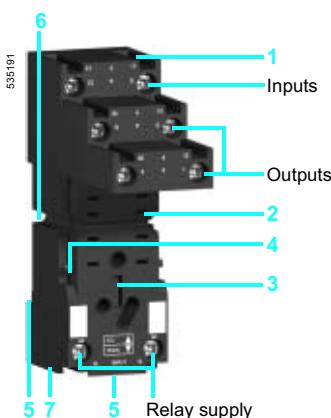

Sockets with separate contact terminals (2)

- 1 Connection by connector.
- 2 Eight, eleven or fourteen female contacts for the relay pins.
- 3 Location for protection modules.
- 4 Locking components for plastic and metal maintaining clamps.
- 5 Locating slot for mounting on U rail with fixing clip.
- 6 Two fixing holes for panel mounting.
- 7 Location for bus jumpers (see mounting on sockets on page 14).

(1) The inputs are mixed with the relay's supply terminals, with the outputs being located on the opposite side of the socket.

(2) The inputs and outputs are separated from the relay supply terminals.

General characteristics

Conforming to standards	IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n° 14		
Product certifications	UL, CSA pending		
Ambient air temperature around the device	Storage °C	- 40... + 85	
	Operation °C	- 40... + 55	
Vibration resistance	Conforming to IEC/EN 60068-2-6		
Degree of protection	Conforming to IEC/EN 60529		
Shock resistance	Opening	10 gn	
conforming to IEC/EN 60068-2-27	Closing	5 gn	
Protection category	RT I		
Mounting position	Any		


Insulation characteristics

Rated insulation voltage (Ui)	V	250 (IEC), 300 (UL, CSA)
Rated impulse withstand voltage (Uimp)	kV	3.6 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V 2500
	Between poles	~ V 2500
	Between contacts	~ V 1500


Contact characteristics

Relay type	RXM 2AB***	RXM 3AB***	RXM 4AB***	RXM 4GB***	
Number and type of contacts	2 C/O	3 C/O	4 C/O	4 C/O	
Contact materials	AgNi			AgAu	
Conventional thermal current (Ith)	For ambient temperature ≤ 55 °C	A 12	10	6	3
Rated operational current in utilisation categories AC-1 and DC-1	Conforming to IEC N/O	12	10	6	2
	N/C	6	5	3	1
	Conforming to UL	12	10	6	3
Maximum operating rate	No-load	18 000			
In operating cycles/hour	Under load	1200			
Switching voltage	Maximum	V ~/_≤ 250			
Switching capacity	Minimum	mA 10 mA on 17 V		2 mA on 5 V	
	Maximum	VA 3000	2500	1500	1500
Utilisation coefficient		20 %			
Mechanical durability	In millions of operating cycles	10			
Electrical durability	Resistive load	0.1			
In millions of operating cycles/hour	Inductive load	See curves below			


Electrical durability of contacts
Resistive load ~



Reduction coefficient for inductive load ~ (depending on power factor cos φ)



Maximum switching capacity on resistive load



A RXM 2AB* B RXM 3AB*** C RXM 4AB*** D RXM 4GB*****

Durability (inductive load) = durability (resistive load) x reduction coefficient.

Characteristics (continued), substitution

Zelio Relay - plug-in relays RXM miniature relays

Coil characteristics

Average consumption	~	VA	1.2									
	---	W	0.9									
Drop-out voltage threshold	~		≥ 0.15 Uc									
	---		≥ 0.1 Uc									
Operating time (response time)	Between coil energisation and making of the On-delay contact	~	ms	20								
		---	ms	20								
	Between coil de-energisation and making of the Off-delay contact	~	ms	20								
		---	ms	20								
Control circuit voltage Uc	V	12	24	48	110	120	125	220	230	240		
Relay control voltage codes	JD	BD	ED	FD	-	GD	MD	-	-	-		
DC	Average resistance at 20 °C ± 10%	Ω	160	650	2600	11 000	-	11 000	14 000	-		
	Operating voltage limits	Min.	V	9.6	19.2	38.4	88	-	100	176	-	
		Max.	V	13.2	26.4	52.8	121	-	138	242	-	
Relay control voltage codes	-	B7	E7		F7	-	M7	P7	U7			
AC	Average resistance at 20 °C ± 15%	Ω	-	180	770	-	4430	-	15 000	15 000	15 500	
	Operating voltage limits	Min.	V	-	19.2	38.4	-	96	-	176	184	192
		Max.	V	-	26.4	52.8	-	132	-	242	253	264

Socket characteristics

Socket type	RXZ E2S108M	RXZ E2S111M	RXZ E2S114M	RXZ E2M114	RXZ E2M114M
Relay types used	RXM 2●●●●	RXM 3●●●●	RXM 4●●●●	RXM 2●●●●(1)	RXM 2●●●●(1)
Product certifications	UL, CSA (pending)				
Conventional thermal current (Ith)	A	12	10		
Degree of protection	Conforming to IEC/EN 60529	IP 20			
Connection	Solid cable without cable end	mm ²	1 conductor: 0.5...2.5 mm ² (AWG 20...AWG 12) 2 conductors: 0.5...1.5 mm ² (AWG 20...AWG 14)		
	Flexible cable with cable end	mm ²	1 conductor: 0.2...2.5 mm ² (AWG 24...AWG 14) 2 conductors: 0.2...1.5 mm ² (AWG 24...AWG 16)		
Maximum tightening torque	Nm	0.6 (M3 screw)			
Contact terminal arrangement		Separate		Mixed	
Bus jumper Ith: 5 A		Yes		No	

(1) When mounting relay RXM 2●●●● on socket RXZ E2M●●●●, the thermal current must not exceed 10 A.

Substitution table

Old ranges	New range	
RXN	RXL	RXM
Miniature relays		
RXN 21E1●●●	RXL 2A12B●●●	RXM 2AB●●●
-	RXL 3A10B●●●	RXM 3AB●●●
RXN 41G1●●●	RXL 4A06B●●●	RXM 4AB●●●
-	RXL 4G06B●●●	RXM 4GB●●●
RXN 41G1●●●TQ	RXL 2A12B●●●TQ	RXM 2AB●●●TQ
RXN 21E1●●●TQ	RXL 4A06B●●●TQ	RXM 4AB●●●TQ
Sockets		
RXZ E1M114	RXZ E1M114	RXZ E2M114
RXZ 7G	RXZ 7G	RXZ E2M114M
RXZ E1M114M	RXZ E1M114M	RXZ E2M114M
RXZ E1●●●●M	RXZ E1●●●●M	RXZ E2●●●●M
Protection modules		
RXM 040MD	RXM 040MD	RXM 040W
RZM 040W	RZM 040W	RXM 040W
RZM 031●●	RZM 031●●	RXM 040W (2)
RZM 041●●7	RZM 041●●7	RXM 041●●7
RZM 021●●	RZM 021●●	RXM 021●● (2)
Accessories		
RXZ 200	RXZ 200	RXZ 400
RXZ R235	RXZ R235	RXZ R335
RXZ L320	RXZ L320	RXZ L420

(2) △ Protection module without LED.

535169



RXM 2AB2F7

535169



RXM 4GB2F7

Miniature relays without LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts - Thermal current (Ith)			4 C/O - 6 A
	2 C/O -12 A	3 C/O - 10 A	Unit reference	
V	kg	kg		kg
... 12	RXM 2AB1JD	0.037	RXM 3AB1JD	0.038
... 24	RXM 2AB1BD	0.037	RXM 3AB1BD	0.038
... 48	RXM 2AB1ED	0.037	RXM 3AB1ED	0.038
... 110	RXM 2AB1FD	0.037	RXM 3AB1FD	0.038
... 220	-	-	-	RXM 4AB1MD
~ 24	RXM 2AB1B7	0.037	RXM 3AB1B7	0.038
~ 48	RXM 2AB1E7	0.037	RXM 3AB1E7	0.038
~ 120	RXM 2AB1F7	0.037	RXM 3AB1F7	0.038
~ 230	RXM 2AB1P7	0.037	RXM 3AB1P7	0.038
~ 240	-	-	-	RXM 4AB1U7

Miniature relays with LED (sold in lots of 10)

... 12	RXM 2AB2JD	0.037	RXM 3AB2JD	0.038	RXM 4AB2JD	0.036
... 24	RXM 2AB2BD	0.037	RXM 3AB2BD	0.038	RXM 4AB2BD	0.036
... 48	RXM 2AB2ED	0.037	RXM 3AB2ED	0.038	RXM 4AB2ED	0.036
... 110	RXM 2AB2FD	0.037	RXM 3AB2FD	0.038	RXM 4AB2FD	0.036
... 125	-	-	-	-	RXM 4AB2GD	0.036
~ 24	RXM 2AB2B7	0.037	RXM 3AB2B7	0.038	RXM 4AB2B7	0.036
~ 48	RXM 2AB2E7	0.037	RXM 3AB2E7	0.038	RXM 4AB2E7	0.036
~ 120	RXM 2AB2F7	0.037	RXM 3AB2F7	0.038	RXM 4AB2F7	0.036
~ 230	RXM 2AB2P7	0.037	RXM 3AB2P7	0.038	RXM 4AB2P7	0.036

Miniature relays with low level contacts, without LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts Thermal current (Ith)			4 C/O - 3 A
	Unit reference	Weight	kg	
V				kg
... 12	RXM 4GB1JD	0.036		
... 24	RXM 4GB1BD	0.036		
... 48	RXM 4GB1ED	0.036		
... 110	RXM 4GB1FD	0.036		
~ 24	RXM 4GB1B7	0.036		
~ 48	RXM 4GB1E7	0.036		
~ 120	RXM 4GB1F7	0.036		
~ 230	RXM 4GB1P7	0.036		

Miniature relays with low level contacts, with LED (sold in lots of 10)

... 12	RXM 4GB2JD	0.036
... 24	RXM 4GB2BD	0.036
... 48	RXM 4GB2ED	0.036
... 110	RXM 4GB2FD	0.036
~ 24	RXM 4GB2B7	0.036
~ 48	RXM 4GB2E7	0.036
~ 120	RXM 4GB2F7	0.036
~ 230	RXM 4GB2P7	0.036
~ 240	RXM 4GB2U7	0.036

535235



RXZ E2M114M
+
Relay RXM 4AB2P7TQ

535211



RXZ E2S114M
+
Relay RXM 4AB2F7

535212



RXM 041●●7

535195



RE XL4●●

535215



RXZ 400

Miniature relays without LED (sold in lots of 100)

Control circuit voltage	Number and type of contacts - Thermal current (I _{th})		4 C/O - 6 A	
	Unit reference	Weight		
V	kg		kg	
— 12	—	—	RXM 4AB1JDTQ	0.036
— 24	RXM 2AB1BDTQ	0.037	RXM 4AB1BDTQ	0.036
— 48	—	—	RXM 4AB1EDTQ	0.036
— 110	—	—	RXM 4AB1FDTQ	0.036
— 220	—	—	RXM 4AB1MDTQ	0.036
~ 24	RXM 2AB1B7TQ	0.037	RXM 4AB1B7TQ	0.036
~ 48	—	—	RXM 4AB1E7TQ	0.036
~ 120	RXM 2AB1F7TQ	0.037	RXM 4AB1F7TQ	0.036
~ 230	RXM 2AB1P7TQ	0.037	RXM 4AB1P7TQ	0.036

Miniature relays with LED (sold in lots of 100)

— 24	—	—	RXM 4AB2BDTQ	0.036
~ 24	RXM 2AB2B7TQ	0.037	RXM 4AB2B7TQ	0.036
~ 230	RXM 2AB2P7TQ	0.037	RXM 4AB2P7TQ	0.036

Sockets

Contact terminal arrangement	Connection	Relay type	Sold in lots of	Unit reference	Weight kg
Mixed	Screw clamp terminals	RXM 2●●●●(3) RXM 4●●●●	10	RXZ E2M114 (1)	0.048
	Connector	RXM 2●●●●(3) RXM 4●●●●	10	RXZ E2M114M (1)	0.056
Separate	Connector	RXM 2●●●●	10	RXZ E2S108M (2)	0.058
		RXM 3●●●●	10	RXZ E2S111M (1)	0.066
		RXM 4●●●●	10	RXZ E2S114M (1)	0.070

Protection modules

Description	Voltage	For use with	Sold in lots of	Unit reference	Weight kg
Diode	— 6...250	All sockets	20	RXM 040W	0.003
RC circuit	~ 24...60	All sockets	20	RXM 041BN7	0.010
	~ 110...240	All sockets	20	RXM 041FU7	0.010
Varistor	~ 6...24	All sockets	20	RXM 021RB	0.030
	~ 24...60	All sockets	20	RXM 021BN	0.030
	~ 110...240	All sockets	20	RXM 021FP	0.030

Timing relays

Description	For use with	Unit reference	Weight kg
2 or 4 timed C/O contacts (function A)	Sockets RXZ E●●●●●	RE XL2●● (4) RE XL4●● (4)	— —

Accessories

Description	For use with	Sold in lots of	Unit reference	Weight kg
Metal maintaining clamp	All sockets	10	RXZ 400	0.001
Plastic maintaining clamp	All sockets	10	RXZ R335	0.005
Bus jumper, 2-pole (I _{th} : 5 A)	All sockets with separate contacts	10	RXZ S2	0.005
Mounting adapter for L-shaped rails (5)	All relays	10	RXZ E2DA	0.004
Mounting adapter with fixing lugs for panel	All relays	10	RXZ E2FA	0.002
Clip-in legends	All relays (sheet of 108 legends)	10	RXZ L520	0.080
	All sockets except RXZ E2M114	10	RXZ L420	0.001

(1) Thermal current I_{th}: 10 A(2) Thermal current I_{th}: 12 A

(3) When mounting relay RXM 2●●●●● on socket RXZ E2M●●●●●, the thermal current must not exceed 10 A.

(4) Please consult the "Zelio Time timing relays" catalogue.


(5) Test button becomes inaccessible.

Zelio Relay - plug-in relays

RXM miniature relays

Dimensions



Miniature relays

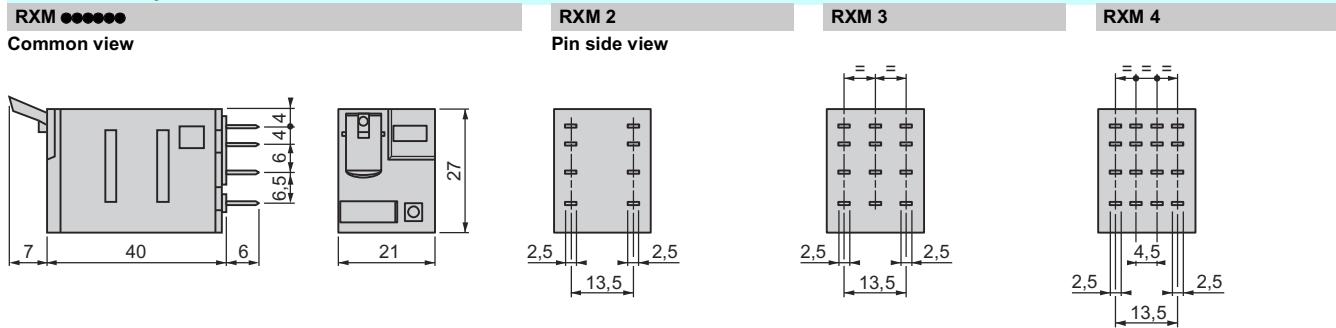

Sockets

RXZ E2M114

RXZ E2M114M

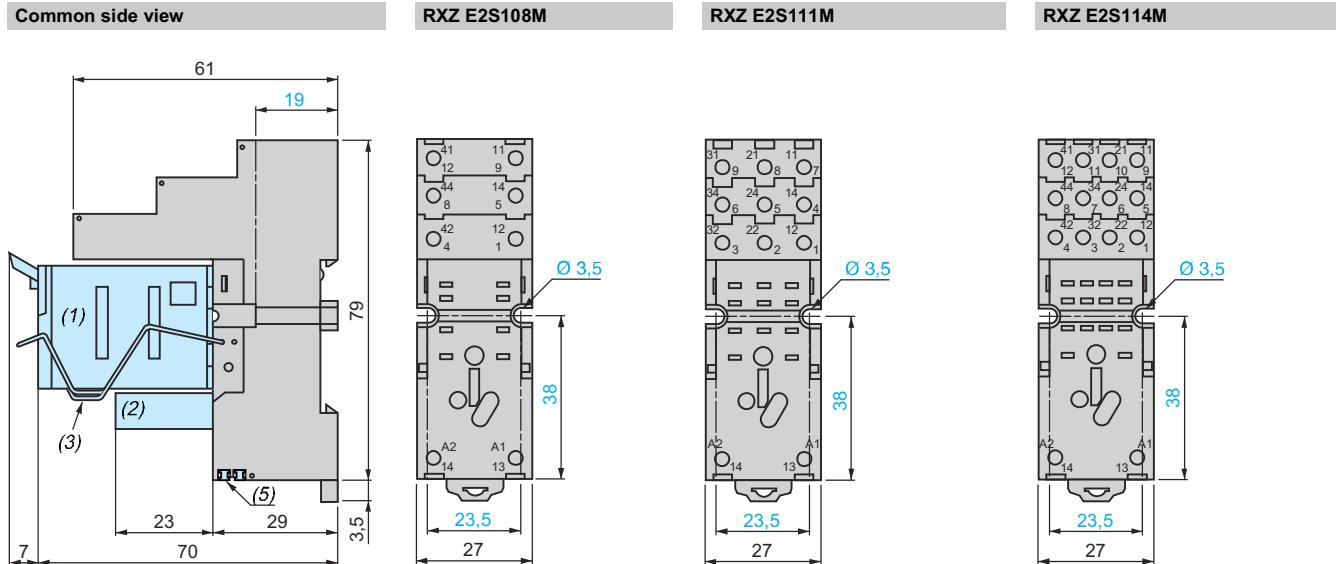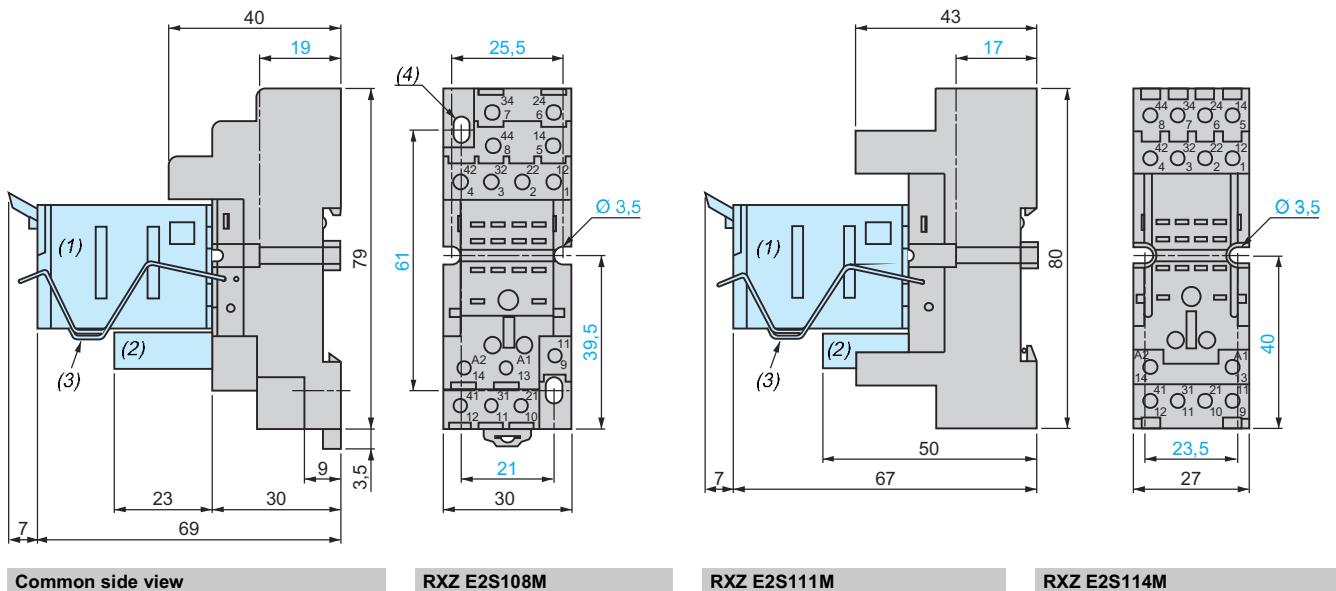

(1) Relays

(2) Add-on protection module

(3) Maintaining clamp


(4) 2 elongated holes Ø 3.5 x 6.5

(5) 2 bus jumpers

Dimensions (continued)

Plastic clamp and clip-in legends


RXZ R335



RXZ L420




Mounting on all sockets (1)

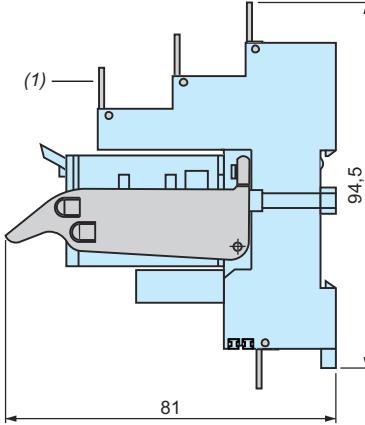

(1) Clip-in legends for all sockets except RXZ E2M114.


Bus jumper

RXZ S2




Mounting on sockets with separate contacts
(view from below)

Example of bus jumper mounting on sockets

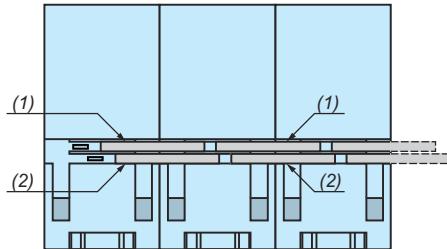

Metal clamp


RXZ 400



(1) 2 bus jumpers (polarity A2)
(2) 2 bus jumpers (polarity A1)



Mounting adapter for rail (1)

RXZ E2DA

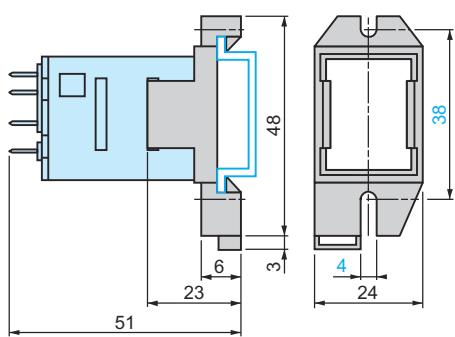

Mounting adapter for panel


RXZ E2FA

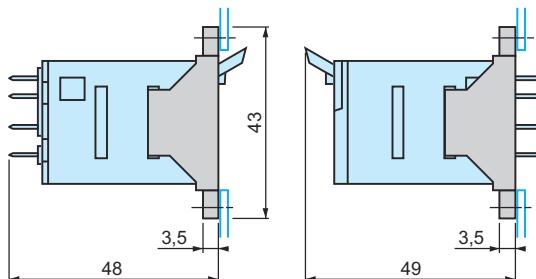


(1) Test button becomes inaccessible

Schemes**Miniature relays**





RXM 2●●●●




RXM 3●●●●●



RXM 4●●●●●




Symbols shown in blue correspond to Nema marking.

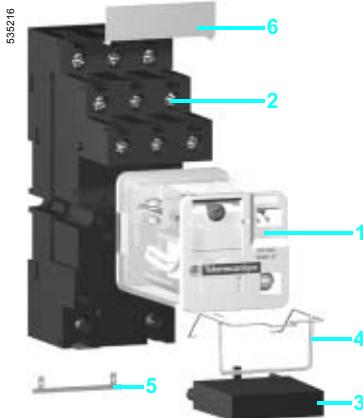

Presentation of the range


The RUM universal relay range comprises:

- 1 10 A relays with 2 and 3 C/O contacts, with cylindrical or flat (Faston type) pins, and 3 A "low level" relays with 3 C/O contacts, with cylindrical pins. All these relays have the same dimensions.
- 2 Sockets with mixed or separate contact terminals.
- 3 Protection modules (diode, RC circuit or varistor) or 1 timer module. All these modules are common to all sockets.
- 4 A metal maintaining clamp for all sockets.
- 5 A 2-pole bus jumper that can be used on sockets with separate contact terminals in order to simplify cabling when creating an equipotential link between the coil terminals.
- 6 Clip-in legends for the sockets.



Relay description


- 1 Spring return pushbutton for testing the contacts (green: $\perp\!\!\!\perp$, red: \sim).
- 2 Mechanical "relay status" indicator.
- 3 Removable lock-down door enabling forced maintaining of the contacts for test or maintenance purposes. During operation, this lock-down door must always be in the closed position.
- 4 LED (depending on version) indicating the relay status.
- 5 Removable legend for relay identification.
- 6 Eight or eleven cylindrical or flat (Faston type) pins.
- 7 Area by which the product can be easily gripped.

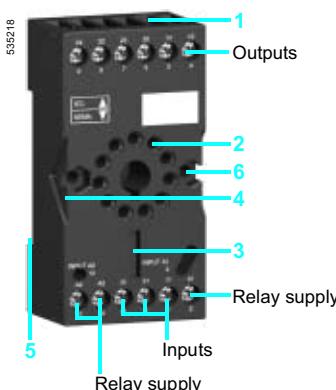

Socket description

Sockets with mixed contact terminals (1)

- 1 Connection by connector.
- 2 Eight or eleven female contacts for the relay cylindrical pins.
- 3 Location for protection modules or the timer module.
- 4 Locking component for metal maintaining clamp.
- 5 Locating slot for \square rail mounting.
- 6 Two fixing holes for panel mounting.

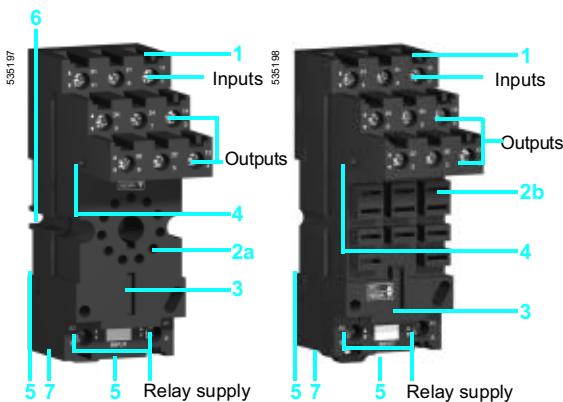

Sockets with separate contact terminals (2)

- 1 Connection by connector.
- 2 a Eight or eleven female contacts for the relay cylindrical pins.
- 2 b Eleven female contacts for the relay flat pins.
- 3 Location for protection modules or the timer module.
- 4 Locking component for metal maintaining clamp.
- 5 Locating slot for mounting on \square rail with fixing clip.
- 6 Two fixing holes for panel mounting.
- 7 Location for bus jumpers (see mounting on sockets on page 22).

(1) The inputs are mixed with the relay's supply terminals, with the outputs being located on the opposite side of the socket.

(2) The inputs and outputs are separated from the relay supply terminals.

General characteristics

Conforming to standards	IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n° 14		
Product certifications	UL, CSA (pending)		
Ambient air temperature around the device	Storage °C	- 40... + 85	
	Operation °C	- 40... + 55	
Vibration resistance	Conforming to IEC/EN 60068-2-6	4 gn (10...50 Hz)	
Degree of protection	Conforming to IEC/EN 60529	IP 40	
Shock resistance	Opening conforming to IEC/EN 60068-2-27	10 gn	
	Closing	5 gn	
Protection category		RT I	
Mounting position		Any	




Insulation characteristics

Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	250 (IEC), 300 (UL, CSA)
Rated impulse withstand voltage (Ump)		kV	3.6 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	2500
	Between poles	~ V	2500
	Between contacts	~ V	1500

Contact characteristics

Relay type	RUM F2●●●	RUM F3●●●	RUM C2●●●	RUM C3A●●	RUM C3G●●
Number and type of contacts	2 C/O	3 C/O	2 C/O	3 C/O	3 C/O
Contact materials	. AgNi				AgAu
Conventional thermal current (Ith)	For ambient temperature ≤ 55°C	A	10		3
Rated operational current in utilisation categories AC-1 and DC-1	Conforming to IEC	N/O	A	10	2
		N/C	A	5	1
	Conforming to UL	A	10		3
Maximum operating rate	No-load	36 000			
In operating cycles/hour	Under load	3600			
Switching voltage	Maximum	V	~ 250		
Switching capacity	Minimum	mA	10 mA on 17 V		3 mA on 5 V
	Maximum	VA	2500		750
Utilisation coefficient		20 %			
Mechanical durability	In millions of operating cycles	5			
Electrical durability	Resistive load	0.1			
In millions of operating cycles/hour	Inductive load	See curves below			

Electrical durability of contacts
Resistive load ~ Reduction coefficient for inductive load ~ (depending on power factor cos φ) Maximum switching capacity on resistive load ---



A RUM F2●●●, RUM C2●●●, RUM C3A●● ● B RUM C3G●●

Durability (inductive load) = durability (resistive load) x reduction coefficient.

Coil characteristics

Average consumption	~	VA	2..3									
	---	W	1.4									
Drop-out voltage threshold	~		≥ 0.15 Uc									
	---		≥ 0.1 Uc									
Operating time (response time)	Between coil energisation and making of the On-delay contact	~	ms	20								
		---	ms	20								
	Between coil de-energisation and making of the Off-delay contact	~	ms	20								
		---	ms	20								
Control circuit voltage Uc	V	12	24	48	60	110	120	125	220	230		
Relay control voltage codes		JD	BD	ED	ND	FD	-	GD	MD	-		
DC	Average resistance at 20 °C ± 10%	Ω	120	470	1800	2790	10 000	-	10 000	3700		
	Operating voltage limits	Min.	V	9.6	19.2	38.4	48	88	-	100	176	
		Max.	V	13.2	26.4	52.8	66	121	-	137.5	242	
Relay control voltage codes		-	B7	E7	-	-	F7	-	-	P7		
AC	Average resistance at 20 °C ± 15%	Ω	-	72	290	-	-	1700	-	-	7200	
	Operating voltage limits	Min.	V	-	19.2	38.4	-	-	96	-	-	184
		Max.	V	-	26.4	52.8	-	-	132	-	-	253

Socket characteristics

Socket type		RUZ C2M	RUZ C3M	RUZ SC2M	RUZ SC3M	RUZ SF3M
Relay types used		RUM C2•••••	RUM C3•••••	RUM C2•••••	RUM C3•••••	RUM F•••••
Product certifications		UL, CSA (pending)				
Conventional thermal current (Ith)	A	12				
Degree of protection	Conforming to IEC/EN 60529		IP 20			
Connection	Solid cable without cable end	mm ²	1 conductor: 0.5...2.5 mm ² (AWG 20...AWG 12) 2 conductors: 0.5...1.5 mm ² (AWG 20...AWG 14)			
	Flexible cable with cable end	mm ²	1 conductor: 0.2...2.5 mm ² (AWG 24...AWG 14) 2 conductors: 0.2...1.5 mm ² (AWG 24...AWG 16)			
Maximum tightening torque	Nm	0.6 (M3 screw)				
Contact terminal arrangement		Mixed		Separate		
Bus jumper Ith: 5 A		No		Yes		

References

Relays for standard applications, without LED (sold in lots of 10)

Pins	Control circuit voltage	Number and type of contacts - Thermal current (Ith)		Unit reference	Weight
		2 C/O -10 A	3 C/O -10 A		
V		kg		kg	
Cylindrical	— 12	RUM C2AB1JD	0.084	RUM C3AB1JD	0.088
	— 24	RUM C2AB1BD	0.084	RUM C3AB1BD	0.088
	— 48	RUM C2AB1ED	0.084	RUM C3AB1ED	0.088
	— 60	—	—	RUM C3AB1ND	0.088
	— 110	RUM C2AB1FD	0.084	RUM C3AB1FD	0.088
	— 125	—	—	RUM C3AB1GD	0.088
	— 220	—	—	RUM C3AB1MD	0.088
	~ 24	RUM C2AB1B7	0.084	RUM C3AB1B7	0.088
	~ 48	RUM C2AB1E7	0.084	RUM C3AB1E7	0.088
	~ 120	RUM C2AB1F7	0.084	RUM C3AB1F7	0.088
Flat (Faston type)	~ 230	RUM C2AB1P7	0.084	RUM C3AB1P7	0.088
	— 12	RUM F2AB1JD	0.080	RUM F3AB1JD	0.084
	— 24	RUM F2AB1BD	0.080	RUM F3AB1BD	0.084
	— 48	RUM F2AB1ED	0.080	RUM F3AB1ED	0.084
	— 110	RUM F2AB1FD	0.080	RUM F3AB1FD	0.084
	~ 24	RUM F2AB1B7	0.080	RUM F3AB1B7	0.084
	~ 48	RUM F2AB1E7	0.080	RUM F3AB1E7	0.084
	~ 120	RUM F2AB1F7	0.080	RUM F3AB1F7	0.084
	~ 230	RUM F2AB1P7	0.080	RUM F3AB1P7	0.084

Relays for standard applications, with LED (sold in lots of 10)

Cylindrical		kg	
— 12	RUM C2AB2JD	0.084	RUM C3AB2JD
— 24	RUM C2AB2BD	0.084	RUM C3AB2BD
— 48	RUM C2AB2ED	0.084	RUM C3AB2ED
— 60	—	—	RUM C3AB2ND
— 110	RUM C2AB2FD	0.084	RUM C3AB2FD
— 125	—	—	RUM C3AB2GD
~ 24	RUM C2AB2B7	0.084	RUM C3AB2B7
~ 48	RUM C2AB2E7	0.084	RUM C3AB2E7
~ 120	RUM C2AB2F7	0.084	RUM C3AB2F7
~ 230	RUM C2AB2P7	0.084	RUM C3AB2P7
Flat (Faston type)		kg	
— 12	RUM F2AB2JD	0.084	RUM F3AB2JD
— 24	RUM F2AB2BD	0.084	RUM F3AB2BD
— 48	RUM F2AB2ED	0.084	RUM F3AB2ED
— 110	RUM F2AB2FD	0.084	RUM F3AB2FD
~ 24	RUM F2AB2B7	0.084	RUM F3AB2B7
~ 48	RUM F2AB2E7	0.084	RUM F3AB2E7
~ 120	RUM F2AB2F7	0.084	RUM F3AB2F7
~ 230	RUM F2AB2P7	0.084	RUM F3AB2P7

Relays with low level contacts, with LED (sold in lots of 10)

Pins	Control circuit voltage	Number and type of contacts Thermal current (Ith)	
		3 C/O - 3 A	Unit reference
V		kg	
Cylindrical	— 24	RUM C3GB2BD	0.086
	— 48	RUM C3GB2ED	0.086
	~ 24	RUM C3GB2B7	0.086
	~ 48	RUM C3GB2E7	0.086
	~ 120	RUM C3GB2F7	0.086
	~ 230	RUM C3GB2P7	0.086

55599



RUM C2AB2B7

555200



RUM C2AB2F7



RUZ C3M + relay RUM C3●●●●●



RUW 241P7



RUW 101MW



RUZ C200



RUZ S2

References (continued)

Sockets

Contact terminal arrangement	Connection	Relay type	Sold in lots of	Unit reference	Weight kg
Mixed	Connector	RUM C2●●●●●	10	RUZ C2M	0.054
		RUM C3●●●●●	10	RUZ C3M	0.054
Separate	Connector	RUM C2●●●●●	10	RUZ SC2M	0.095
		RUM C3●●●●●	10	RUZ SC3M	0.100
		RUM F2●●●●●	10	RUZ SF3M	0.095
		RUM F3●●●●●			

Protection modules

Description	For use with	Voltage	Sold in lots of	Unit reference	Weight kg
Diode	All sockets	= 6...250	10	RUW 240BD	0.004
RC circuit	All sockets	~ 110...240	10	RUW 241P7	0.004
Varistor	All sockets	~ 24 ~ 240	10 10	RUW 242B7 RUW 242P7	0.004 0.004

Timer module

Description	For use with	Voltage	Sold in lots of	Unit reference	Weight kg
Multifunction	All sockets	~ 24...240	10	RUW 101MW	0.020

Timing relays

Description	For use with	Reference	Weight kg
2 timed C/O contacts (single-function or multifunction)	On sockets RUZ CoM	RE 48A ●● (1)	-

Accessories

Description	For use with	Sold in lots of	Unit reference	Weight kg
Metal maintaining clamp	All sockets	10	RUZ C200	0.001
Bus jumper, 2-pole (Ith : 5 A)	All sockets with separate contacts	10	RUZ S2	0.005
Clip-in legends	All relays (sheet of 108 legends)	10	RXZ L520	0.080
	All sockets with separate contacts	10	RUZ L420	0.001

(1) Please consult the "Zelio Time timing relays" catalogue.

Substitution table


Old range	New range
RUN	RUM
Universal relays	
RUN 21C2●●●	RUM F2AB●●●
RUN 31C2●●●	RUM F3AB●●●
RUN 21A2●●●	RUM C2AB●●●
RUN 31A2●●●	RUM C3AB●●●
RUN 33A22●●●	RUM C3GB2●●
Sockets	
RUZ ●A	RUZ C3M
RUZ ●D	RUZ C2M
RUZ 1C	RUZ SF3M
Protection modules	
RUW 030BD	RUW 240BD (2)
RUW 04●●●	RUW 24●●● (2)
Accessories	
RUZ 2●●	RUZ C200

(2) △ Protection module without DEL.

Dimensions**Universal relays**


RUM C••

RUM F••

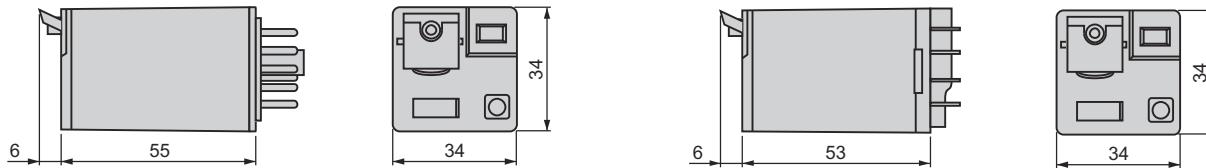**Sockets****Common side view**


RUZ C2M

RUZ C3M

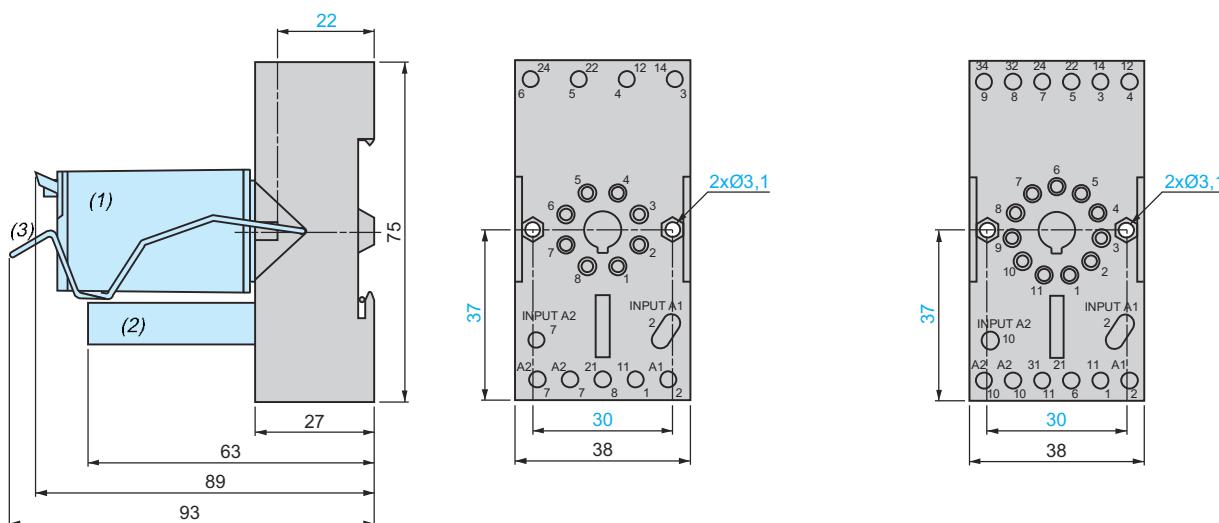

RUZ SC2M

RUZ SC3M

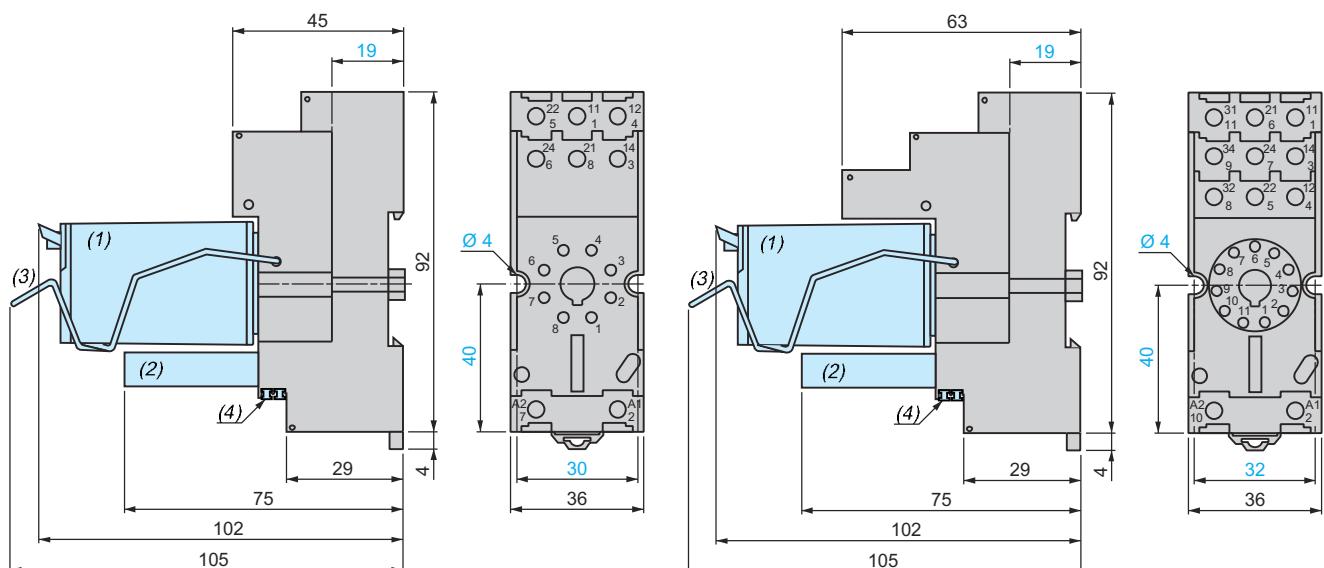

(1) Relay

(2) Protection module

(3) Maintaining clamp

(4) 2 bus jumpers


Dimensions (continued) schemes

Zelio Relay - plug-in relays RUM universal relays

Dimensions (continued)

Sockets (continued)


RUZ SF3M

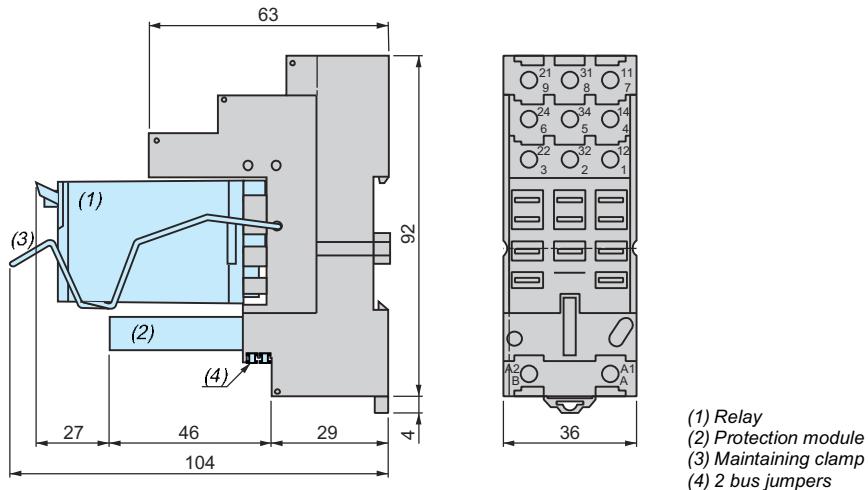

Metal maintaining clamps and plastic legends


RUZ C200

Mounting

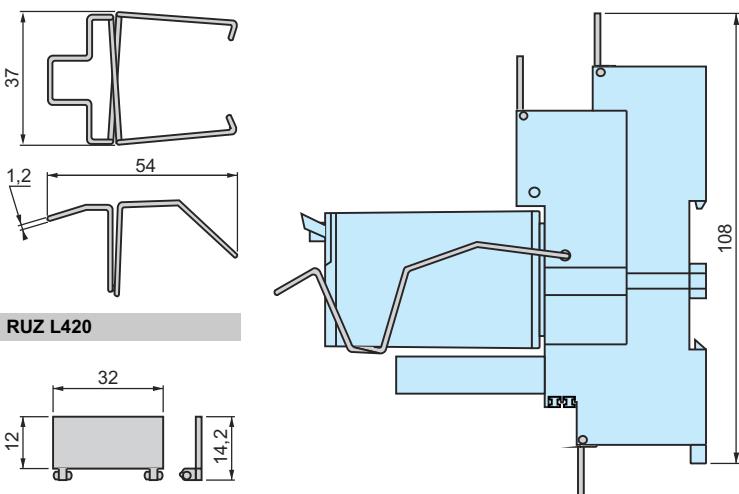


Bus jumper

RUZ S2

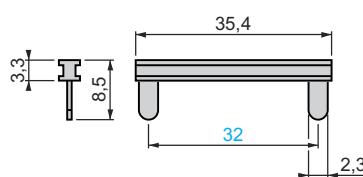

Mounting on sockets with separate contacts (view from below)

Example of bus jumper mounting on sockets

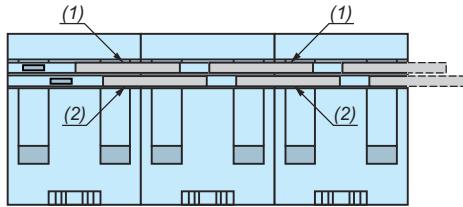


(1) 2 bus jumpers (polarity A2)
(2) 2 bus jumpers (polarity A1)


Schemes

Universal relays


RUM ●2AB●●●




RUM C2AB●●●




RUM F2AB●●●




RUM C3●●●●●



RUM F3AB●●●



RUM F3AB●●●




Symbols shown in blue correspond to Nema marking.

Multifunction timer module RUW 101MW

Programming

Timing range selection

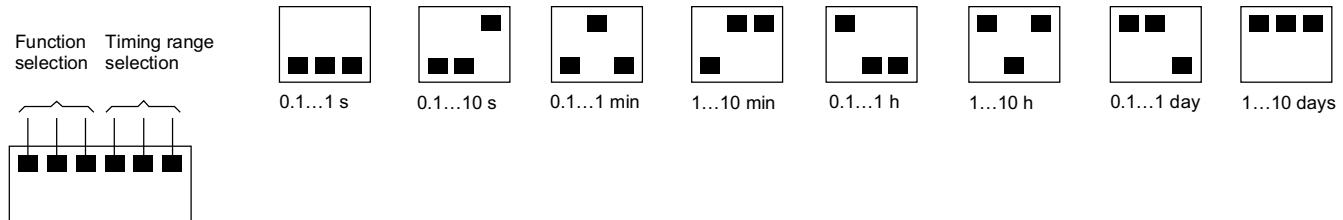

Function selection

Selection	Function	Control	Function diagram	Control scheme
	On-delay timer E	Series control		
	Monostable with maintained control Wu	Series control		
	Flashing relay, starting On-delay phase Bi	Series control		
	Flashing relay, starting Off-delay phase Bp	Series control		
	Off-delay timer R	Control by external contact (S)		
	Monostable with pulse control Ws	Control by external contact (S)		
	Monostable, starting on de-energisation Wa	Control by external contact (S)		
	On-delay timer Es	Control by external contact (S)		

Power off

Contact open

U: voltage

S: external control

Power on

Contact closed

R: relay RUM

t: adjustable time delay




Presentation of the range

The RPM power relay range comprises:



- 1 15 A relays with 1, 2, 3 and 4 C/O contacts.
- 2 Sockets with mixed contact terminals.
- 3 Protection modules (diode, RC circuit or varistor) or 1 timer module. All these modules are common to all the sockets except for the timer module, which can only be used on the 3-pole or 4-pole sockets.

A metal maintaining clamp for 1 contact relays.



Relay description

- 1 Spring return pushbutton for testing the contacts (green: \equiv , red: \sim).
- 2 Mechanical "relay status" indicator.
- 3 Removable lock-down door enabling forced maintaining of the contacts for test or maintenance purposes. During operation, this lock-down door must always be in the closed position.
- 4 LED (depending on version) indicating the relay status.
- 5 Removable legend for relay identification.
- 6 Four notches for rail mounting adapter or panel mounting adapter with fixing lugs.
- 7 Five, eight, eleven or fourteen Faston type pins.
- 8 Area by which the product can be easily gripped.
- 9 Mounting adapter enabling direct mounting of the relay on a panel.
- 10 Mounting adapter enabling direct mounting of the relay on a \square rail.

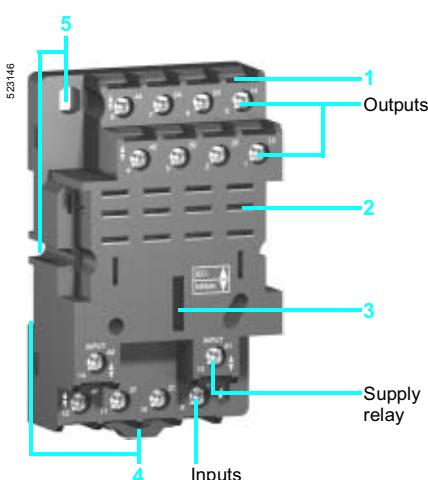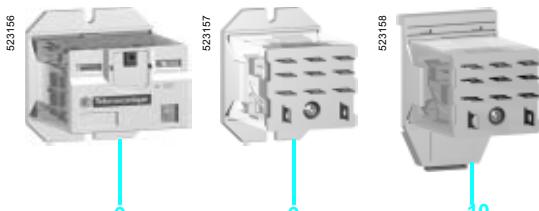

Socket description

Sockets with mixed contact terminals (1)

- 1 Connection by screw clamp terminals.
- 2 Five, eight, eleven or fourteen female contacts for the relay pins.
- 3 Location for protection modules or the timer module.
- 4 Locating slot for mounting on \square rail with fixing clip.
- 5 Two or four fixing holes for panel mounting.

(1) The inputs are mixed with the relay's supply terminals, with the outputs being located on the opposite side of the socket.

General characteristics




Conforming to standards	IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n° 14		
Product certifications	UL, CSA (pending)		
Ambient air temperature around the device	Storage °C	- 40... + 85	
	Operation °C	- 40... + 55	
Vibration resistance	Conforming to IEC/EN 60068-2-6	6 gn (10...50 Hz)	
Degree of protection	Conforming to IEC/EN 60529	IP 40	
Shock resistance	Opening conforming to IEC/EN 60068-2-27	10 gn	
	Closing	10 gn	
Protection category		RT I	
Mounting position		Any	

Insulation characteristics

Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	250 (IEC), 300 (UL, CSA)
Rated impulse withstand voltage (Uimp)		kV	3.6 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	2500
	Between poles	~ V	2500
	Between contacts	~ V	1500

Contact characteristics

Relay type	RPM 1●●●	RPM 2●●●	RPM 3●●●	RPM 4●●●
Number and type of contacts	1 C/O	2 C/O	3 C/O	4 C/O
Contact materials	AgNi			
Conventional thermal current (Ith)	For ambient temperature ≤ 55 °C	A	15	
Rated operational current in utilisation categories AC-1 and DC-1	Conforming to IEC N/O N/C	A	15 7.5	
	Conforming to UL	A	15	
Maximum operating rate	No-load	18 000		
In operating cycles/hour	Under load	1200		
Switching voltage	Maximum	V	~ / ± 250	
Switching capacity	Minimum	mA	100 mA on ± 5 V	
	Maximum	VA	3750	
Utilisation coefficient		20 %		
Mechanical durability	In millions of operating cycles	10		
Electrical durability	Resistive load	0.1		0.06
In millions of operating cycles/hour	Inductive load	See curves below		
Electrical durability of contacts		Reduction coefficient for inductive load ~ (depending on power factor cos φ)	Maximum switching capacity on resistive load	
Resistive load ~			---	



Durability (inductive load) = durability (resistive load) x reduction coefficient.

Coil characteristics

Relay type			RPM 1●●●	RPM 2●●●	RPM 3●●●	RPM 4●●●
Average consumption	~	VA	0.9	1.2	1.5	1.5
	---	W	0.7	0.9	1.7	2
Drop-out voltage threshold	~		≥ 0.15 Uc			
	---		≥ 0.1 Uc			
Operating time (response time)	Between coil energisation and making of the On-delay contact	~	ms	20	25	25
	Between coil de-energisation and making of the Off-delay contact	~	ms	20	25	25
		---	ms	20	25	20
Control circuit voltage Uc		V	12	24	48	110
Relay control voltage codes		JD	BD	ED	FD	-
DC	Average resistance at 20 °C ± 10%	RPM 1●●●	Ω	180	750	2600
		RPM 2●●●	Ω	160	650	2600
		RPM 3●●●	Ω	100	400	2600
		RPM 4●●●	Ω	96	388	1550
Operating voltage limits	Min.	V	9.6	19.2	38.4	88
	Max.	V	13.2	26.4	52.8	121
Relay control voltage codes		-	B7	E7	-	F7
AC	Average resistance at 20 °C ± 15%	RPM 1●●●	Ω	-	160	720
		RPM 2●●●	Ω	-	180	770
		RPM 3●●●	Ω	-	103	770
		RPM 4●●●	Ω	-	84.3	338
Operating voltage limits	Min.	V	-	19.2	38.4	-
	Max.	V	-	26.4	52.8	-
P7						

Socket characteristics

Socket type	RPZ F1	RPZ F2	RPZ F3	RPZ F4	
Relay types used	RPM 1●●●	RPM 2●●●	RPM 3●●●	RPM 4●●●	
Protection module types used	RXM 02●●● RXM 04●●●	RXM 02●●● RXM 04●●●	RUW 24●●●	RUW 24●●●	
Product certifications	UL, CSA (pending)				
Conventional thermal current (Ith)	A	16			
Degree of protection	Conforming to IEC/EN 60529				
Connection	Solid cable without cable end	mm ²	1 conductor: 0.5...2.5 mm ² (AWG 20...AWG 12) 2 conductors: 0.5...1.5 mm ² (AWG 20...AWG 14)		
	Flexible cable with cable end	mm ²	1 conductor: 0.2...2.5 mm ² (AWG 24...AWG 14) 2 conductors: 0.2...1.5 mm ² (AWG 24...AWG 16)		
Maximum tightening torque	Nm	0.8 (M3.5 screw)			
Contact terminal arrangement		Mixed			

Power relays without LED (sold in lots of 10)

Control circuit voltage	Number and type of contacts - Thermal current (I _{th})							
	1 C/O - 15 A		2 C/O - 15 A		3 C/O - 15 A		4 C/O - 15 A	
V	Unit reference	Weight	Unit reference	Weight	Unit reference	Weight	Unit reference	Weight
... 12	RPM 11JD	0.024	RPM 21JD	0.036	RPM 31JD	0.054	RPM 41JD	0.068
... 24	RPM 11BD	0.024	RPM 21BD	0.036	RPM 31BD	0.054	RPM 41BD	0.068
... 48	RPM 11ED	0.024	RPM 21ED	0.036	RPM 31ED	0.054	RPM 41ED	0.068
... 110	RPM 11FD	0.024	RPM 21FD	0.036	RPM 31FD	0.054	RPM 41FD	0.068
~ 24	RPM 11B7	0.024	RPM 21B7	0.036	RPM 31B7	0.054	RPM 41B7	0.068
~ 48	RPM 11E7	0.024	RPM 21E7	0.036	RPM 31E7	0.054	RPM 41E7	0.068
~ 120	RPM 11F7	0.024	RPM 21F7	0.036	RPM 31F7	0.054	RPM 41F7	0.068
~ 230	RPM 11P7	0.024	RPM 21P7	0.036	RPM 31P7	0.054	RPM 41P7	0.068




RPM 32F7



RPM 22F7

Power relays with LED (sold in lots of 10)

... 12	RPM 12JD	0.024	RPM 22JD	0.036	RPM 32JD	0.054	RPM 42JD	0.068
... 24	RPM 12BD	0.024	RPM 22BD	0.036	RPM 32BD	0.054	RPM 42BD	0.068
... 48	RPM 12ED	0.024	RPM 22ED	0.036	RPM 32ED	0.054	RPM 42ED	0.068
... 110	RPM 12FD	0.024	RPM 22FD	0.036	RPM 32FD	0.054	RPM 42FD	0.068
~ 24	RPM 12B7	0.024	RPM 22B7	0.036	RPM 32B7	0.054	RPM 42B7	0.068
~ 48	RPM 12E7	0.024	RPM 22E7	0.036	RPM 32E7	0.054	RPM 42E7	0.068
~ 120	RPM 12F7	0.024	RPM 22F7	0.036	RPM 32F7	0.054	RPM 42F7	0.068
~ 230	RPM 12P7	0.024	RPM 22P7	0.036	RPM 32P7	0.054	RPM 42P7	0.068



RPZ F2 + relay RPM 22F7



RXM 041***



RPZ 1DA



RPZ 3FA

Sockets					
Contact terminal arrangement	Connection	Relay type	Sold in lots of	Unit reference	Weight kg
Mixed	Screw clamp terminals	RPM 1***	10	RPZ F1	0.042
		RPM 2***	10	RPZ F2	0.054
		RPM 3***	10	RPZ F3	0.072
		RPM 4***	10	RPZ F4	0.094
Protection modules					
Description	Voltage	Socket type	Sold in lots of	Unit reference	Weight kg
Diode	— 6...250	RPZ F1 RPZ F2	20	RXM 040W	0.003
		RPZ F3 RPZ F4	20	RUW 240BD	0.004
RC circuit	~ 24...60	RPZ F1 RPZ F2	20	RXM 041BN7	0.010
	~ 110...240	RPZ F1 RPZ F2	20	RXM 041FU7	0.010
		RPZ F3 RPZ F4	20	RUW 241P7	0.004
Varistor	~ /— 6...0.24	RPZ F1 RPZ F2	20	RXM 021RB	0.030
	~ /— 24...60	RPZ F1 RPZ F2	20	RXM 021BN	0.030
	~ /— 110...240	RPZ F1 RPZ F2	20	RXM 021FP	0.030
	~ /— 24	RPZ F3 RPZ F4	20	RUW 242B7	0.004
	~ /— 240	RPZ F3 RPZ F4	20	RUW 242P7	0.004
Timer module (1)					
Description	Voltage	Socket type	Sold in lots of	Unit reference	Weight
Multifunction	~ /— 24...240	RPZ F3 RPZ F4	10	RUW 101MW	0.020
Accessories					
Description	For use with	Sold in lots of	Unit reference	Weight kg	
Metal maintaining clamp (for single-pole relays)	RPZ F1	20	RPZ R235	0.001	
Mounting adapters for L rail (2)	RPM 1***	20	RPZ 1DA	0.004	
	RPM 2***	20	RXZ E2DA	0.004	
	RPM 3***	20	RPZ 3DA	0.004	
	RPM 4***	20	RPZ 4DA	0.006	
Mounting adapters with fixing lugs for panel	RPM 1***	20	RPZ 1FA	0.002	
	RPM 2***	20	RXZ E2FA	0.002	
	RPM 3***	20	RPZ 3FA	0.003	
	RPM 4***	20	RPZ 4FA	0.004	
Clip-in legends (sheet of 108 legends)	All relays	10	RXZ L520	0.080	

(1) See timer module description (selection of functions and time delays) on page 23

(2) Test button becomes inaccessible

Dimensions


Zelio Relay - plug-in relays

RPM power relays


Dimensions

Power relays

RPM 1

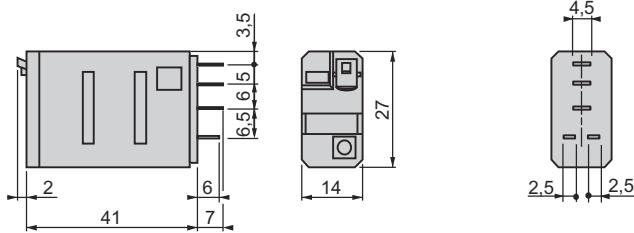


Common side view

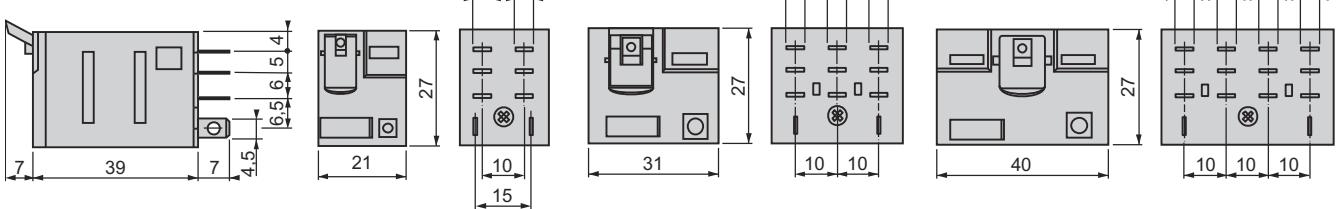


Sockets


RPZ F1

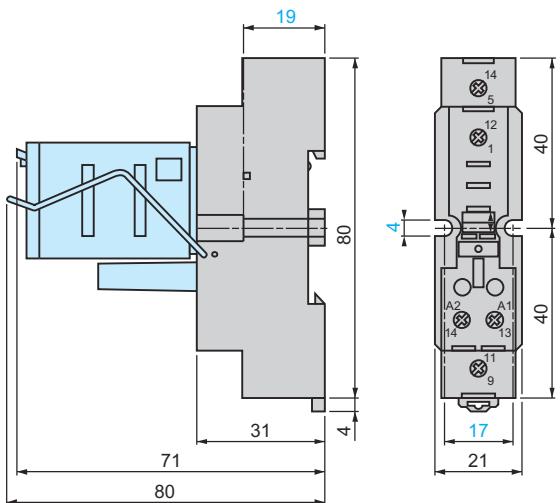


RPZ F2

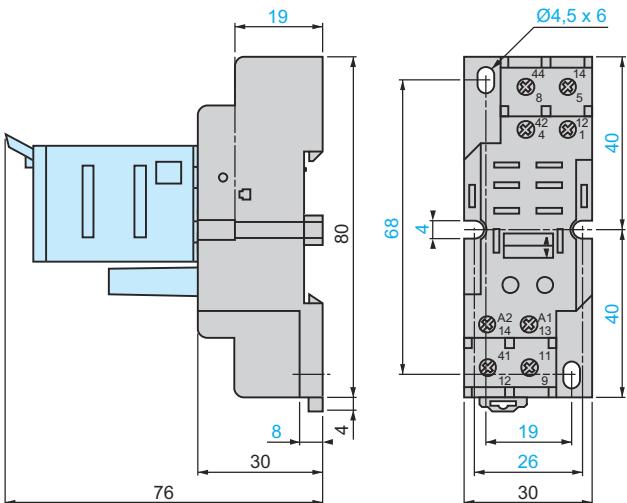



Common side view

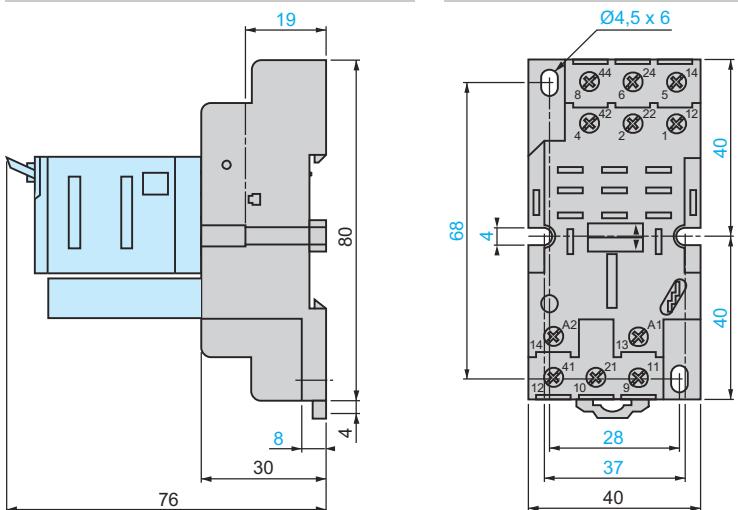


RPZ F4

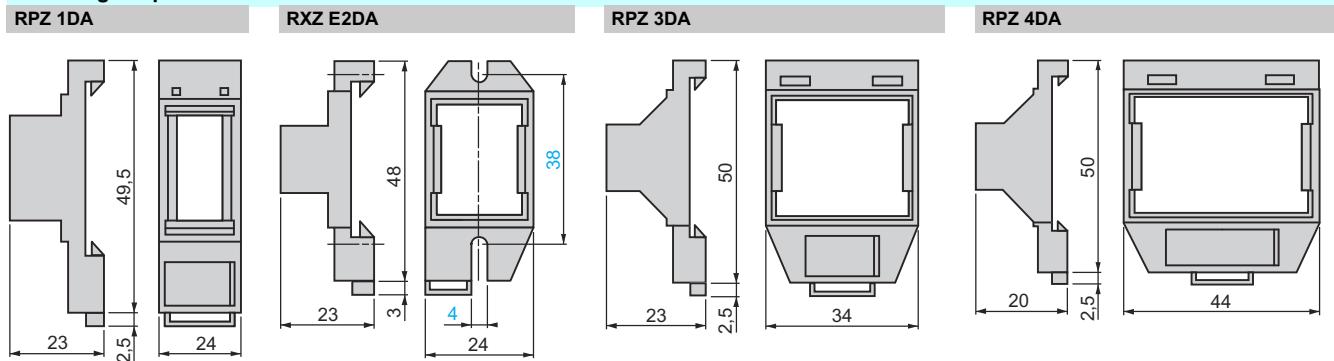Dimensions (continued)Mounting adapters for U_{L} rail

Mounting adapters with fixing lugs for panel

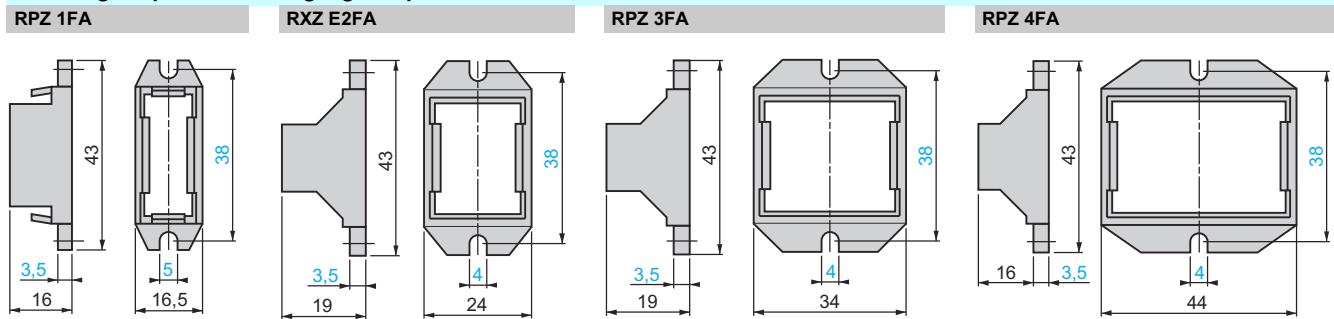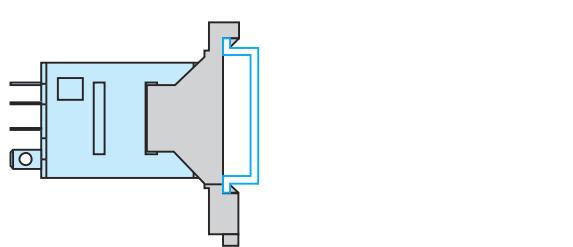
**Mounting**Mounting adapters for U_{L} rail (1)

Mounting adapters with fixing lugs for panel



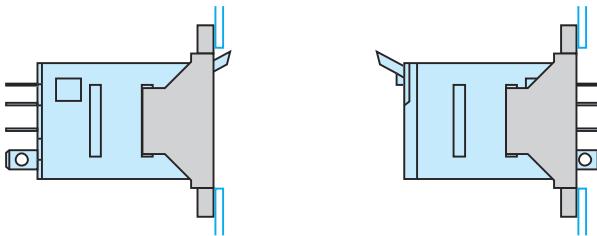


Schemes**Power relays**


RPM 1•••






RPM 2•••



RPM 3•••




RPM 4•••



Symbols shown in blue correspond to Nema marking.

Presentation of the range

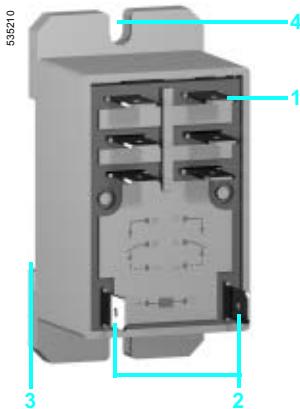

RPF power relays with 2 C/O or 2 N/O contacts comprise:

- 1 Four or six Faston type pins.
- 2 Two relay supply pins.
- 3 A locating slot for mounting on rail.
- 4 Two fixing holes for panel mounting.

General characteristics

Conforming to standards		IEC/EN 61810-1 (iss. 2), UL 508, CSA C22-2 n°14	
Product certifications		UL, CSA (pending)	
Ambient air temperature around the device	Storage	°C	- 40...+ 85
	Operation	°C	- 40...+ 55
Vibration resistance		>10 gn (10...55 Hz)	
Degree of protection	Conforming to IEC/EN 60529	IP 40	
Shock resistance conforming to IEC/EN 60068-2-27	Opening	10 gn	
	Closing	10 gn	
Protection category		RT IV	
Mounting position		Any	

Insulation characteristics

Rated insulation voltage (Ui)	Conforming to IEC/EN 60947	V	250
Rated impulse withstand voltage (Ui _{imp})		kV	3.6 (1.2/50 µs)
Dielectric strength (rms voltage)	Between coil and contact	~ V	2500
	Between poles	~ V	2500
	Between contacts	~ V	1500

Characteristics (continued)

Zelio Relay - plug-in relays

RPF power relays


With clamp fixing

Contact characteristics


Relay type		RPF 2A●●	RPF 2B●●
Number and type of contacts		2 N/O	2 C/O
Contact materials		AgSnO ₂	
Conventional thermal current (I _{th})	For ambient temperature $\leq 40^{\circ}\text{C}$	A	30 (when mounted with 13 mm gap between two relays) 25 (when mounted side by side without a gap)
Rated operational current in utilisation categories AC-1 and DC-1	Conforming to IEC N/O N/C	A	30 3
Maximum operating rate in operating cycles/hour	Conforming to UL No-load Under load	A	30 1200
Switching voltage	Maximum	V	$\sim \text{---} 250$
Switching capacity	Minimum Maximum	mA VA	10 mA on $\text{---} 17\text{ V}$ 7200
Utilisation coefficient			10 %
Mechanical durability	In millions of operating cycles		5
Electrical durability	Resistive load In millions of operating cycles/hour		0.05 (N/O contact only) See curves below

Electrical durability of contacts


Resistive load \sim



Reduction coefficient for inductive load \sim (depending on power factor $\cos \phi$)



Maximum switching capacity on resistive load ---



Durability (inductive load) = durability (resistive load) \times reduction coefficient.

A RPF 2●●●: 30 A
B RPF 2●●●: 25 A

Coil characteristics

Average consumption	\sim	VA	4				
	---	W	1.7				
Drop-out voltage threshold	\sim		$\geq 0.15 U_c$				
	---		$\geq 0.1 U_c$				
Operating time (response time)	Between coil energisation and making of the On-delay contact	\sim	ms	20			
	---	ms		20			
	Between coil de-energisation and making of the Off-delay contact	\sim	ms	20			
	---	ms		20			
Control circuit voltage U_c		V	12	24	110	120	230
Relay control voltage codes		JD	BD	FD	—	—	—
DC	Average resistance at $20^{\circ}\text{C} \pm 10\%$	Ω	86	350	7255	—	—
	Operating voltage limits	Min.	V	9.6	19.2	88	—
		Max.	V	13.2	26.4	121	—
Relay control voltage codes		—	B7	—	F7	P7	—
AC	Average resistance at $20^{\circ}\text{C} \pm 15\%$	Ω	—	250	—	1600	6500
	Operating voltage limits	Min.	V	—	19.2	96	184
		Max.	V	—	26.4	—	253

Zelio Relay - plug-in relays

RPF power relays

With clamp fixing

535210



RPF 2Bxx

Power relays (sold in lots of 10)


Control circuit voltage	Number and type of contacts - Thermal current (Ith)		Weight
	2 N/O - 30 A (1) Unit reference	2 C/O - 30 A (1) Unit reference	
V			kg
~ 12	RPF 2AJD	RPF 2BJD	0.086
~ 24	RPF 2ABD	RPF 2BBD	0.086
~ 110	RPF 2AFD	RPF 2BFD	0.086
~ 24	RPF 2AB7	RPF 2BB7	0.086
~ 120	RPF 2AF7	RPF 2BF7	0.086
~ 230	RPF 2AP7	RPF 2BP7	0.086

(1) 30 A when mounted with 13 mm gap between two relays and 25 A when mounted side by side without a gap.

Dimensions

Power relays

RPF 2A●●, RPF 2B●●

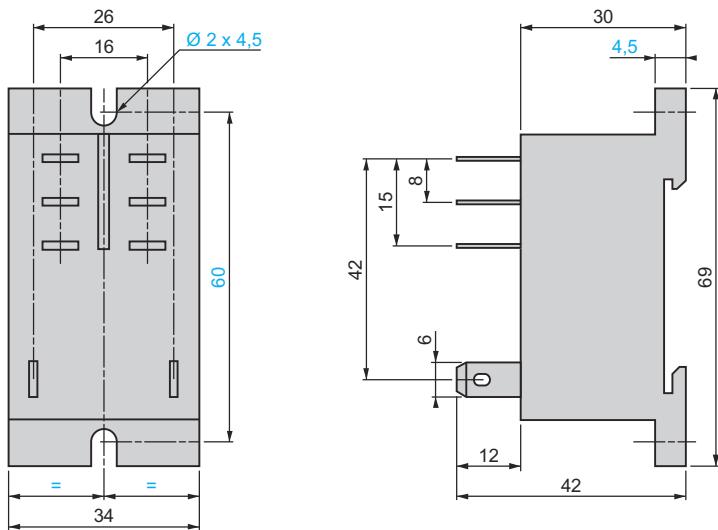


Schemes

Power relays

RPF 2A●●

RPF 2B●●

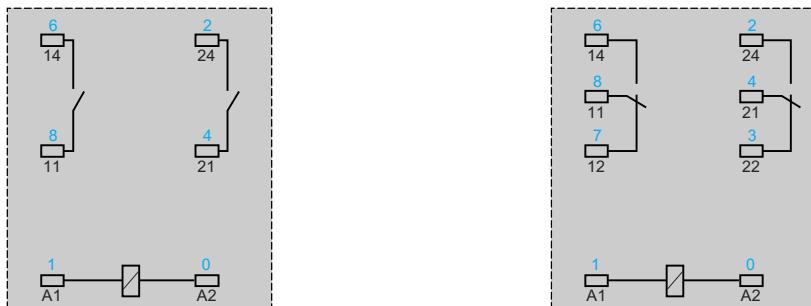

Symbols shown in blue correspond to Nema marking.

Relays			
Contact types			
Symbol	Configuration	EU	USA
	Make contact (Normally Open)	NO	SPST-NO DPST-NO nPST-NO (1)
L	Break contact (Normally Closed)	NC	SPST-NC DPST-NC nPST-NC (1)
L	Changeover Contact	CO	SPDT DPDT nPDT (1)

Utilisation categories		
Category	Type of current	Applications
AC-1	~ single-phase ~ 3-phase	Resistive or slightly inductive loads.
AC-3	~ 3-phase	Starting and braking of squirrel cage motors; reversing direction of rotation only after stopping of motor.
AC-4	~ 3-phase	Starting of squirrel cage motors, inching. Plugging, reversing direction of rotation.
DC-1	---	Resistive or slightly inductive loads (2).
AC-14	~ single-phase	Control of electromagnetic loads (< 72 VA), auxiliary control relays, power contactors, electromagnetic solenoid valves and electromagnets.
AC-15	~ single-phase	Control of electromagnetic loads (> 72 VA), auxiliary control relays, power contactors, electromagnetic solenoid valves and electromagnets.
DC-13	---	Control of electromagnetic loads, auxiliary control relays, power contactors, magnetic solenoid valves and electromagnets.

Protection categories		
Category	Explanation	Condition
RT 0	Unenclosed relay	Relay not provided with a protective case.
RT I	Dust protected relay	Relay provided with a case which protects its mechanism from dust.
RT II	Flux-proof relay	Relay capable of being automatically soldered without allowing the migration of solder fluxes beyond the intended areas.
RT III	Wash-tight relay	Relay capable of being automatically soldered and then washed to remove flux residues without risk of ingress of flux or washing solvents.
RT IV	Sealed relay	Relay provided with a case which has no venting to the outside atmosphere.
RT V	Hermetically sealed relay	Sealed relay having an enhanced level of sealing.

(1) n = number of contacts.

(2) The switchable voltage can be doubled, for an equal current, by connecting two contacts in series.

Protection modules

Whenever an inductive load is de-energised (coil of a relay or of a contactor), an overvoltage appears at its terminals. This voltage peak can reach several thousand volts and a frequency of several MHz.

It is likely to disturb the operation of automation systems which contain electronic devices.

Protection modules are used to reduce the voltage peak on de-energisation and they therefore limit the energy of interference signals to a level that will not disturb surrounding coils and electronic devices.

These modules are used to avoid:

- electromagnetic compatibility problems,
- the deterioration of contact materials,
- the destruction of insulation due to overvoltage,
- the destruction of electronic components.


Diode protection module (with or without LED)

■ Advantages


- accumulation of energy allowing current flow in the same direction,
- absence of any voltage peaks at the coil terminals,
- low cost.

■ Disadvantages


- increase in relay drop-out time (3 to 4 times the usual time),
- no polarity protection,
- de-energisation of the relay.

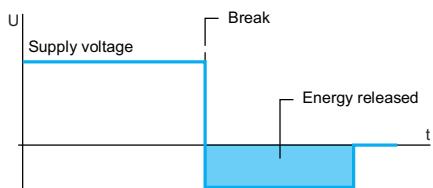

Coil voltage with diode protection module (--- only)

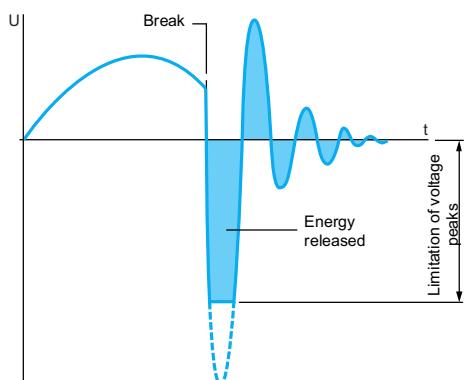

Coil voltage with varistor protection module (~/~ and ---)

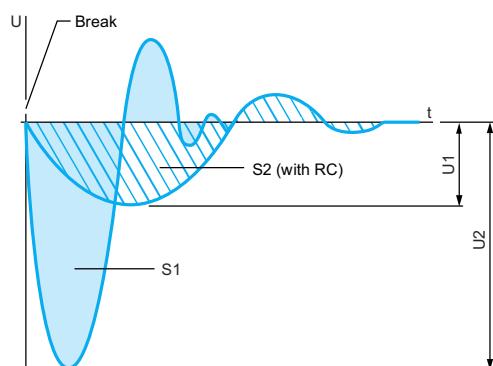

Coil voltage with RC circuit protection module (~/~ only)

S1 = S2 = Energy released

Protection module with varistor

■ Advantages

- can be used with ~/~ and --- supply,
- voltage peak limited to about 2 Un,
- little effect on relay drop-out time.

■ Disadvantages

- no modification of coil's own oscillating frequency,
- limitation of switching frequency.

Protection module with RC circuit

■ Advantages

- coil oscillating frequency reduced to about 150 Hz,
- voltage peak limited to 3 Un,
- little effect on relay drop-out time.

■ Disadvantages

- no protection for low voltages.

The efficiency of Telemecanique branded *solutions*

Used in combination, Telemecanique products provide quality solutions, meeting all your *Automation* and *Control* applications requirements.



A worldwide presence

Constantly available

- More than 5 000 points of sale in 130 countries.
- You can be sure to find the range of products that are right for you and which complies fully with the standards in the country where they are used.

Technical assistance wherever you are

- Our technicians are at your disposal to assist you in finding the optimum solution for your particular needs.
- Schneider Electric provides you with all necessary technical assistance, throughout the world.

Schneider Electric Industries SAS

Head Office
89, bd Franklin Roosevelt
92506 Rueil-Malmaison Cedex
France
www.schneider-electric.com
www.telemecanique.com

Due to evolution of standards and equipment, the characteristics indicated in texts and images of this document do not constitute a commitment on our part without confirmation.
Design: Schneider Electric
Photos: Schneider Electric
Printed by:

Simply Smart !

DIA3ED2051206EN