


TPB Series

Standard Products

TPB series are the standard products corresponding to the diversification of the needs.

*The D3 size products of TPB series are to be discontinued manufacturing. Please use the D3L size of TPB series when you design new products.

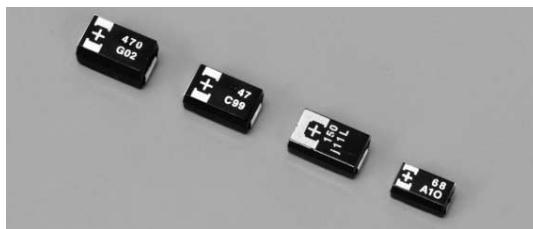

■ Specifications

Items	Condition	Characteristics		
Operating Temperature range	—	−55 to +105(°C)		
Rated capacitance range	120Hz/20°C	47 to 1000(μF)		
Capacitance tolerance	120Hz/20°C	M:±20%		
Rated voltage	—	2.5 to 10.0(V.DC)		
Dissipation Factor (D.F.)	120Hz/20°C	≤8.0 or 10.0 or 15.0(%)		
Leakage current	Rated voltage applied, after 5 minutes	≤0.1CV(μA)		
Equivalent series resistance E.S.R(mΩmax.)	100kHz/20°C	Please see the attached characteristics list		
Temperature characteristics of Impedance ratio	100kHz/+20°C	−55°C	Z/Z _{20°C}	1.0 to 2.0
		+105°C	Z/Z _{20°C}	0.6 to 1.0
Endurance	105°C, 2000h, rated voltage applied	△C/C	Within±20% of the initial value	
		D.F.	≤1.5 times the initial limit	
		L.C.	≤The initial limit	
Damp heat (Steady state)	60°C, 90 to 95%RH, 500h, No voltage applied	△C/C	Within+50%, −20% of the initial value (2R6TPB1000M) Within+40%, −20% of the initial value (Except for the above model)	
		D.F.	≤1.5 times the initial limit	
		L.C.	≤3 times the initial limit	
Surge	105°C, 1000 cycles, 1kΩ discharge resistance, surge voltage applied	△C/C	Within±5% of the initial value	
		D.F.	≤The initial limit	
		L.C.	≤3 times the initial limit	

■ Dimensions (unit: mm)

(C,D3,D4 size)	(D3L size)	Size code	L ^{※1} (±0.2)	W (±0.2)	H (±0.2)	S (±0.2)	W1 (±0.1)
		C	6.0	3.2	2.8	1.3	1.8
		D3L	7.3	4.3	2.8	1.3	2.4
		D3	7.3	4.3	3.1	1.3	2.4
		D4	7.3	4.3	3.8	1.3	2.4

※1 ±0.3:D3L,D4

■ Size List

RV (V _V)	2.5 (3.2)	4.0 (5.0)	6.3 (8.0)	8.0 (10.0)	10.0 (13.0)	RV (V _V)	2.5 (3.2)	4.0 (5.0)	6.3 (8.0)	8.0 (10.0)	10.0 (13.0)
μF						μF					
47					C	220	C	C,D3,D3L	D3L		D3L,D4
68					C	330	D3,D3L	D3L	D3L,D4		D4
82				C		470	D3L	D4,D3L	D4		
100			C		D3,D3L	680	D4,D3L	D4			
150		C	C,D3,D3L		D3L	1000	D4				

TPB Series

Characteristics List

Size code	SANYO Part number	Rated Voltage (V)	Rated Capacitance (μF)	D.F. (%max.)	L.C. (μA) max./5min.	E.S.R. (m Ω max.) 100kHz/20°C	Maximum allowable ripple current (mAmps) 100kHz ^{※1}	MSL	
								Reflow Temp. $\leq 260^\circ\text{C}$	Reflow Temp. $\leq 250^\circ\text{C}$
C	10TPB47MC	10.0	47	8.0	47.0	55	1500	3	3
	10TPB68MC	10.0	68	8.0	68.0	55	1500		
	8TPB82MC	8.0	82	8.0	65.6	45	1700		
	6TPB100MC	6.3	100	8.0	63.0	45	1700		
	6TPB150MC	6.3	150	8.0	94.5	45	1700		
	4TPB150MC	4.0	150	8.0	60.0	45	1700		
	4TPB220MC	4.0	220	8.0	88.0	45	1700		
	2R5TPB220MC	2.5	220	8.0	55.0	45	1700		
D3L	10TPB100ML	10.0	100	8.0	100.0	55	1900	3	2a
	10TPB150ML	10.0	150	10.0	150.0	40	2000		
	10TPB220ML	10.0	220	10.0	220.0	40	2000		
	6TPB150ML	6.3	150	8.0	94.5	55	1900		
	6TPB220ML	6.3	220	10.0	138.6	40	2000		
	6TPB330ML	6.3	330	10.0	207.9	40	2000		
	4TPB220ML	4.0	220	8.0	88.0	55	1900		
	4TPB330ML	4.0	330	10.0	132.0	40	2000		
	4TPB470ML	4.0	470	10.0	188.0	40	2000		
	2R5TPB330ML	2.5	330	8.0	82.5	55	1900		
	2R5TPB470ML	2.5	470	10.0	117.5	40	2000		
	2R5TPB680ML	2.5	680	10.0	170.0	40	2000		
D3	10TPB100M	10.0	100	8.0	100.0	55	1900		
	6TPB150M	6.3	150	8.0	94.5	55	1900		
	4TPB220M	4.0	220	8.0	88.0	65	1500		
	2R5TPB330M	2.5	330	8.0	82.5	65	1500		
D4	10TPB220M	10.0	220	10.0	220.0	40	3000		
	10TPB330M	10.0	330	10.0	330.0	35	3000		
	6TPB330M	6.3	330	10.0	207.9	40	3000		
	6TPB470M	6.3	470	15.0	296.1	35	3000		
	4TPB470M	4.0	470	10.0	188.0	40	3000		
	4TPB680M	4.0	680	15.0	272.0	35	3000		
	2R5TPB680M	2.5	680	10.0	170.0	40	3000		
	2R5TPB1000M	2.5	1000	15.0	250.0	30	3000		

※1:100k to 500kHz,45°C