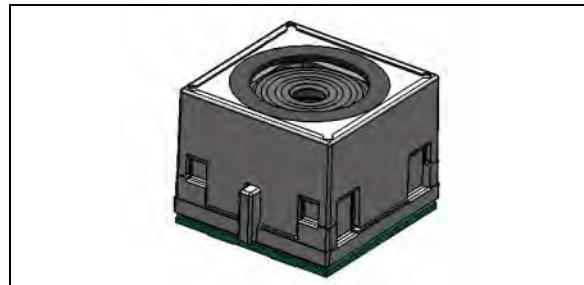


## 3.2 Megapixel QXGA camera module with auto focus

Data Brief

### Features

- 3.2 Megapixel resolution (2048H x 1536V)
- 2.2  $\mu$ m pixel size, 1/3.2 inch optical format
- RGB Bayer color filter array
- Integrated 10-bit ADC
- Fully integrated auto-focus mechanism
- Multi-element, high quality lens
- SMIA Profile 2 Functional & CCP2 compliant
- Up to 20 fps QXGA progressive scan
- Up to 30 fps 1024x768 via sub-sampling or 2x2 analogue binning
- Smooth frame rate control
- Full raw Bayer down scaler from 1x to 8x in steps of 1/16<sup>th</sup>
- Output pixel rate de-rating with scaling
- Integrated defect correction
- Automatic dark level calibration
- CCP2 SubLVDS bit-serial interface (640 Mbps)
- 2-wire 400 kHz camera control interface (CCI)
- On-chip PLL, 6.0 to 27 MHz clock input
- Analog power supply: 2.4 to 2.9V
- Separate digital I/O power supply: 1.7 to 2.9V
- Ultra low power standby mode (< 30 $\mu$ W)
- 9.5 x 9.5 x 7.6 mm<sup>3</sup> auto focus camera module with embedded passives
- Integral EMC shielding and EMI reduction techniques
- Lead-free RoHS compliant product



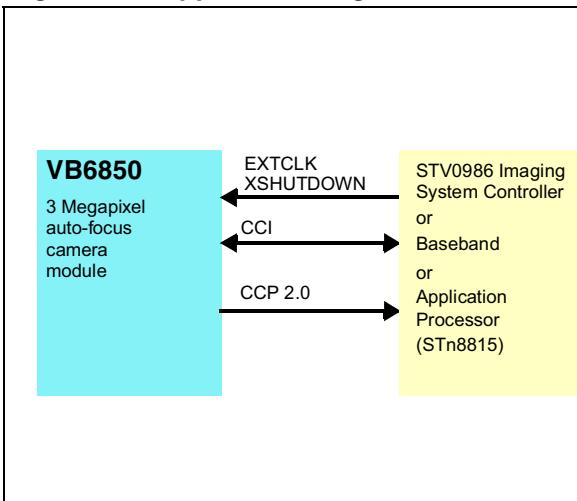
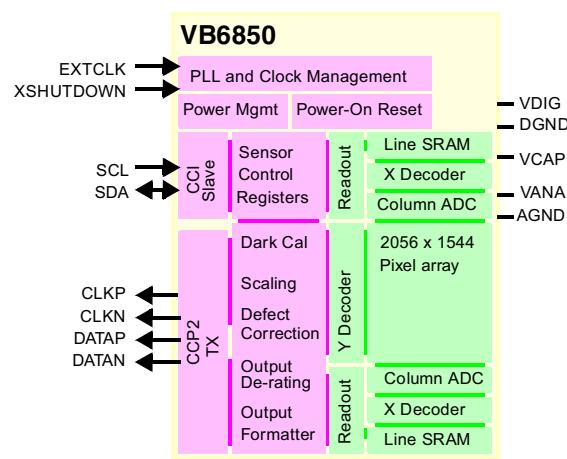
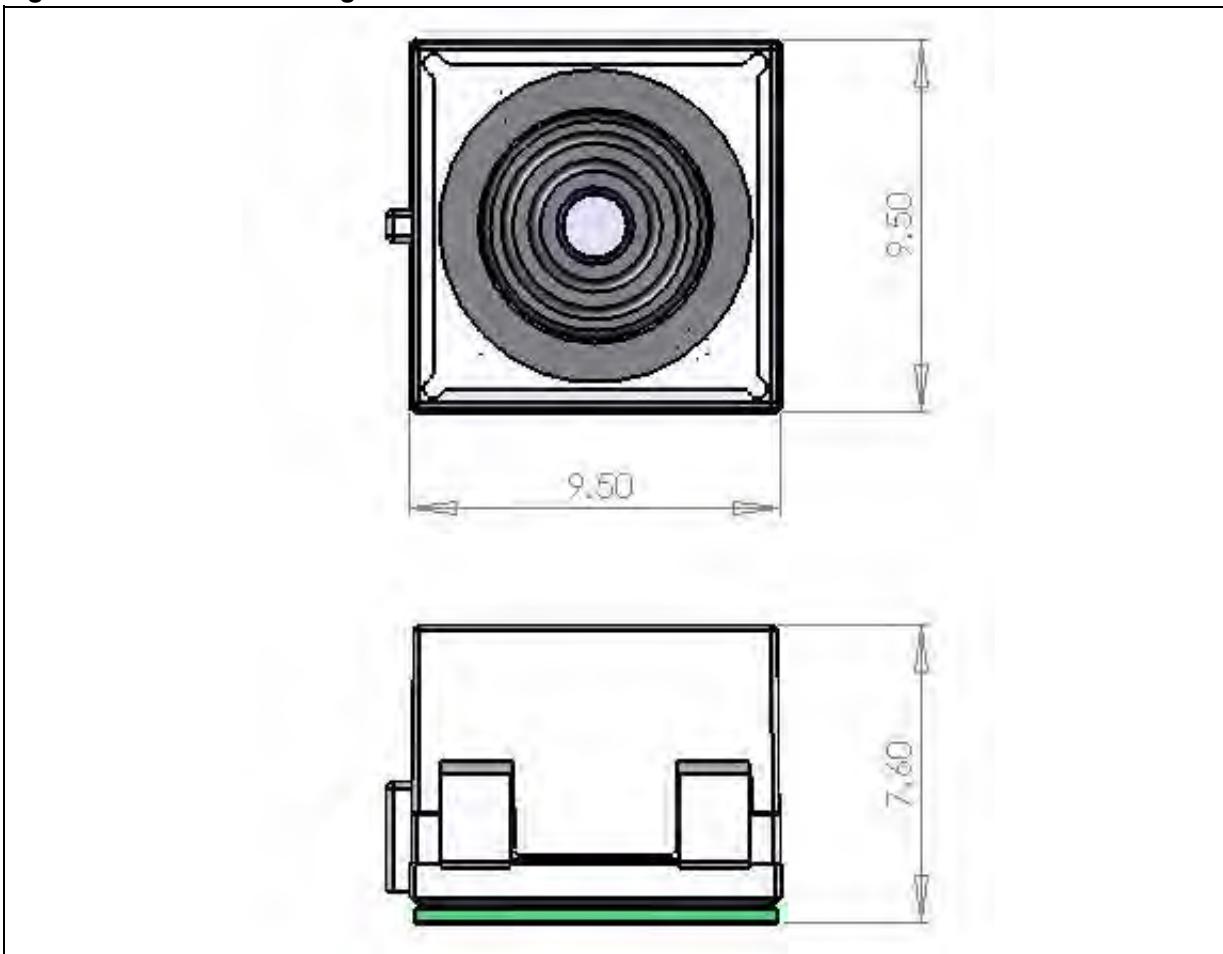
### Description

The VB6850 is a QXGA auto-focus raw Bayer camera module targeting mobile applications. Manufactured using ST 0.13  $\mu$ m CMOS imaging process, it integrates a high performance 2.2  $\mu$ m pixel and is compliant with both the functional (Profile 2) and CCP2 parts of the SMIA specification revision 1.0.

VB6850 is capable of streaming QXGA raw Bayer image data up to 20 fps.

The auto-focus mechanism combined with a multi-element lens provides excellent image quality at focus distances from less than 10 cm to infinity.

All external components, including the auto-focus actuator drivers, are integrated inside the camera module, apart from two CCI pull-up resistors. Control of the integrated AF driver is via the VB6850 CCI I/F yielding straight forward system integration.

**Figure 1. Application diagram****Figure 2. Block diagram****Figure 3. Outline drawing**

**Table 1. Technical specifications**

|                             |  |
|-----------------------------|--|
| Active Pixels               | 2048H x 1536V (QXGA)   |
| Physical pixel array        | 2056H x 1544V  |
| Pixel size                  | 2.2 µm x 2.2 µm  |
| Color filter array          | RGB Bayer  |
| Sensor technology           | 0.13um HCMOS9I   |
| Exposure control            | +81 dB   |
| Analog gain                 | +24 dB (max.)  |
| Dynamic range               | 60 dB (typical)  |
| Signal-to-noise ratio (SNR) | 37 dB at 100 lux (typical)   |
| Frame rate                  | 1 to 20 Hz QXGA  |
| Pixel format (s)            | RAW Bayer 8-bit<br>RAW Bayer 10-bit<br>RAW Bayer 10 to 8-bit compressed      |
| Video interface(s)          | CCP2 Class2 640 Mbps   |
| Control interface           | 400 kHz CCI  |
| Clock input                 | 6.0 to 27 MHz square<br>(on-chip PLL)  |
| Supply voltage              | Analogue: 2.7 V - 2.9 V<br>Digital IO: 1.7 V - 2.9 V<br>Vact: 2.8V (nominal) |
| Power consumption           | <200 mW (@20 frame/s)<br><30 µW (standby mode)                               |
| Lens                        | 51° ±2 HFOV, f# 2.8  |
| Depth of field              | 10 cm -> infinity  |
| TV distortion               | < 1%   |
| Relative illumination       | 50% (typ)  |
| Package type                | AF95   |
| Package size                | 9.5 mm x 9.5 mm x 7.6 mm (wlh)   |
| System attach               | Socket <sup>(1)</sup> and Flex <sup>(2)</sup>                                |

1. VB6850 module is compatible with the SMIA95 socket.

2. VB6850 module is compatible with flex attach.

**Table 2. Temperature range**

|                   |               |
|-------------------|---------------|
| Storage           | -40 to +85°C  |
| Functional        | -30 to +70°C  |
| Normal operating  | -25 to +55 °C |
| Optimal operating | +5 to +30°C   |
| Test              | 23 ± 2°C      |

## Ordering information

**Table 3. Order codes**

| Part number   | Package                                     |
|---------------|---|
| VB6850S02I/T2 | SMIA95 AF 9.5 mm x 9.5 mm x 7.6 mm - Socket |

## Revision history

**Table 4. Document revision history**

| Date        | Revision | Changes          |
|-------------|----------|------------------|
| 12-Jan-2007 | 1        | Initial release. |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZE REPRESENTATIVE OF ST, ST PRODUCTS ARE NOT DESIGNED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS, WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

