



## 8020 Series

# Snap-Acting Momentary Pushbutton Switches



8121SHZGE



8321SD3V41GE



8121J85ZGE223



8421SD9AV1GE

models available, see page C-4.

C

### Easy Build-A-Switch

Below is a complete listing of available options for 8020 SERIES SNAP-ACTING MOMENTARY PUSHBUTTON SWITCHES. Build-A-Switch allows you to mix and match options to create the switch you need—simply select desired option from each category. Switches with standard options are shown on page C-3; all available options are shown and described on pages C-4 thru C-17. When building a part number, some ordering format boxes may not be filled. Dashes, hyphens or spaces in the part number are not significant, and are shown for clarity only. Complete HOW TO ORDER information is at the end of this section, page C-17. Actuator caps, frames, hardware and accessories are available separately, see section K. All models have epoxy terminal seal, and are compatible with 'bottom-wash' PC board cleaning methods.




SWITCH FUNCTION	ACTUATOR OR PLUNGER	BUSHING	TERMINATIONS	CONTACT MATERIAL	SEAL	CAP COLOR	FRAME COLOR	LED COLOR
				Gold	Epoxy	Black	Black	Red
8121	J80	(NONE)	A	V21	B	E	(NONE)	(NONE)
8125	J81	D	A2	V31	G	I	1	3
8221	J82	D2	A3	V41	K	2	2	5
8225	J83	D3	A4	V61	L	3	3	6
8321	J84	D8	A6	V71				
8325	J85	D9	AV1	V81				
8421	J95	H	AV2	V91				
8425	L	H9	AV3	W				
U811	M	Y	AV4	W1				
U821	S	Y3	AW	W3				
U831		Y4	AW1	W4				
U841		Y9	AW3	Z				
			AW4	Z3				
			C					
			R					
			R2					
			V2					
			V3					
			V4					
			V6					
			V7					
			V8					
			V9					



## 8020 Series

# Snap-Acting Momentary Pushbutton Switches




### SWITCHES WITH STANDARD OPTIONS

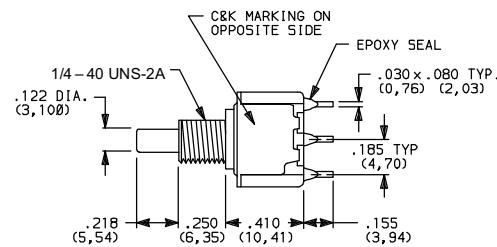

Terminal Nos.  
For Reference Only

#### SPDT Model




Part No. Shown: 8121SHZGE

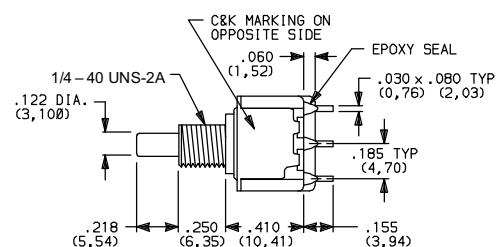

Terminal Nos.  
For Reference Only

#### DPDT Model




Part No. Shown: 8221SHZGE

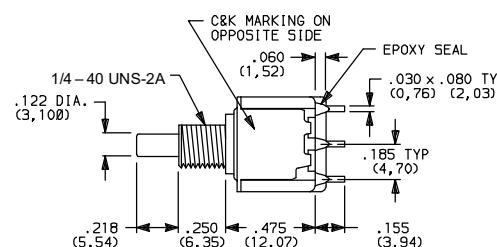

Terminal Nos.  
For Reference Only

#### 3PDT Model

Part No. Shown: 8321SHZGE

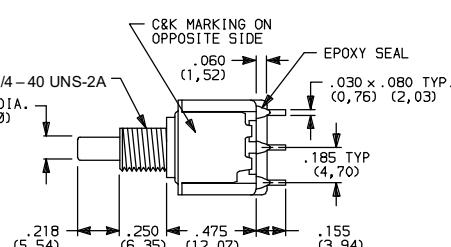

Terminal Nos.  
For Reference Only

#### 4PDT Model

Part No. Shown: 8421SHZGE




**COMPONENTS, INC.** 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936



## 8020 Series

# Snap-Acting Momentary Pushbutton Switches

### SWITCH FUNCTION



NO. POLES	MODEL NO.	UL/CSA* MODEL NO.	SWITCH FUNCTION		CONNECTED TERMINALS		SCHEMATIC
			POS. 1	POS. 2	POS. 1	POS. 2	
SP	8121	U811	ON	MOM.	1-3	1-2	SPDT
	8125		ON	MOM.			
DP	8221	U821	ON	MOM.	1-3-4-6	1-2-4-5	DPDT
	8225		ON	MOM.			
3P	8321	U831	ON	MOM.	1-3-4-6-7-9	1-2-4-5-7-8	3PDT
	8325		ON	MOM.			
4P	8421	U841	ON	MOM.	1-3-4-6-7-9-10-12	1-2-4-5-7-8-10-11	4PDT
	8425		ON	MOM.			

MOM. = Momentary


\* U811 thru U841 model numbers with all options (except R, R2 terminations) when ordered with G or L contact material.

See AGENCY APPROVALS, page VIII.


8X25 models must be ordered with B or K contact material.

8X21 and U8X1 models must be ordered with G or L contact material.

### ACTUATOR—SNAP-IN FRONT MOUNT




J80

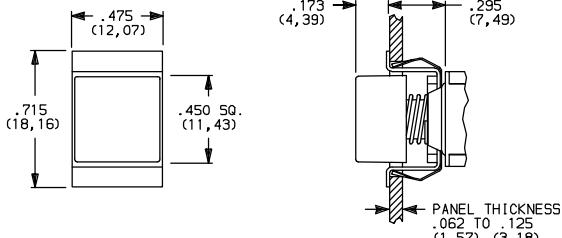


No frame color choice required.

J81

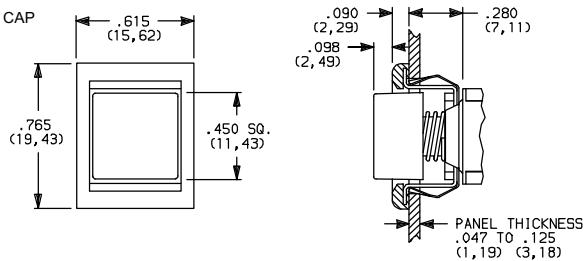

J83

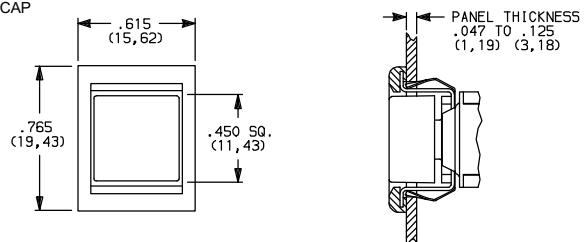

#### CAP AND FRAME COLORS


OPTION CODE	COLOR
(NONE)	No Frame Color (J80 option)
1	WHITE
2	BLACK (Std.)
3	RED

Other colors available, consult factory.  
Cap and Frame Finish: matte.

NOTE: Available with C, W-W4, Z or Z3 terminations and SPDT and DPDT models only.

#### PANEL MOUNTING

J80, J81 & J83 Actuators



\*\* Increase this dim. to .620/.625 (15.75/15.88) for .091/.125 (2.31/3.18) thk. panels.




COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936



## 8020 Series

# Snap-Acting Momentary Pushbutton Switches


### ACTUATOR—SNAP-IN FRONT MOUNT



**J82** WITH FRAME FOR LED AND RAISED CAP




LED not included.  
See page IX for LED information.

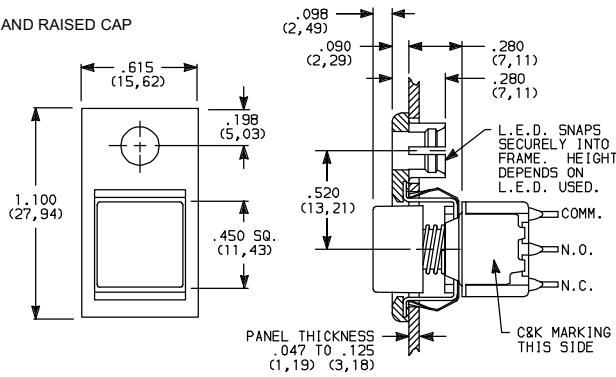

**J84** WITH FRAME FOR LED AND FLUSH CAP



LED not included.  
See page IX for LED information.

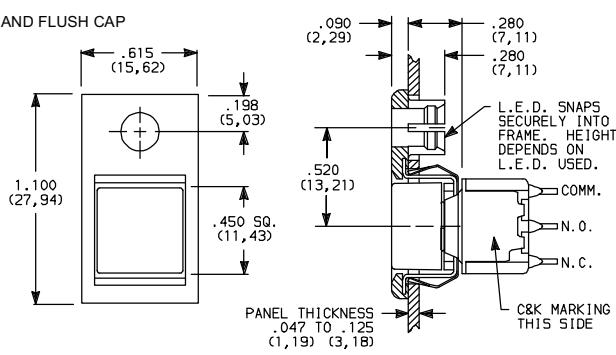

#### CAP AND FRAME COLORS

OPTION CODE	COLOR
1	WHITE
2	BLACK (Std.)
3	RED


Other colors available, consult factory.  
Cap and frame finish: matte.

NOTE: Available with C, W-W4, Z or Z3 terminations and SPDT and DPDT models only.

C


#### PANEL MOUNTING

J82 & J84 Actuators

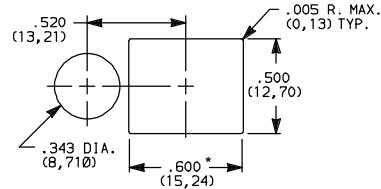


\* Increase this dim. to .620/.625 (15,75/15,88) for .091/.125 (2,31/3,18) thk. panels.


### ACTUATOR—SNAP-IN FRONT MOUNT



**J85** WITH FRAME, RAISED CAP, AND BUILT-IN LED

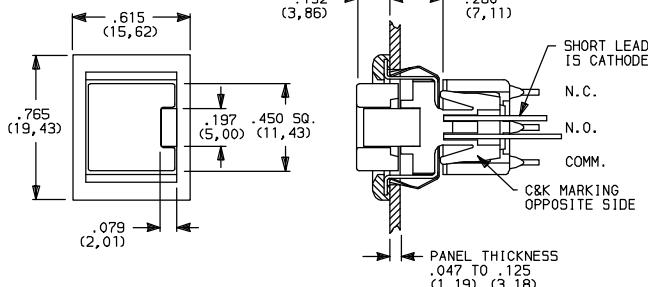

#### PANEL MOUNTING



\* Increase this dim. to .620/.625 (15,75/15,88) for .091/.125 (2,31/3,18) thk. panels.

See page IX for LED information.

#### CAP AND FRAME COLORS

OPTION CODE	COLOR
1	WHITE
2	BLACK (Std.)
3	RED

#### LED COLORS

OPTION CODE	COLOR
3	RED (Std.)
5	YELLOW
6	GREEN

Other colors available, consult factory.  
Cap and frame finish: matte.

NOTE: Available with C, W-W4, Z or Z3 terminations and SPDT and DPDT models only.








## 8020 Series

# Snap-Acting Momentary Pushbutton Switches


### ACTUATOR—PC MOUNT



**J95** WITH BUILT-IN LED



PC MOUNTING



See page IX for LED information.

#### CAP COLORS

OPTION CODE	COLORS
1	WHITE
2	BLACK (Std.)
3	RED

#### LED COLORS

OPTION CODE	COLORS
3	RED (Std.)
5	YELLOW
6	GREEN

Cap Finish: matte. Other colors available, consult factory.


NOTE: Available with V3 terminations and SPDT models only.

### PLUNGER




**(NONE)** NO PLUNGER CHOICE REQUIRED (JXX ACTUATORS)

**S** (STD.)




AVAILABLE BUSHINGS	DIM. 'A' FOR C, W-W4, Z & Z3 TERMINATIONS	DIM. 'A' FOR A, A2, A3, A4, A6, AV1-AV4, AW-AW4, R & R2 TERMINATIONS	DIM. 'A' FOR V2-V91 TERMINATIONS
D, D9	.244 (6,20)	.228 (5,79)	.224 (5,69)
H, H9	.218 (5,54)	.202 (5,13)	.198 (5,03)
Y, Y9	.203 (5,16)	.187 (4,75)	.183 (4,65)
Y3	(5,54)	(5,13)	(5,03)
Y4	.185 (4,70)	.169 (4,29)	.165 (4,19)
D2, D8	N/A	.232 (5,89)	.228 (5,79)
D3	.178 (4,52)	.162 (4,11)	.158 (4,01)

**L**



AVAILABLE BUSHINGS	DIM. 'B' FOR C, W-W4, Z & Z3 TERMINATIONS	DIM. 'B' FOR A, A2, A3, A4, A6, AV1-AV4, AW-AW4, R & R2 TERMINATIONS	DIM. 'B' FOR V2-V91 TERMINATIONS
Y, Y9	.178 (4,52)	.162 (4,11)	.158 (4,01)
Y4	.090 (2,29)	.074 (1,88)	.070 (1,78)

**M** SNAP-FITTING



AVAILABLE BUSHINGS	DIM. 'C' FOR C, W-W4, Z & Z3 TERMINATIONS	DIM. 'C' FOR A, A2, A3, A4, A6, AV1-AV4, AW-AW4, R & R2 TERMINATIONS	DIM. 'C' FOR V2-V91 TERMINATIONS
D, D9	.297 (7,54)	.281 (7,14)	.277 (7,04)
H, H9	.267 (6,78)	.251 (6,38)	.247 (6,27)
Y, Y9	.259 (6,58)	.243 (6,17)	.239 (6,07)
Y3	(6,78)	(6,37)	(6,27)
Y4	.259 (6,58)	.243 (6,17)	.239 (6,07)
D2, D8	N/A	.273 (6,93)	.269 (6,83)
D3	.377 (9,58)	.361 (9,17)	.357 (9,07)

N/A = NOT AVAILABLE

NOTE: When selecting plunger option, bushing selection must also be made, see next page. No plunger option is required when any JXX actuator option is selected. Additional plunger lengths are available on SPDT and DPDT models, consult factory. Not all plunger lengths sufficient for use with caps. See cap dims., section K.



COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936




## 8020 Series

# Snap-Acting Momentary Pushbutton Switches


### BUSHING

**(NONE)** NO BUSHING CHOICE REQUIRED (JXX ACTUATORS)





**D**  
**D9** UNTHREADED



**H**  
**H9** UNTHREADED



**Y**  
**Y9** UNTHREADED

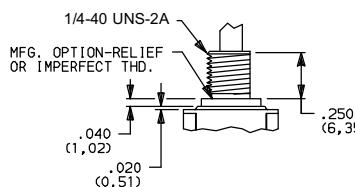

D9 bushing standard with A-A6, AW-AW4, R, R2 AV1-AV4 terminations.

H bushing standard with C, W-W4, Z or Z3 terminations.  
H, H9 bushings not available on single pole models with  
A3-A6, AW-AW4, R, R2 terminations.

Will withstand 12 in./lbs. of torque with no distortion.









**Y3** METRIC

**Y4**

**D2**

**D8** UNTHREADED

**D3**



Y3 & Y4 bushings not available on single pole models with  
A3-A6, AW-AW4, R, R2 terminations. Will withstand 12 in./lbs.  
of torque with no distortion.


D2, D8 bushings not available with  
C, W-W4, Z, Z3 terminations.

D3 bushing standard with V2-V91  
terminations.


**NOTE:** No bushing option choice required when JXX actuator option is selected. When selecting bushing option, plunger selection must also be made, see previous page. Plunger lengths vary with bushing and termination options selected.

### PANEL MOUNTING


#### 1/4 INCH BUSHING



Without locking ring




With standard locking ring




With small locking ring

#### METRIC BUSHING



Without locking ring



With locking ring

**NOTE:** Two mounting nuts, locking ring and lockwasher supplied standard with threaded bushings.  
Optional mounting nut and locking ring styles available, see HARDWARE, section K.



**COMPONENTS, INC.** 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936




## 8020 Series

# Snap-Acting Momentary Pushbutton Switches

### TERMINATIONS


**Z** (STD.)




**SPDT thru 4PDT Models**

NOTE: Not available with J95 actuator, K or L contact material.


**C**



PC MOUNTING



**Z3** QUICK CONNECT




**SPDT thru 4PDT Models**

NOTE: Not available with J95 actuator, K or L contact material. Mating quick connector available, order part no. 530100000.

**SPDT thru 4PDT Models**




NOTE: Not available with J95 actuator option.

**W, W1, W3, W4** WIRE WRAP




OPTION CODE	DIM 'A'
<b>W</b>	.750 (19,05)
<b>W1</b>	.964 (24,49)
<b>W3</b>	.425 (10,80)
<b>W4</b>	1.062 (26,97)

**SPDT Model**

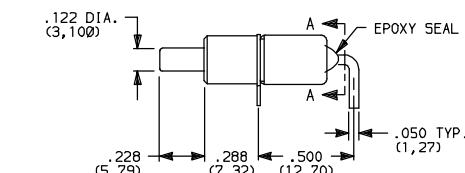


Part No. Shown: 8121SD9AGE





SECTION A-A

Terminal Nos.  
For Reference Only.

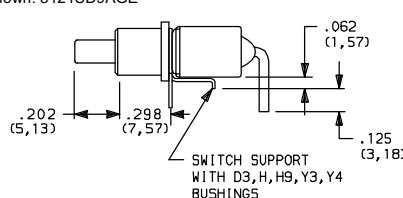


NOTE: Terminal bend radii and lead-in manufacturing option.  
Not available with JXX actuators and I seal.

**A3** SNAP-IN




**AW, AW1, AW3, AW4** EXTENDED



OPTION CODE	DIM 'A'
<b>AW</b>	.50 (12,7)
<b>AW1</b>	.72 (18,3)
<b>AW3</b>	.20 (5,1)
<b>AW4</b>	.83 (21,1)

PC MOUNTING



COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936






## 8020 Series

# Snap-Acting Momentary Pushbutton Switches

### TERMINATIONS

**A**

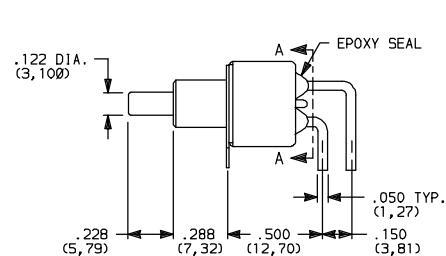

**SECTION A-A**


Terminal Nos. For Reference Only

#### DPDT Model


Part No. Shown: 8221SD9AGE

**NOTE:** Terminal bend radii and lead-in manufacturing option.  
Not available with JXX actuators and I seal option.

#### A3 SNAP-IN




#### AW, AW1, AW4 EXTENDED






OPTION CODE	DIM 'A'
<b>AW</b>	.19 (4.8)
<b>AW1</b>	.40 (10.2)
<b>AW4</b>	.50 (12.7)

#### PC MOUNTING



**A**

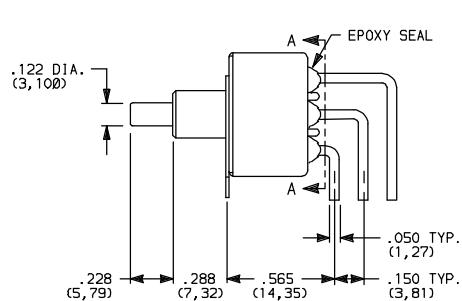

**SECTION A-A**


Terminal Nos. For Reference Only

#### 3PDT Model

Part No. Shown: 8321SD9AGE


**NOTE:** Terminal bend radii and lead-in manufacturing option.  
Not available with JXX actuators and I seal option.

#### AW4 EXTENDED



OPTION CODE	DIM 'A'
<b>AW4</b>	.37 (9.4)

#### PC MOUNTING



COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936




## 8020 Series

# Snap-Acting Momentary Pushbutton Switches


### TERMINATIONS

**A2**

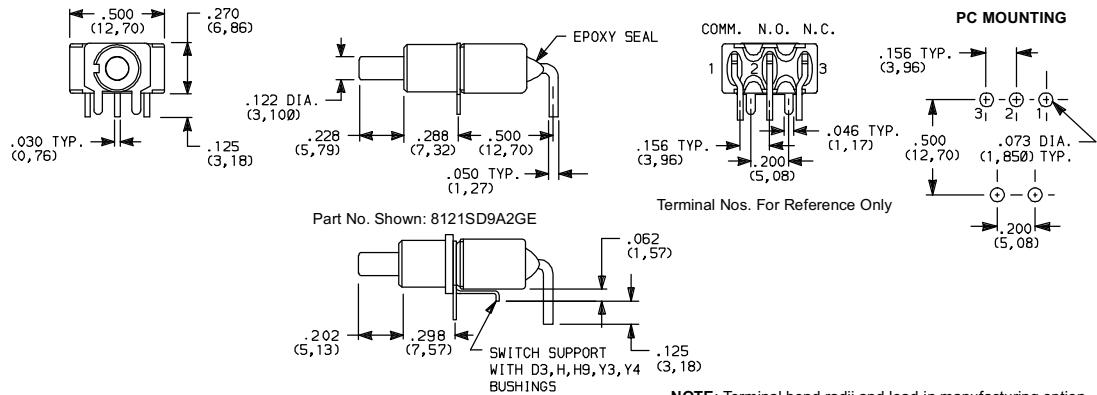


**SPDT Model**

**A4**

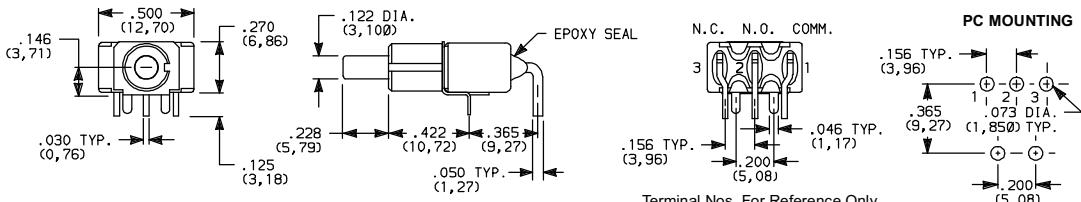


**SPDT Model**

**A6**

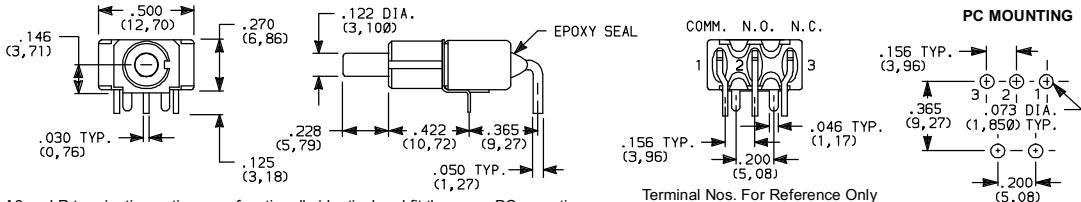


**SPDT Model**

**R**

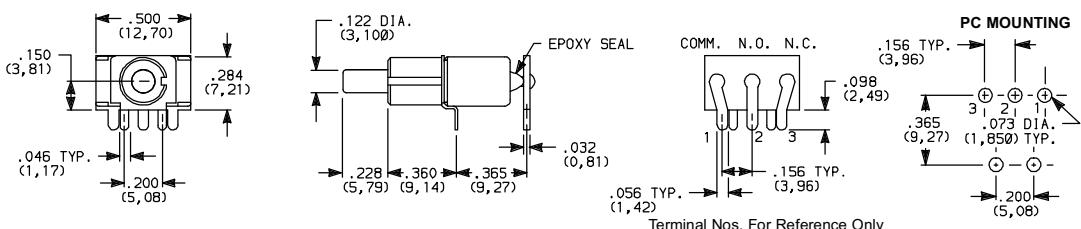

**SPDT Model**

**R2**

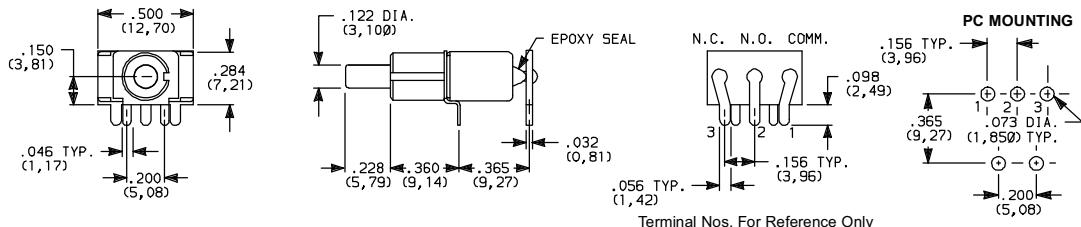






## 8020 Series

# Snap-Acting Momentary Pushbutton Switches

### TERMINATIONS

**AV2**

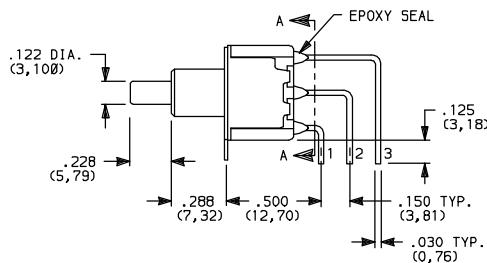



Terminal Nos. For Reference Only

#### SPDT Model


Part No. Shown: 8121SD9AV2GE

NOTE: Terminal bend radii and lead-in manufacturing option. Not available with JXX actuators and I seal.

**AV3** SNAP-IN




**AV1, AV4** EXTENDED






OPTION CODE	DIM 'A'
<b>AV1</b>	.15 (3,8)
<b>AV4</b>	.24 (6,1)

PC MOUNTING



**AV2**

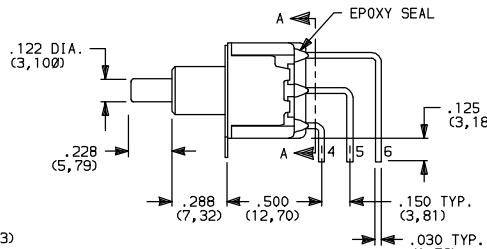



Terminal Nos. For Reference Only

#### DPDT Model


Part No. Shown: 8221SD9AV2GE

NOTE: Terminal bend radii and lead-in manufacturing option. Not available with JXX actuators and I seal.

**AV3** SNAP-IN




**AV1, AV4** EXTENDED



OPTION CODE	DIM 'A'
<b>AV1</b>	.15 (3,8)
<b>AV4</b>	.24 (6,1)

PC MOUNTING








## 8020 Series

# Snap-Acting Momentary Pushbutton Switches

### TERMINATIONS

**AV2**

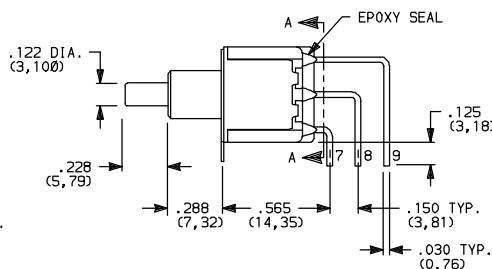

**SECTION A-A**



Terminal Nos. For Reference Only

### 3PDT Model


Part No. Shown: 8321SD9AV2GE

**NOTE:** Terminal bend radii and lead-in manufacturing option.  
Not available with JXX actuators and I seal.

**AV3** SNAP-IN




**AV1, AV4** EXTENDED



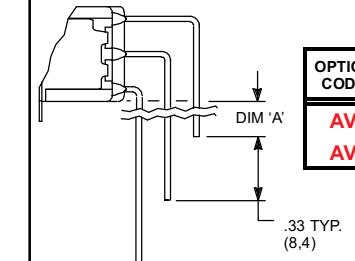


OPTION CODE	DIM 'A'
<b>AV1</b>	.15 (3.8)
<b>AV4</b>	.24 (6.1)

**PC MOUNTING**



**AV2**

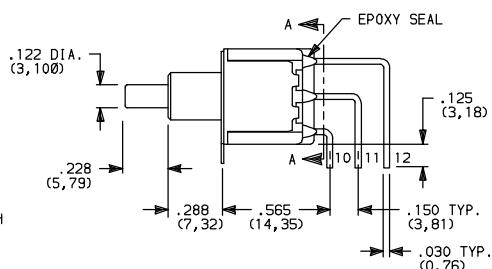

**SECTION A-A**



Terminal Nos. For Reference Only

### 4PDT Model


Part No. Shown: 8421SD9AV2GE

**NOTE:** Terminal bend radii and lead-in manufacturing option.  
Not available with JXX actuators and I seal.

**AV3** SNAP-IN




**AV1, AV4** EXTENDED

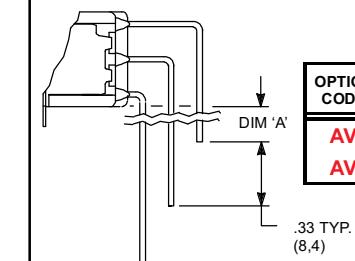

OPTION CODE	DIM 'A'
<b>AV1</b>	.15 (3.8)
<b>AV4</b>	.24 (6.1)

**PC MOUNTING**



COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936




## 8020 Series



# Snap-Acting Momentary Pushbutton Switches

### TERMINATIONS

**V2, V6, V7, V8** REPLACES V20, V60, V70, V80

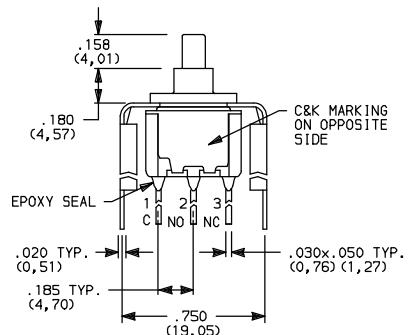


Terminal Nos. For Reference Only.



Part No. Shown: 8121SD3\_GE

NOTE: Not available with JXX actuators and I seal.


**V21, V61, V71, V81** SNAP-IN





OPTION CODE	DIM 'A'
<b>V2, V21</b>	.555 (14, 10)
<b>V6, V61</b>	.460 (11, 68)
<b>V7, V71</b>	.630 (16, 00)
<b>V8, V81</b>	.953 (24, 21)

SPDT Model

**V2, V6, V7, V8** REPLACES V20, V60, V70, V80

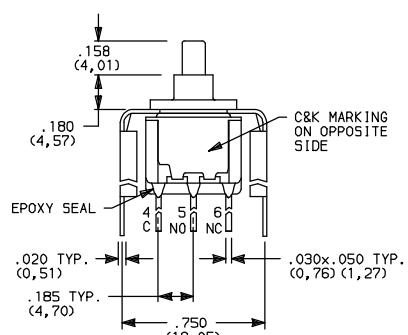


Terminal Nos. For Reference Only.

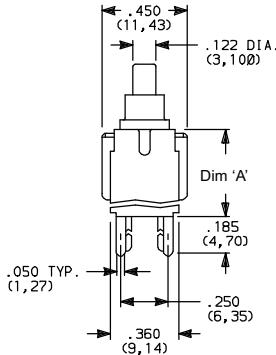

Part No. Shown: 8221SD3\_GE

NOTE: Not available with JXX actuators and I seal.

**V21, V61, V71, V81** SNAP-IN



OPTION CODE	DIM 'A'
<b>V2, V21</b>	.555 (14, 10)
<b>V6, V61</b>	.460 (11, 68)
<b>V7, V71</b>	.630 (16, 00)
<b>V8, V81</b>	.953 (24, 21)

DPDT Model





COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936




## 8020 Series

# Snap-Acting Momentary Pushbutton Switches

### TERMINATIONS

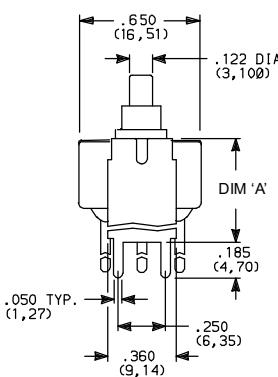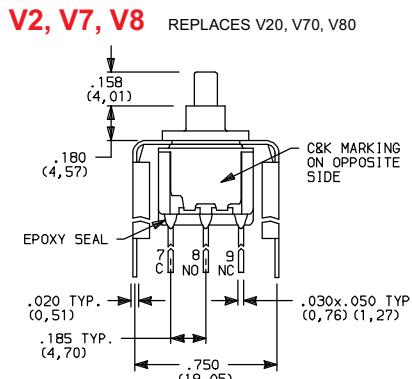



PC MOUNTING



Part No. Shown: 8321SD3\_\_GE



NOTE: Not available with JXX actuators and I seal.

**V21, V71, V81** SNAP-IN




OPTION CODE	DIM 'A'
<b>V2, V21</b>	.555 (14, 10)
<b>V7, V71</b>	.630 (16, 00)
<b>V8, V81</b>	.953 (24, 21)

3PDT Model

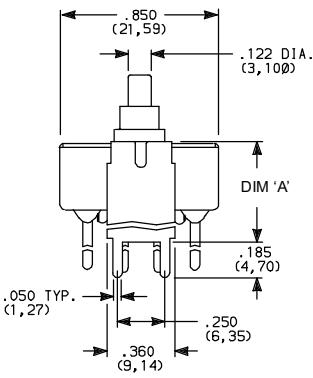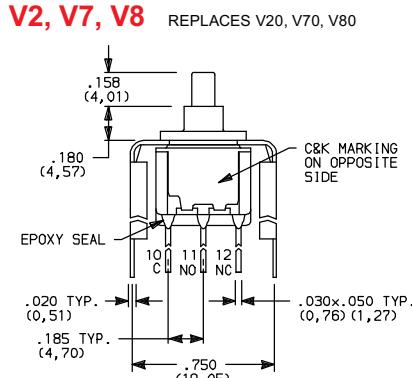



PC MOUNTING



Part No. Shown: 8421SD3\_\_GE

NOTE: Not available with JXX actuators and I seal.

**V21, V71, V81** SNAP-IN



OPTION CODE	DIM 'A'
<b>V2, V21</b>	.555 (14, 10)
<b>V7, V71</b>	.630 (16, 00)
<b>V8, V81</b>	.953 (24, 21)

4PDT Model



COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936




## 8020 Series

# Snap-Acting Momentary Pushbutton Switches


### TERMINATIONS




#### V3, V4, V9 REPLACES V30, V40, V90

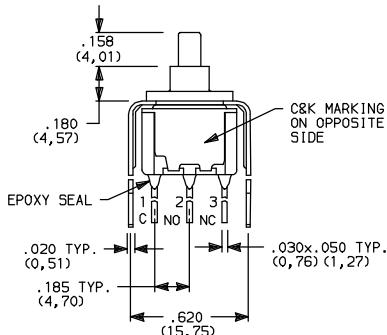

Terminal Nos. For Reference Only.




PC MOUNTING



NOTE: Not available with J8X actuators and I seal.

#### V31, V41, V91 SNAP-IN




OPTION CODE	DIM 'A'
V3, V31	.460 (11,68)
V4, V41	.630 (16,00)
V9, V91	1.150 (29,21)


SPDT Model




#### V3, V4, V9 REPLACES V30, V40, V90

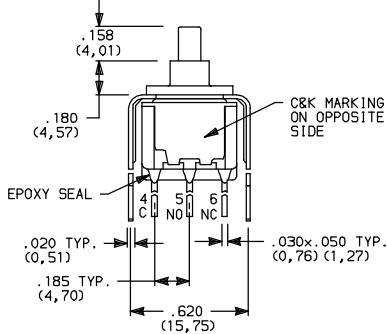

Terminal Nos. For Reference Only.





PC MOUNTING



NOTE: Not available with J8X actuators and I seal.

#### V31, V41, V91 SNAP-IN



OPTION CODE	DIM 'A'
V3, V31	.460 (11,68)
V4, V41	.630 (16,00)
V9, V91	1.150 (29,21)

DPDT Model



COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936



## 8020 Series



# Snap-Acting Momentary Pushbutton Switches

### TERMINATIONS




**V4, V9**

REPLACES V40, V90

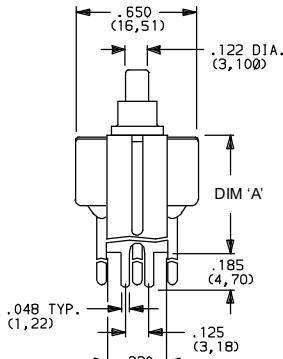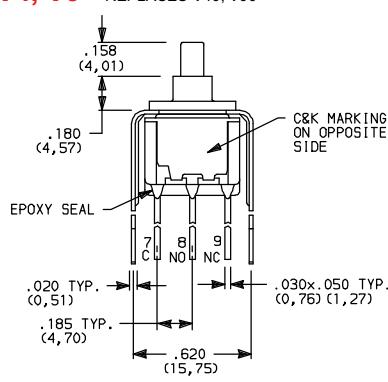



PC MOUNTING



Part No. Shown: 8321SD3\_\_GE

NOTE: Not available with JXX actuators and I seal.

**V41, V91** SNAP-IN





OPTION CODE	DIM 'A'
<b>V4, V41</b>	.630 (16,00)
<b>V9, V91</b>	1.150 (29,21)

3PDT Model




**V4, V9**

REPLACES V40, V90

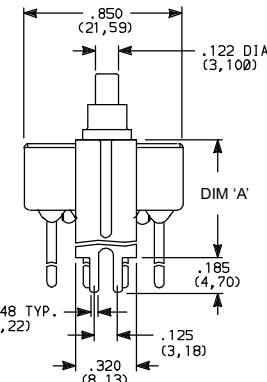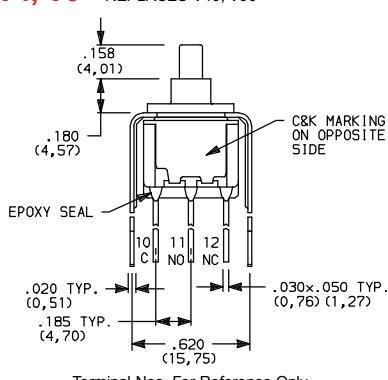



PC MOUNTING



Part No. Shown: 8421SD3\_\_GE

NOTE: Not available with JXX actuators and I seal.

**V41, V91** SNAP-IN



OPTION CODE	DIM 'A'
<b>V4, V41</b>	.630 (16,00)
<b>V9, V91</b>	1.150 (29,21)

4PDT Model



COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936



## 8020 Series

# Snap-Acting Momentary Pushbutton Switches

### CONTACT MATERIAL

OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATINGS	
B	GOLD 1	GOLD <sup>1</sup>	LOW LEVEL / DRY CIRCUIT	
K		TIN-LEAD <sup>4</sup>		
G	GOLD OVER SILVER 2,3	GOLD <sup>3</sup>	8X21, U8X1 MODELS ONLY: 0.4 VA MAX @ 20 V AC OR DC MAX. OR 1 AMP @ 120 V AC OR 28 V DC;	
L		TIN-LEAD <sup>4</sup>		

CONTACT MATERIAL / APPLICATION RECOMMENDATIONS – SEE CHART, PAGE X.

1 ALL CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.  
2 N.O. & N.C. CONTACTS: Coin silver, with gold plate over nickel plate.

3 COMMON CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.

4 TERMINALS: Copper alloy, with tin-lead alloy over nickel plate.

U811-U841 models with all options (except R, R2 terminations) when ordered with mandatory G or L contact material.

See AGENCY APPROVALS, page VIII.


B or K contact material must be ordered with 8X25 models.

G or L contact material must be ordered with 8X21, U8X1 models.


K and L contact material not available with Z, Z3 terminations.

### SEAL

E (STD.)



I

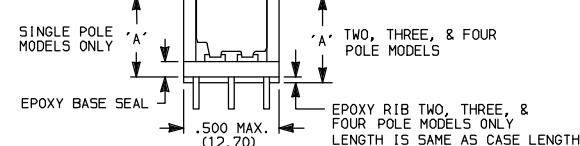

NO. POLES	DIM 'A'
SP	.410 (10,41)
DP	.440 (11,18)
3P	.505 (12,83)
4P	.505 (12,83)

NOTE: Available with C, W-W4, Z, Z3 terminations only.

### HOW TO ORDER

All available 8020 SERIES SNAP-ACTING MOMENTARY PUSHBUTTON SWITCH options are listed on page C-2 and are described on pages C-4 thru C-17. Switches with standard options are shown on page C-3. When selecting options and building a part number, some ordering format boxes may not be filled. Dashes, hyphens or spaces in the part number are not significant, and are shown for clarity only. All models have epoxy terminal seal and are compatible with 'bottom wash PC board cleaning methods. Actuator caps, frames, hardware and accessories are available separately, see section K. Custom actuator markings and legends available, consult factory.

### SPECIFICATIONS

#### CONTACT RATING:

8X21, U8X1 MODELS: 1 AMP @ 120 V AC or 28 V DC or 0.4 VA max. @ 20 V AC or DC max. (G contact material).

8X25 MODELS: 0.4 VA max. @ 20 V AC or DC maximum (B contact material).

NOTE: Break-before-make contacts. Multi-pole contact do not make and break simultaneously.

ELECTRICAL LIFE: 60,000 make-and-break cycles at full load.

CONTACT RESISTANCE: Below 50 milliohms typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE:  $10^9$  ohms min.

DIELECTRIC STRENGTH: 1,000 V RMS min. @ sea level.

OPERATING TEMPERATURE: 8X2X MODELS: -30°C to 75°C. U8X1 MODELS: -30°C to 65°C.

CAP INSTALLATION FORCE: 10 lbs. max. permissible.

SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

### MATERIALS

CASE: Glass filled nylon 6/6, flame retardant, heat stabilized or diallyl phthalate (DAP) (UL 94V-0).

PLUNGER: Glass filled nylon or glass filled polyester (UL 94V-0).

CAP & FRAME: Nylon, black, standard.

BUSHING: Brass or zinc, nickel plated.

HOUSING: Stainless steel.

SWITCH SUPPORT: Brass or steel, tin plated.

#### N.O. & N.C. CONTACTS

8X21, U8X1 MODELS: Coin silver, with gold plate over nickel plate (G contact material).

8X25 MODELS: Copper alloy, with gold plate over nickel plate (B contact material).

COMMON CONTACT & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.

TERMINAL SEAL: Epoxy.

HARDWARE: Nut & Locking Ring: Brass, nickel plated; Lockwasher: Steel, nickel plated.

NOTE: Specifications and materials listed above are general specifications for switches with standard options. For information on specific and custom switches, consult factory.



COMPONENTS, INC. 57 Stanley Avenue, Watertown, MA 02172 Tel: (617) 926-6400 Fax: (617) 926-6846 Sales: (800) 635-5936